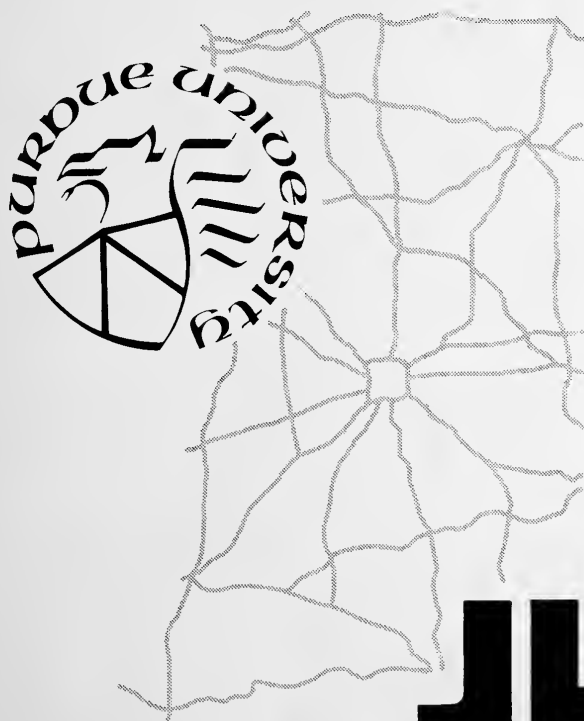# OPERATIONAL PLANNING OF FIXED-ROUTE AND DEMAND-RESPONSIVE BUS SYSTEMS IN GREATER LAFAYETTE AREA

SEPTEMBER 1973 — NUMBER 22

BY

A.G. HOBEIKA

JHRP

JOINT HIGHWAY RESEARCH PROJECT

PURDUE UNIVERSITY AND
INDIANA STATE HIGHWAY COMMISSION

Final Report

OPERATIONAL PLANNING OF FIXED-ROUTE AND DEMAND-RESPONSIVE
BUS SYSTEMS IN GREATER LAFAYETTE AREA

TO: J. F. McLaughlin, Director   September 14, 1973
        Joint Highway Research Project
                                            Project: C-36-74D
FROM: H. L. Michael, Associate Director
        Joint Highway Research Project   File: 3-9-4

      Attached is a Final Report titled "Operational Planning of
Fixed-Route and Demand-Responsive Bus Systems in Greater
Lafayette Area" which has been authored by Mr. Antoine G. Hobeika
under the direction of Professor G. T. Satterly of our staff.
This research was sponsored by the School of Civil Engineering
in cooperation with the Greater Lafayette community in the
planning of fixed-route and demand-responsive bus systems for
the community. The fixed route system has been implemented
and the demand-responsive system is now planned for implementation
in early 1974. Mr. Hobeika also used the research report as
his thesis for the Ph.D. degree.

      Although the research was not sponsored by the Indiana
State Highway Commission, it is presented to the JHRP Board in
line with our policy of making available to its members as
information related research conducted by the School of Civil
Engineering.

                              Respectfully submitted,

                              Harold L. Michael

                              Harold L. Michael
                              Associate Director

HLM:ms

Final Report

OPERATIONAL PLANNING OF FIXED-ROUTE AND DEMAND-RESPONSIVE BUS SYSTEMS IN GREATER LAFAYETTE AREA

by

Antoine G. Hobeika
Graduate Instructor in Research

Joint Highway Research Project

Project No.: C-36-74D

File No.: 3-9-4

Purdue University
West Lafayette, Indiana
September 14, 1973

"If there is technological advance without
social advance, there is almost automatically
an increase in human misery."

Michael Harrington
"The Other America" - 1962

ACKNOWLEDGMENTS

TABLE OF CONTENTS

TABLE OF CONTENTS (Continued)

TABLE OF CONTENTS (Continued)

LIST OF TABLES

LIST OF FIGURES

LIST OF FIGURES (Continued)

LIST OF FIGURES (Continued)

ABSTRACT

Hobeika, Antoine George, Ph.D., Purdue University, August,
1973. Operational Planning of Fixed-Route and Demand-
Responsive Bus Systems in Greater Lafayette Area. Major
Professor: Gilbert T. Satterly, Jr.

Many small urban areas in the United States are trying
to revive their bus public transportation. Some of them
are intending to implement, in addition to the conventional
bus system, a new bus system that has close attributes to
the automobile, a demand-responsive system known as Dial-
A-Ride. The Greater Lafayette Area in Indiana, is one of
these small urban areas. This research suggests the proper
combination of two bus modes, the fixed-route and the
demand-responsive bus systems, that best serves the various
demand levels at a level of service required by the
customer, using Greater Lafayette Area as a case study.

A simplified procedure was developed to design the
fixed route of the bus system of the Greater Lafayette
Area. Fifteen buses of 25 to 30 passenger seats running
at half hour headways are needed to provide a mean level
of service of 2.3 to 2.5 times the mean auto travel time.
The level of service was measured by the total time spent
by the users on the bus system.

Computer simulation was used to duplicate the operations of the Dial-A-Ride system in real environment. The system operates on many-to-many basis (many origins to many destinations) with computer dispatching. The number of small buses needed to satisfy the demand levels of 30 calls per hour to 150 calls per hour had been investigated for different levels of service.

Cost comparisons of the two systems provided the feasible operation of the two bus modes for various demand levels under the same level of service. The results show that the fixed-route system best serves the high demands, demands that are greater than 90 persons per hour. The Dial-A-Ride system best serves the lower demands, demands of 90 calls per hour and less.

No generalization of the results could be reached at this point in time, except for small urban areas similar in size and in structure to Greater Lafayette Area.

CHAPTER 1: INTRODUCTION

Urban Transportation Problems

Scientific and technological developments have pro-
foundly altered man's institutions, his life style, and
his aspirations in the last several generations. The
technological developments brought about by the transport
industries were the main forces behind these changes.
This research concentrated mainly on intra-urban passenger
transportation and its role as an urban-shaping force.
Movement of goods, though equally important, was beyond
the scope of this study.

According to Lyle C. Fitch, American cities, which
originally were closely clustered around oceans or river-
ports, have been conditioned as to development, shape and
life by a series of transportation technological develop-
ments. Fitch describes the four major transportation
developments as follows:

> First was the railroad, which freed industry
> and commerce from exclusive dependence on ports,
> linked cities with hinterlands and other cities.
> The railroad encouraged suburban towns to
> develop along radial lines from the city core .
>
> A second major technolgoical development
> was the high speed elevator which spread cities
> into the third dimension. It made possible
> great increases in land-use densities, and
> created problems of integrating horizontal and
> vertical movement.

Third was the motor vehicle; it loosened
the bonds which historically had tied many
activities to the central city and transformed
drastically the city-suburban structure and
its functions.

Fourth was the airplane; though it is not
a significant intra-urban transportation mode,
it has had several important urban-shaping
effects. Air transportation links many urban
residents more closely to the outside world in
ways that affect their working and living
patterns. Large city airports tend to become
major subcentres because they are large
employers themselves and because they attract
many different types of economic activity (4).*

In spite of all the technological developments, the

transportation system is one of the many things which

presently seem to be growing no better in urban regions.

The transportation system offers nearly a mile of street

or road for every square mile of land and yet, provides no

relief from time-consuming, and wasteful congestion.

The transportation system lays out new freeways to

accommodate the increase in number of cars in growing

cities and suburbs, and in doing so disrupts the neighbor-

hood, damages the countryside, and fouls the air with

exhaust from automobiles. In addition, the transportation

system could not find a way to prevent the death of 50,000

people each year on highways and streets.

---

*Numbers in parentheses refer to entries in the List of
References.

These pressing problems in the transportation system were so apparent in the last decade that they required action from the presidents of the United States.

President John F. Kennedy was the first president to send a special message to Congress on the subject of transportation. In his message, "The Transportation System of Our Nation," on April 5, 1962, he comments on the urban transportation problems as follows:

> Our national welfare therefore requires the
> provision of good urban transportation, with
> the properly balanced use of private vehicles
> and modern mass transport to help shape, as
> well as serve, urban growth (12).

President Lyndon B. Johnson, in his message "Transportation for America" to the congress on March 2, 1966, summarizes the shortcomings of the transportation system:

> America today lacks a coordinated transpor-
> tation system that permits travellers and
> goods to move conveniently and efficiently
> from one means of transportation to another,
> using the best characteristics of each (11).

President Richard M. Nixon, in a proclamation on March 31, 1971, said:

> We are now entering into a new era in
> transportation, an era in which our national
> mobility will demand the continued conquest
> of time and space; yet, our national
> conscience will not longer permit irreparable
> damage to our land, our environment, or the
> social fabric of our communities. It is in
> this light that transportation faces its
> challenge of the future.

> To meet that challenge, we will need a
> wholly balanced transportation system - a
> system that provides our citizens with the
> ability to choose the most efficient means of

transportation at the least possible cost to
themselves and to the environment. I ask for
the help of all citizens in achieving this
goal (16).

A coordinated and balanced transportation system seems
to be the answer to the transport problems in American
cities. But many experts do not fully support this
answer. On one side, the environmentalists and the
ecologists think that the American public and the auto-
mobile are in a life and death struggle. According to
ecologist Kenneth P. Cantor:

The car is robbing the American people of
their land, air, minds, and their very lifes.
It is becoming increasingly clear that the
solution of the transportation-automobile
problem is of high priority if we are to come
to terms with the environment and with our-
selves (2).

A. Q. Mowbray, in his book Road to Ruin, asks to take
the streets away from the private automobile in American
cities and give them back to the people. He considers
that such a step would be judged insane by the society,
but he believes that it must be taken someday to save the
lives of the people:

Population grows, asphalt spreads, and land
diminishes, and there is a finite end to it
all. Long before the limit is reached, the
environment will have become utterly hostile
to human life (14).

On the other side, the road and auto advocates
consider that the backbone of the economic growth of the
United States is the vast networks of highways and

Interstate roads. A study financed by American Association
of State Highway Officials (A.A.S.H.O.) shows clearly that:

> The automobile is by far the most important
> mode of travel to the American household. . .
> Nearly all change in family situations and
> community developments tend to increase the
> use of the automobile, leading to the con-
> clusion that the automobile will become even
> more important in the years ahead.
>
> There appears to be close 'ego-involvement'
> with the automobile as a way of life.
>
> The attitude toward existing public trans-
> portation service and facilities tend to be
> generally negative than positive (15).

The report concludes that "highways will be the dominant
force and a major transportation mode in all areas of the
United States for years to come."

The transportation mode that will be dominant in the
future remains a matter of considerable debate. However,
many experts feel that a proper mix of the different
transportation modes would attempt to solve the transport
problem in most American cities. The ideal, of course,
would be to have each of the general modes - private
transport and mass transport - do the job that it does
best. Private transport, known for its extreme flexibility,
comfort, speed, and privacy will probably remain the type
of transportation most desirable and most economical for
both individual and society as a whole for a wide variety
of trips involving metropolitan areas. Where many persons
must use the same space at the same time, mass transport,
because of its economical use of space and its ability to

handle large numbers of people, is generally deemed to have the advantage as far as the effective use of space-resources is concerned (20). At the same time, public transport is a necessity for those people who cannot, or choose not, to drive to achieve their travel needs.

Clearly there is a need for the proper combination of facilities and hardware in the transport systems. How this proper combination can be achieved is still a matter of discussion and research among the experts in the field of transportation.

The first step taken by the federal government to assist in achieving a balanced transportation system was initiated through the passage of the legislation of The Urban Mass Transportation Act of 1964. The legislation was signed into law by President Johnson on July 9, 1964. The program provides federal grants to assist public agencies and local bodies in providing capital facilities and equipment for use in public transportation service in urban areas. The legislation allows the federal government to contribute up to two-thirds of the cost of new equip-ment and facilities. The other one-third of the cost must be provided by local funds. The legislation specified that a continuing program of comprehensive planning is necessary in any given city or metropolitan area in order for it to qualify for the capital grants. This financial incentive reinforces the new federal policy of coordinating transport

programs with other aspects of urban development.

Federal money is also available through the 1964 Act
to Research, Development and Demonstration Projects which
"will assist in the reduction of urban transportation needs,
the improvement of mass transportation service, or the
contribution of such services toward meeting total urban
transportation needs at minimum cost" (22). The 1966
Amendments to the Urban Mass Transportation Act of 1964
made federal money also available, on a matching basis,
for the technical studies that are required before
application for a federal capital grant can be initiated.
Aid was also provided for a new program of management-
training grants, thus recognizing the vital need to improve
the caliber of management in the mass-transit field. Aid
programs to colleges and universities were also provided
for research and training to foster comprehensive studies
on urban transportation problems.

Problem Statement

Public transportation in the Greater Lafayette Area
of Indiana prior to April 1973 , gives a typical example
of the decline of transit operations in small cities.
With the advent of the automobile, people were no longer
restricted to walking distances or specific transit routes.
The automobile gave them total flexibility in movement
and in choice of residence. This dependence upon the

automobile led to urban sprawl, and to the dispersion of urban activities, resulting in an increase of spatial separation between people and activities.

The past and existing transit systems, being structured mainly to serve the downtown area or central business district, were unable to meet the basic change in the demand structure for movement in the city. Loss of patronage to the transit system resulted, and people became more and more dependent on the automobile to satisfy their travel needs. This continuous decline in transit patronage resulted in continuous decrease in passenger revenues, and coupled with continuous increase in operating costs, resulted in a transit system that is not economically viable. Being economically infeasible, combined with the inability of transit management to modify the system to meet public demand, resulted in curtailment in the transit routes, and finally to its abandonment to public ownership. The deterioration of public transportation has left a portion of urban citizens at a disadvantage in achieving their travel needs. The group of citizens that are dependent upon public transportation for movement include: 1) the elderly who cannot or choose not to drive; 2) the young; 3) the secondary worker and the housewife with no automobile available for their tripmaking; and 4) the poor. Depriving these people of complete mobility limits their social,
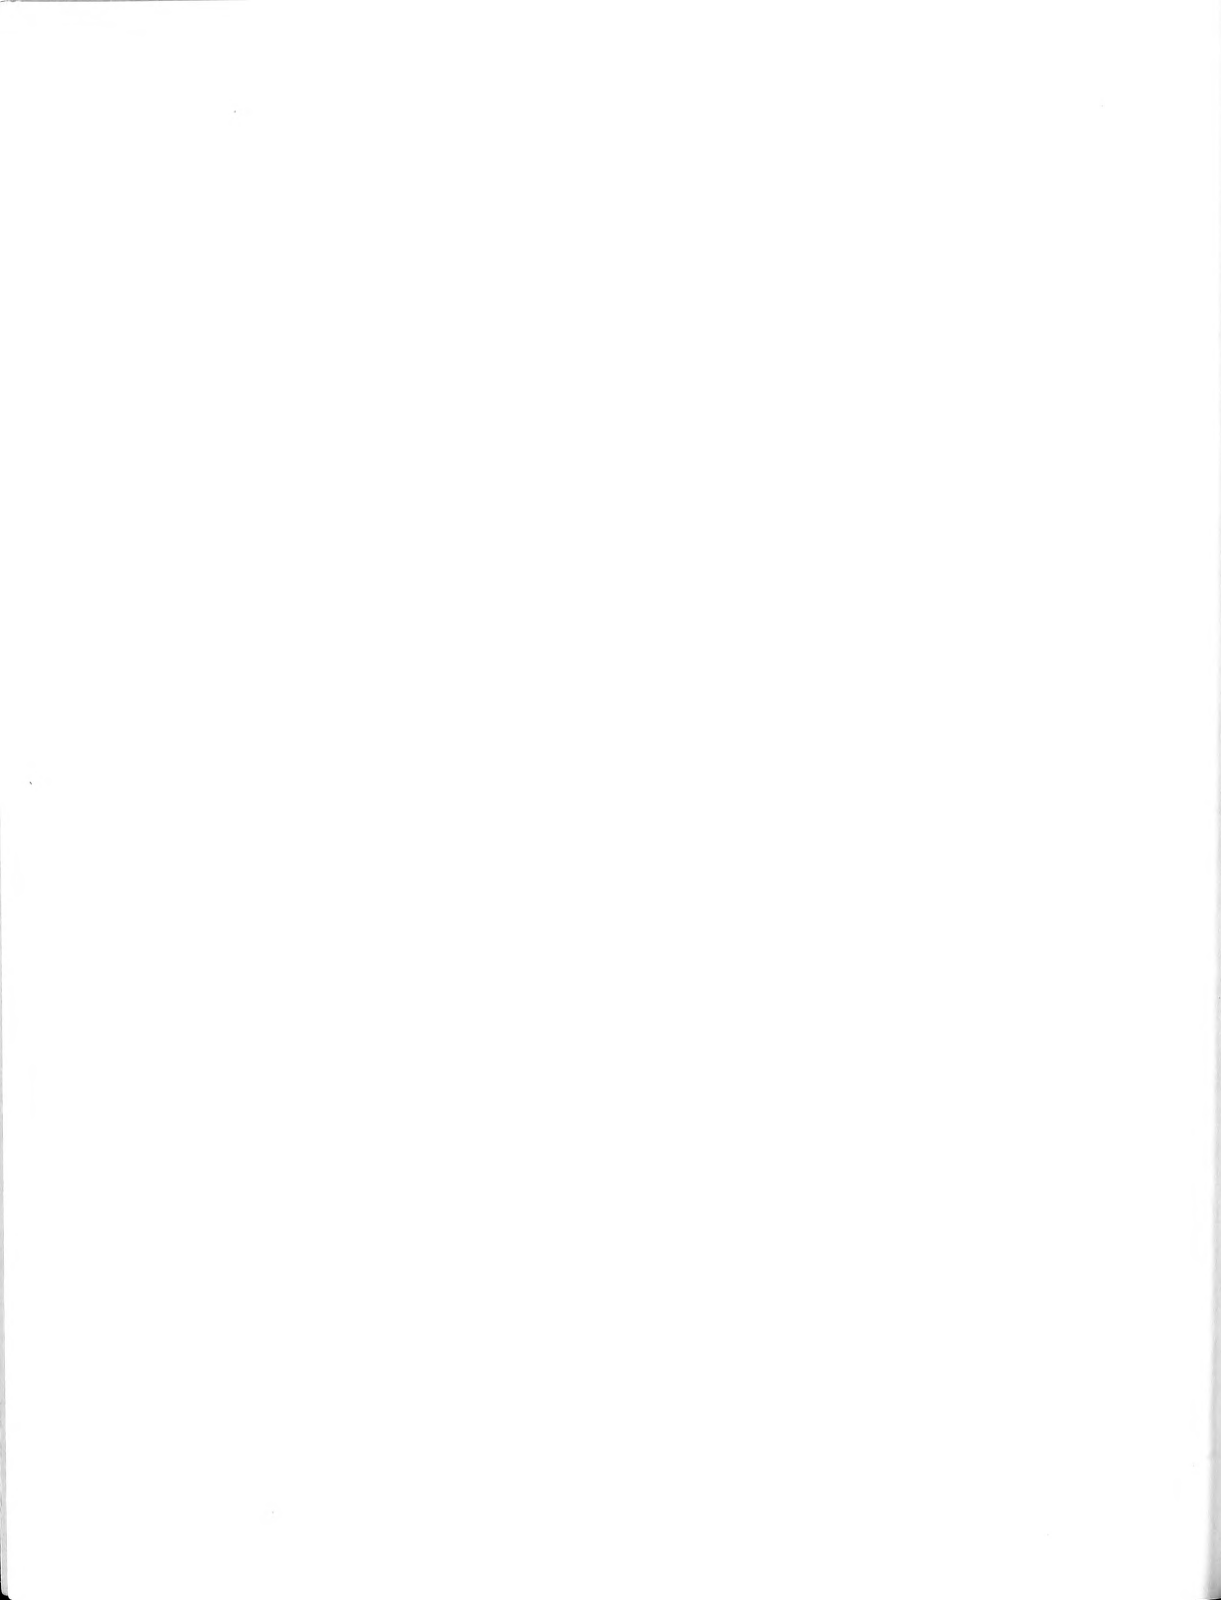
economic, and cultural opportunities and makes the quality of their urban life miserable in comparison with the other more mobile groups of the community.

The city of Lafayette agreed to the assumption of the public transportation system in the Greater Lafayette Area in July 1970. The elected officials of the two cities then formed a Mass Transit Authority which took over the operation of the bus system in the latter part of 1971.

When the Authority took over the operation, it found that there was no equipment that could be termed safe for operation. The newest bus was at least twenty years old and there were at least three breakdowns a day on the routes. The bus system was composed of six buses operating on four fixed routes. According to a study done in November 1970, the ridership on the system amounted to less than a thousand persons on the average day. Most of these riders were captive riders. That is to say the riders had no other alternative for making their trip. Very few, if any, of the ridership desired to use public transportation in the Greater Lafayette Area. They simply had no other means of transportation.

This attitude toward the existing bus system is explainable by the fact that most of the riders were dis-contented with the level of service provided and with the condition of equipment.

The city officials recognizing the plight they were in, directed the Mass Transit Authority to implement a new bus system in the city. The Mass Transit Authority agreed to buy 16 new middle size buses to operate on fixed routes during the peak hours, and 10 small buses to operate on dynamic and flexible routes on the off-peak hours using the demand-responsive bus concept, usually known as Dial-A-Ride. To obtain the money needed to re-build the system the Authority applied for the federal money available for the two-thirds of the capital invest-ments provided by the Urban Mass Transportation Act of 1964. The local matching money was obtained from general obligation bonds bought by the local banks and will be repaid by means of general tax revenues.

Purpose and Scope of the Study

The main purpose of this study was to investigate the proper combination of fixed-route and demand-responsive bus systems that would best serve different demand levels at a required or given level of service. In achieving this purpose four objectives were developed.

The first objective was to develop a methodology for the design of the fixed-routes of a bus system in a small urban area . This methodology was used to develop the fixed-routes of the Greater Lafayette Area bus system, using the number of buses available for

service. Fifteen buses, following the recommendation of
the Greater Lafayette Bus Transit Study were available for
the new service. Factors needed for the design such as
the characteristics of the Greater Lafayette Area and of
the   old   bus system were also included in the analysis.

The second objective was to predict the number of
buses required to provide a demand-responsive bus system
in off-peak periods in the Greater Lafayette Area. The
system as planned will operate on many-to-many basis
(many origins to many destinations) with computerized
dispatching. This was studied for different demand levels
and various levels of service required by the customers.
Computer simulation was used to duplicate the real world
environment, to evaluate the system, and to arrive at some
operating decisions for real performance.

The third objective was to make cost comparisons
between the two bus systems and to find out which system
would be cheaper to implement for the different demand
levels. The cost elements of each system were also
identified. The costs were divided into capital costs and
operating costs.

The fourth and last function was to evaluate the
proper combination of the two systems.

CHAPTER 2:   RELATED WORKS

Fixed-Route Bus System

Public transportation may be divided into four main
subsystems: the demand subsystem, the management and
control subsystem, the operative subsystem, and the
physical subsystem. This division is depicted graphically
in Figure 2-1.

The demand subsystem is the most important function of
the mass transit industry because it determines the success
as well as the failure of the system. One of the main
objectives of transit management is to monitor the
attitudes of the public with respect to the service, to
find out means of attracting the non-user and to forecast
the future demand. Extensive research has been done in
the area of demand evaluation and demand forecasting for
public transports. Estimates for the future demand for
public transportation have been incorporated as part of
the continuing comprehensive transportation planning
process for urban areas. The main consideration is to
find out how many of the total generated trips for a
certain study area will go by public mass transit or by
private automobile. The name given to the models that
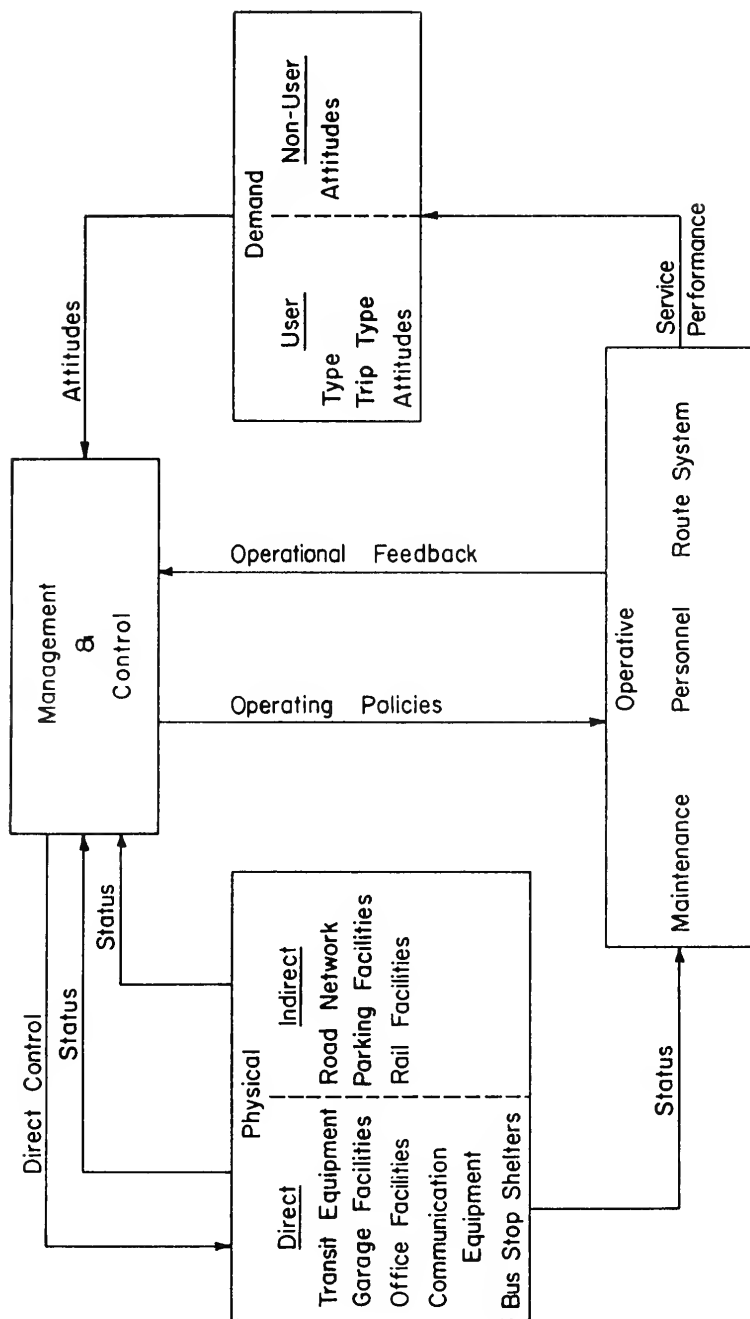
FIGURE 2-1 THE MAIN SUBSYSTEMS OF PUBLIC TRANSPORTATION

have been developed to estimate the future intra-city
travel demand by alternative modes of transportation is
"modal split." These models have used different factors
in determining the "modal split." However, the
significant factors could be grouped into three major
categories: 1) characteristics of the trip, 2) character-
istics of the trip-maker, 3) characteristics of the
transportation system (3).

In this study, no attempt was made to estimate the
demand for public transportation at a future date for
Lafayette, Indiana. It is considered that any survey
analysis of the public attitudes with the existing
deteriorated bus system would lead to biased conclusions.
Instead, a range of values of the feasible demand set was
considered in the design of the demand-responsive bus
system. The fixed-route bus system is considered to be
inelastic to low demand volumes usually existent in small
urban areas, with respect to the route's development. It
is rather affected by the demand distribution which was
used in developing the fixed routes of the bus system.

Little attention has been given to the management and
control subsystem of public transportation. A handbook for
small cities on mass transit management (23) had been
published by the Institute for Urban Transportation,
Indiana University, Bloomington, Indiana. The aim of the
handbook is to provide information for the management of

small transit systems particularly found in smaller cities
in the United States. It emphasizes that management should
provide a service quality that meets the consumer needs
and desires at a cost carefully calculated and controlled,
rather than to provide a minimum of servide at the lowest
possible cost. The MITRE Corporation under the sponsor-
ship of the Office of Research, Development,and
Demonstration, Urban Transportation Administration, had
developed a Run Cutting and Scheduling (RUCUS) computer
package (18) to assist the management of large transport
systems in sheet development, vehicle scheduling, and
driver run cutting. Rescheduling of transit property,
which occurs two to four times a year, requires the
revision of timetables based on ridership patterns and
then the reallocation of transit company resources -
vehicles and drivers - to the revised time tables. Computer-
ization of these activities would save extensive amounts
of time spent on these tasks by the experienced people of
the scheduling department. This research did not discuss
the management and control function of the transit system
because it is outside the scope of its study.

The physical subsystem has been receiving a great
deal of attention lately, especially in large urban areas.
Improvements in the design of transit equipment,
communication equipment, and transfer facilities are very
carefully studied and extensive research is still going on

in this area. The Chicago Transit Authority had developed
a communication and surveillance system to control the
proper headways between buses and to eliminate unnecessary
delays at the different routes of the bus system. Traffic
management for bus priority treatments (13) has been
increasingly studied and implemented throughout the world.
Its aim is to improve the service quality of bus transit
bringing rapid transit to many large communities. These
priority treatments include reserved bus lanes on downtown
city streets, special bus streets, contra-flow bus lanes
on expressways, special bus lanes on freeways, special bus
ramps for express bus service, metered freeway ramps with
bypass lanes provided for buses and many others. They are
mainly found or proposed in large American cities. The
greater Lafayette Area will not require in the near future
these specialized treatments due to the dimensions of its
area, the dimensions of its traffic volume and the
dimensions of its bus use.

The operative subsystem is one area which has remained
relatively untouched. The system-wide configuration of
bus routes, which is the working skeleton of the transit
system, has received little study. The bus routes are
being developed on a qualitative basis, using a number of
routing and operating criteria to judge the route network.
Computer simulation has been used to evaluate the operation
of a specific bus route after it has been designed and

implemented. After the actual demand on the bus-route has been gathered, sensitivity analysis through computer simulation would allow the modification of the schedules and initial timetables to achieve the desired quality of service required by the consumers. Testing of alternative route configurations through computer simulation to choose the optimum system had been investigated (24). It was found to be ineffective, requiring an extensive amount of computer time and offering no better results than qualitative evaluation. A man-computer interactive graphic system, (17) developed at the University of Washington, was applied to a series of experiments designed to identify the characteristics of high-performance bus rapid transit (BRT) systems for CBD-bound clientele which reside in a generalized suburban corridor. A man-computer interaction for bus-route problem solving could lead to valuable, efficient exploration of the different feasible solutions for large transit systems. This research used the systems analysis approach to develop the different bus-route configurations. It included the definition of the system objectives, the determination of its evaluating criteria, the development and testing of the different route alternatives, and the choice of the best system.

Demand-Responsive Bus System

In contrast to fixed-route bus system, a substantial amount of research has been completed on demand-responsive bus systems. The new concept was initially studied by a group of students at the Massachusetts Institute of Technology while taking an interdepartmental course in the design of an integrated, evolutionary urban transportation system (7). The concept was named "The Genie System." The Genie System made use of low capacity vehicles operating without a fixed route or fixed schedule in suburban areas (low and medium density.) Both route and schedule for all vehicles are decided by a computer reviewing the instantaneous state of demand. This sytem was designed to provide a level of service almost up to the taxi standard (door-to-door service) but with cost greatly reduced by using multi-passenger vehicles. The scope of the Genie system had been limited to the many-to-one, one-to-many problems.

The new concept had received a great deal of attention and acceptance among transportation researchers in universities and in private industries. At Northwestern University a group of graduate students had investigated the feasibility of door-to-door bus service to both dispersed origins and destinations (many-to-many problem) through computer simulation. The simulation model of their demand-scheduled bus system (DSB) (18) assumed a model city

with equally spaced, parallel streets where the buses travel either east or west on the grid before travelling north or south. The decision rules, which assign passengers to the buses, were developed to make the assigning and scheduling process as close to optimal as possible.

In addition, separate research of the system had been developed by the Westinghouse Air Brake Company (WABCO), General Motors Research Laboratory (GMRL), and Ford Transportation Research and Planning Office. This illustrates the interest of the private industries in the new concept. In all the research, computer simulation had been used to evaluate such systems and to arrive at some operating decisions for a real performance or demonstration project. Each group working in this area had proposed somewhat different algorithms for the routing and scheduling of vehicles. As the success of a demand-responsive system might well be within the routing and scheduling ability, a critical review was made of the different routing and scheduling algorithms, highlighting their differences, similarities, and possible limitations (10).

The Transportation Research Department of General Motors Research Laboratories had also conducted a number of research studies to evaluate the technical and economic feasibility and the potential social and political acceptance of such a system within the environment of a

selected case study community. The Transportation Research and Planning Office of Ford Motor Company had done similar research in the area and is acting as technical advisor to certain demonstration experiments, such as the Ann Arbor, Michigan, Dial-A-Ride experiment.

The most extensive research done in this area is the one carried out lately by the several academic departments and the special laboratories of Massachusetts Institute of Technology. The work was initially sponsored through the U.S. Department of Housing and Urban Development and later supported by the U.S. Department of Transportation. About seventy people at M.I.T. were involved in the project. The project was concerned with the evaluation, planning, design, and implementation of demand-responsive "Dial-A-Ride" transportation systems. Around eighteen reports were published to discuss the different research concepts.

This study used the computer simulation package developed at M.I.T. for the design of a Dial-A-Ride system. It is considered at present to be the best available computer simulation of such a system. In addition, it was accessible to the author, and it was easy to adopt to the computer hardware of Purdue University. The use of the simulation model for the design of the Greater Lafayette Area "Dial-A-Ride" system will be discussed in detail in chapter six of this study.

The Dial-A-Ride system has been carried from the concept stage into practical application over the past few years. Several Dial-A-Ride systems have been operating in North America and Europe. Some of them are listed below:

A demand-responsive bus service was first tried in North America in 1964 in Peoria, Illinois, as a weekday subscriber service to take workers from their homes to a factory in the morning and back again at night.

In 1969, in Mansfield, a town of 60,000 in Ohio, the private transit operator experimented with a "Dial-A-Ride" service linking a residential neighborhood to the town's business district. Via a radio-telephone hook-up, passengers whose homes were off the regular route could arrange to be picked up by dialing directly through to the bus driver, who doubled as a dispatcher.

In July, 1970, the Ontario Government introduced a Dial-A-Bus experiment in Bay Ridges, a residential community of 15,000, as a feeder system for the GO Transit commuter rail line. Dial-A-Bus has succeeded there not only as a feeder system, but also as this community's first internal public transit system.

The experiment in Regina, Saskatchewan's capital city, was a joint effort by municipal, provincial and federal governments. The city has a population of 145,000 and a typical low density of 5,000 persons per square mile.

Dial-A-Bus was introduced in 1971 to replace some bus
lines where sagging patronage was creating large deficits.

The United States Department of Transportation, Urban
Mass Transportation Administration and the New Jersey
Department of Transportation, who is the demonstration
sponsor, has approved a Dial-A-Ride project for Haddonfield,
New Jersey, a suburb of Philadelphia. The service started
on February 19, 1972. It provides service from any place
to any place within the service area, (many-to-many). It
operates 24 hours a day, 7 days a week, and 365 days a
year. The control system is operated manually, but it
is hoped that it will utlimately become computer-controlled.
The Mitre Corporation is evaluating the demonstration
from the service standpoint.

CHAPTER 3:   CONCEPTUALIZATION OF OPERATIONAL PLANNING OF
BUS SYSTEMS IN SMALL URBAN AREAS

Random Routes and Fixed Routes

A transportation system in an urban area is divided
into two main subsystems, private and public transportation.
Private transportation can be described as a random-routes
system. With the existing street network in most urban
areas, a traveller going from point A to point B may
randomly choose his route from among many possible
alternative combination of links to reach his destination.
He is not constrained to a fixed rail or a road bed and he
has the ability to change or reverse his direction
according to his wish at any point on the system.

Public transportation, on the contrary, is identified
as a fixed-route system. The user has limited alternatives
to travel from point A to point B in the urban community.
The vehicle is usually constrained to a fixed rail, track,
or road bed. It operates on fixed schedules and stops at
definite points on the route. The user is not able to
change his direction as long as he is riding the same
vehicle. His desired line of travel is constrained by the
desired lines of travel of other users.

Comparing the two systems, without looking to the
side effects, the private system stands out as being more
flexible, less time consuming, and more tailored to the
desires of its users than the public system. In short,
private transportation provides a better service to its
users.

Researchers and professionals in the field of public
transportation, in addition to their contribution to the
conventional fixed-route public transport systems, started
looking for new concepts that might provide some of the
advantages of the random-route system. Some of these new
concepts are the dual-mode system, the personalized rapid
transit, the moving sidewalks, and the demand-responsive
bus system - usually known as Dial-A-Ride system. One of
the most promising new concepts is the Dial-A-Ride system
because it does not require a huge capital investment as
do the other concepts, and the technology needed for its
implementation is available.

The demand-responsive bus system operates essentially
like a shared taxi service. Taxi service, which is in
the domain of public transportation, is the closest to the
random-route system. It offers a door-to-door service,
and the customer has the perogative to go from any point
A to any point B in the urban area. The taxi, however, is
expensive to the customer, requires many drivers, and its
vehicle productivity is low. A demand-responsive bus

system would have a greater vehicle productivity (8 to 20 passengers per hour) depending on the demand level and area size while it offers the same door-to-door service. As with the taxi service, the customer calls the dispatching centre asking for service and gives both his origin and his destination. A vehicle is assigned, either by the dispatcher or through the help of a digital computer, to pick up the customer. After the customer boards the vehicle, he will be taken to his desired destination. While on route, the vehicle will make minor detours to pick up and drop off other passengers. Figure 3-1 shows the routing and scheduling spectrum of the Dial-A-Ride regime with respect to the other conventional public transport systems (5).

In its most sophisticated state, the many-to-many Dial-A-Ride overlaps with the taxi regime. The only important differences are the shared riding, slightly longer travel time, and lower fares. However, there is a large spectrum of potential Dial-A-Ride systems that offer substantially less than full taxi service. These are commonly referred to as many-to-one and many-to-few systems. Many-to-one indicates a focal point for the service such as a town centre, rapid transit station, airport, medical complex, or other major activity centres. The many-to-few concept is an expanded system in which between two or more focal points can be serviced.
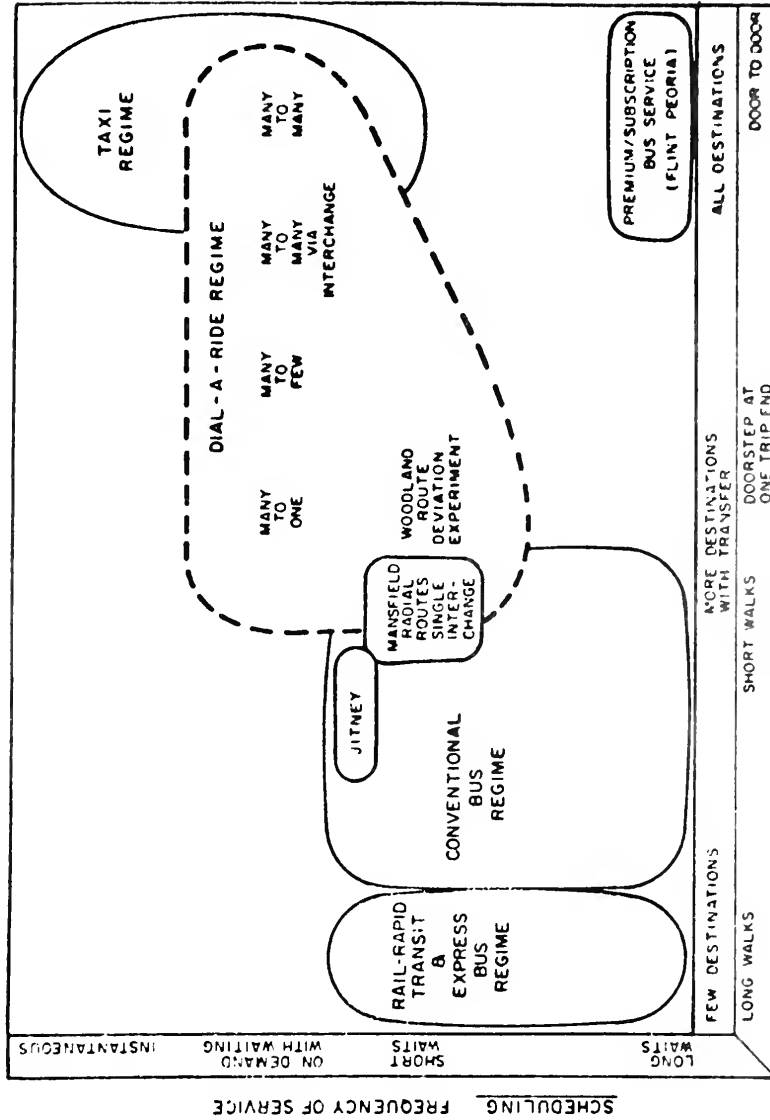
FIGURE 3-1 ROUTING AND SCHEDULING SCHEMATIC FOR PUBLIC TRANSPORT

SYSTEMS (FROM REF 5 , P 52)

Short-Distance Public Transportation

In order to assess the potential markets for the
feasible application of the Dial-A-Ride concept, a brief
look on the components of short-distance public transpor-
tation is necessary. Short-distance transportation
characterizes the intra-city movement, as opposed to long-
distance transportation which characterizes the inter-city
movements. All modes of short-distance transportation
have three main features in common: collection, line-haul,
and distribution. In the random-route system, cars are
collected by the collectors and arterial streets, hauled
by the freeways, and distributed by the arterial streets.
The same concept applies for the movement of people by the
different modes of public transportation. Figure 3-2 shows
the characteristics of each of the three features of
short-distance public transportation and the different
feasible public modes to serve each of them. The list
does not include all the possible modes and concepts in
public transportation sincethe main aim in this exhibit
is to describe the feasible application of the Dial-A-Ride
concept.

From Figure 3-2 it can be seen that demand-responsive
bus system best serves the collection and distribution
spheres of public transportation. It can operate as a
line-haul collector and feeder and as a distributor to
high activity centres such as shopping centres, airports,

Characteristics :

	Collection	Line-Haul	Distribution
	–Many Stops	–Few Stops	–Few Stops
	–Low Density of Demand	–High Density of Demand	–High Density of Demand
	–Low Vehicle Speed	–High Vehicle Speed	–Low Vehicle Speed
	–Small Vehicle Capacity	–Large Vehicle Capacity	–Large Vehicle Capacity
	–Short Travel Distance	–Long Travel Distance	–Short Travel Distance

Feasible Alternative Modes :

Collection	Line-Haul	Distribution
–Demand-Responsive Bus System	–Rapid Bus System	–Personalized Rapid Transit
–Fixed-Route Bus System	–Rapid Fixed Rail	–Demand-Responsive Bus System
–Taxi		–Fixed-Route Bus System
		–Taxi

FIGURE 3-2   CHARACTERISTICS OF SHORT-DISTANCE PUBLIC TRANSPORTATION

medical complexes, and others. In small cities and new towns, where the line-haul movement does not exist and the collection and distribution operations are close to each other, the Dial-A-Ride concept would provide a feasible public transportation alternative.

From Figure 3-2 it is also shown that other public transportation modes such as the fixed-route bus system and the taxi could provide a competitive alternative for the demand-responsive bus system in the same market areas. A brief discussion of the characteristics of each of the three modes is presented to outline the differences in their transportation role. Figure 3-3 shows the transportation patterns and the travel desire patterns of the three modes (23).

The three factors that determine the best operative mode are the demand level, the area size, and the level of service demanded by the customers. Taxi, as mentioned before, provides the best level of service to the customers, and the demand-responsive bus system provides a better service than the fixed-route bus system. This is irrespective of the demand level and the size of the service areas. At high demand level and large area size, the taxi would operate at a lower efficiency than the fixed-route bus system. It would have to make a lot of B to C type trips as shown in Figure 3-3, in which the taxi would be empty for a sizeable portion of the operating

a. <u>Dial-A-Ride Route</u> and <u>Passenger Desire Lines</u>
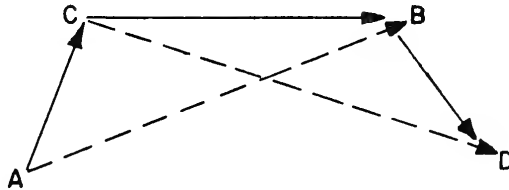
b. <u>Conventional Bus Route</u> and <u>Passenger Desire Lines</u>
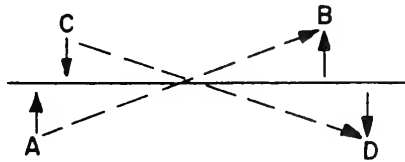
c. <u>Taxi Route</u> and <u>Passenger Desire Lines</u>
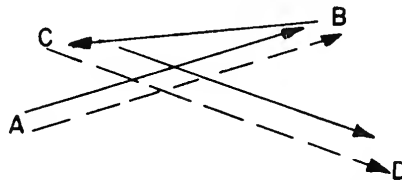
FIGURE 3-3   TRANSPORTATION   PATTERNS   AND
              TRAVEL DESIRE PATTERNS (FROM   REF. 23, P. 1-2)

time. Thus, it would produce a low vehicle productivity
compared to the fixed-route bus system. Similarly, the
demand-responsive bus system, under these conditions,
would have to make a long circuitous route A-B-C-D etc.,
which would limit its ability to pick up other customers
on the way in order to secure the service guarantees of
its boarding passengers. Therefore, the fixed-route bus
system best serves the high demand level and the large
area size. The taxi, however, best serves the low demand
level and the small area size. Their low vehicle
productivity best fits such kind of an operation and, due
to their less sophisticated control system, they might
produce lower costs than the demand-responsive bus system
and the fixed-route bus system. The demand-responsive bus
system best serves the medium demand level and area size.
This will be analyzed and studied in detail in Chapter 6.

Operational Planning

The two bus modes, the fixed-route and the demand-
responsive systems as discussed earlier provide a feasible
alternative for bus public transportation in small urban
areas. They best serve different demand levels and
different area size. However for a defined service area
the demand level for public transportation varies at
different times of the day. It increases sharply at
certain times, usually during the home-to-work and work-to-

home travel periods, and it decreases and levels off at
other periods. The proper application of each of the two
modes to best serve the various demand levels remains a
problem to the transit planners. No real analysis and
experimentation has been done to find out the proper
combination of the two modes. Most of the Dial-A-Ride
experiments have been done either in separate service
areas that do not include a fixed-route bus system or it
has been implemented to serve part of an area that is
already covered by a fixed-route bus system. This study
investigated the application of a fixed-route bus system
during the peak periods, and the (many-to-many) Dial-A-
Ride system during the off-peak periods in Greater
Lafayette Area. The number of buses required by each mode
to operate at a certain level of service was determined.
Consequently the cost analysis of the two systems determined
the feasibility of their operation. Emphasis was also
placed on the operational planning used to achieve this
analysis.

Operational planning of bus systems has received
little attention by transit planners. Little is found in
the literature on how to design the system after it has
been conceived. This study developed a methodology for
the design of fixed routes of bus systems in small urban
areas. Although each study area has its own characteristics
that would require special design elements, general design

procedures can be developed to apply to most small urban areas.

The planning process used to design the two bus systems is outlined in Figure 3-4.

The demographic and non-demographic characteristics of the study area were studied first. They play an important role in the design of the two bus systems. They constrain as well as shape the development of the two systems. The physical function determines the origins and the destinations of demand in space. The demand function was considered independent of the operative function and no attempt was made to explore the effect of different operating policies on demand level. A demand value was chosen out of all possible values of the demand set and various levels of service were investigated to meet that demand. The operative function was divided into three elements,operational objective, criteria and system design. The operational objectives outlined the operational policies of the system. The criteria provided the framework for the evaluation of the different system designs with respect to the operational objectives.

The cost function depends mainly on the operative function of the system although there are some cost elements which are independent, such as terminal land cost, facilities costs, management costs, etc. In this case, the cost function was considered as a by-product of
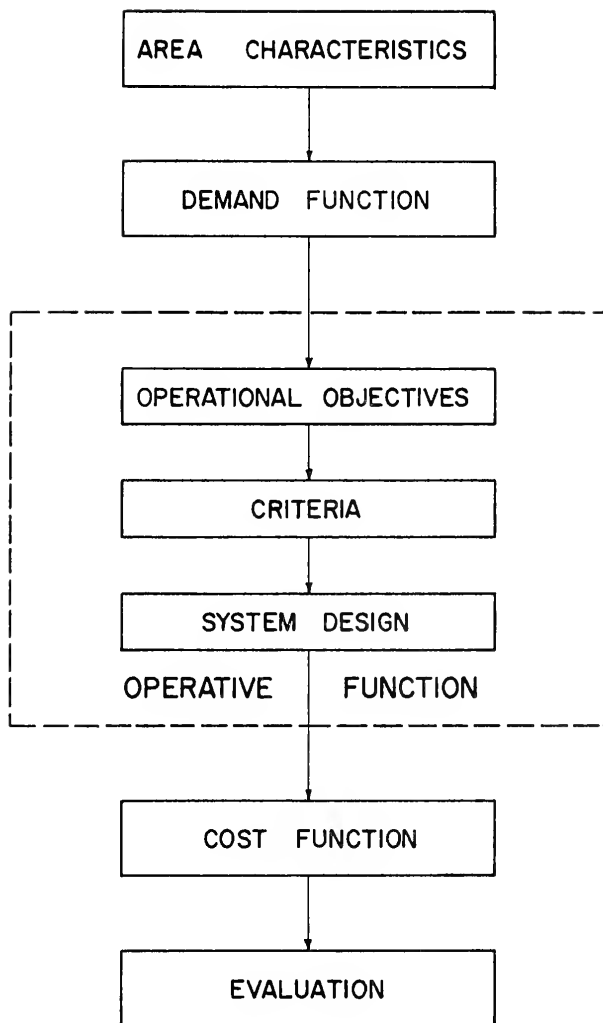
FIGURE 3-4 THE DESIGN PLANNING PROCESS

an operative function satisfying a certain demand and
not as the initial set which constrains the operative
function. The reason that this approach was adopted in
this research lies in the marketing analysis of public
transportation. The concept is to determine the costs
needed to provide a certain level of service rather than
to determine the level of service that could be provided
for a certain cost. This is because the consumer may not
use the product at the level of service offered, no matter
what the initial cost is. The last process included the
evaluation of the two bus systems. It determined the
best feasible operation of each mode.

CHAPTER 4:   AREA CHARACTERISTICS

This chapter presents the demographic and non demo-
graphic characteristics of the Greater Lafayette Area. The
data is obtained mainly from the Greater Lafayette Area
Transportation and Development Study. Available data in
the census Reports of 1970 has also been used.

Greater Lafayette Area

The Greater Lafayette Area is a small metropolis made
up of two core cities, Lafayette and West Lafayette.
Lafayette was first platted in 1826 and was incorporated
as a city in 1856. West Lafayette was organized in 1866
under the name of Chauncey and become the town of West
Lafayette in the late 1880's and was incorporated as a
city in 1924.

Lafayette and West Lafayette are located in the north-
west section of Indiana in approximately the geographical
centre of Tippecanoe County. The two cities are separated
by the Wabash River, and they are linked together by four
bridges.

The Greater Lafayette Area is located a third of the
way from Indianapolis to Chicago on Interstate 65. It is
served by three railroads, the Norfolk and Western, Penn-

Central, and the L & N. One of the railpax passenger routes makes stops in Lafayette; Chicago-Cincinnati; and Chicago-Miami. Two airlines, Allegheny, and Air Wisconsin serve the area from Purdue Airport.

The population of the Lafayette Standard Metropolitan Statistical Area (which includes all of Tippecanoe County) was 109,378 in 1970 and is projected to 150,000 by 1990 (9). It has been a rapidly growing area since 1940 as shown in Figure 4-1.

About 42,000 people are employed in the area. Eighteen and a half percent of them are employed in manufacturing industries. Fifty-three and a half percent are employed in white-collar occupations and 27.5 percent work with the government. The median income of the families in the SMSA is $10,120. The mean income is $11,048 and the mean income per family member is $3,273. The percentage of persons 25 years old and over who completed 4 years of high school or more is 67.7 percent.

The Greater Lafayette Area is becoming an important banking and financial centre. The assets of the full service banks amount to $235,000,000. It also provides good commercial activities and it has a good number of shopping centers.

Overall planning for the metropolitan area is under study. The Area Plan Commission is preparing a comprehensive land use, and transportation plan for the Greater Lafayette Area.
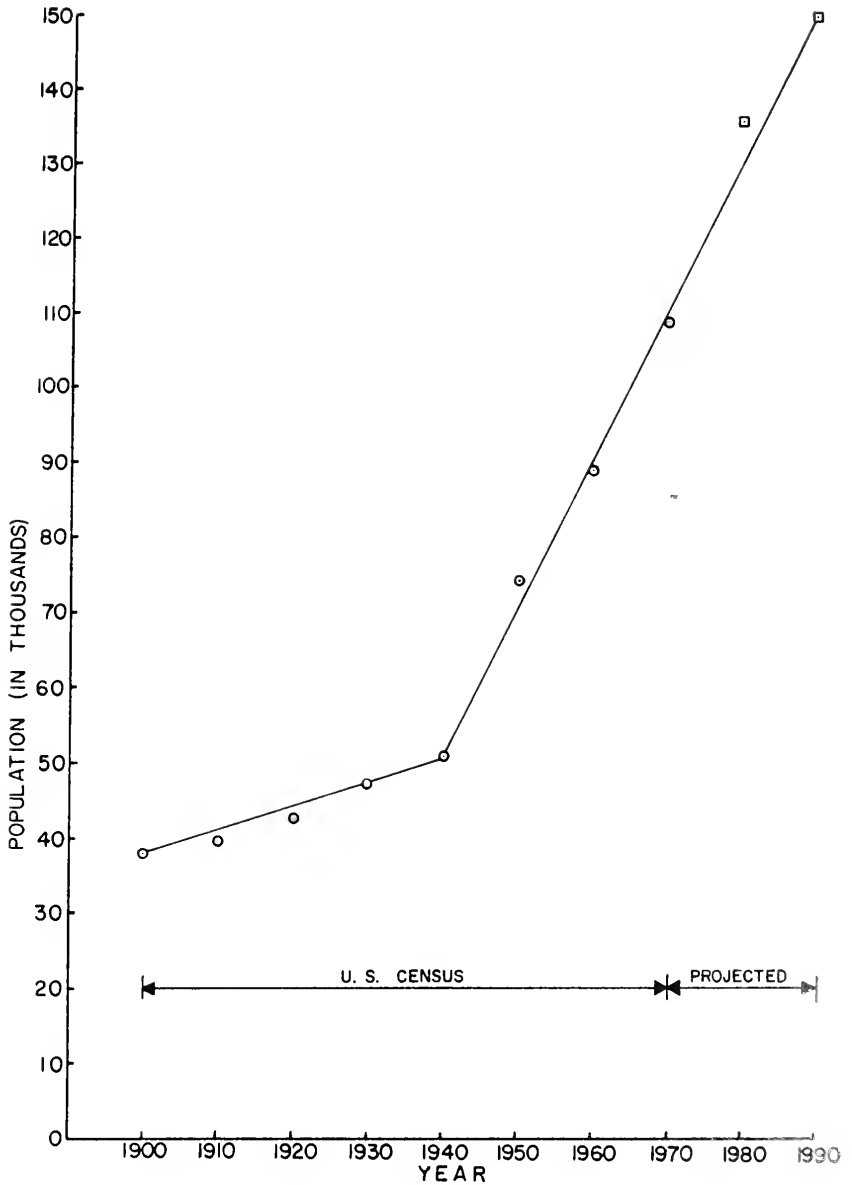
FIGURE 4-1   POPULATION GROWTH OF THE LAFAYETTE
STANDARD METROPOLITAN STATISTICAL
AREA (FROM REF. 9, P. 3)

Non-Demographic Characteristics

Analysis Zones

To be able to describe on an aggregated basis the demographic and non-demographic data of the study area a system of zones has to be established.

The zones used in this study are the traffic zones already established by the Greater Lafayette Area Transportation and Development Study. They were used because most of the collected data was furnished by the Transportation Study, and it was compiled on that level. In addition, census tracts of Lafayette and West Lafayette were used to display some data obtained from the census reports.

The traffic zones map is shown in Figure 4-2. Not all the traffic zones established by the Transportation Study were used since they cover an area much larger than the bus system could possibly cover with the short-range planning. However, the 92 traffic zones that were chosen cover the urbanized areas of Lafayette and West Lafayette and the surrounding area.

Existing Land Uses

An inventory of existing land uses is a prerequisite of any transportation study, because it gives the distribution of people and economic activities over the urban landscape. A knowledge of this distribution would

FIGURE 4-2 TRAFFIC ANALYSIS ZONES

help in determining the origins, the destinations and the linkages of travel. The land use data was obtained from the Greater Lafayette Area Transportation and Development Study.

The existing land use pattern within the Greater Lafayette Area is shown in Figure 4-3. It is divided into five generalized categories - residential, commercial, industrial, public buildings and schools, and golf courses, cemeteries, and parks playgrounds.

Single family residential development takes up the majority of residentially developed land in the communities. The direction of residential growth has been primarily to the north of West Lafayette and to the east and south of Lafayette.

The major concentration of high density residential development is located in West Lafayette, surrounding the Purdue University campus. Other locations of relatively high density residential development are apartments and townhouses along the Sagamore Parkway of West Lafayette.

The number of housing units in each traffic zone is shown in Figure 4-5. This number would reflect on the residential density within each zone compared to other zones.

Although the area's manufacturing base is small, it is diversified and is located in several areas, but mainly in the city of Lafayette. The main manufacturing area is
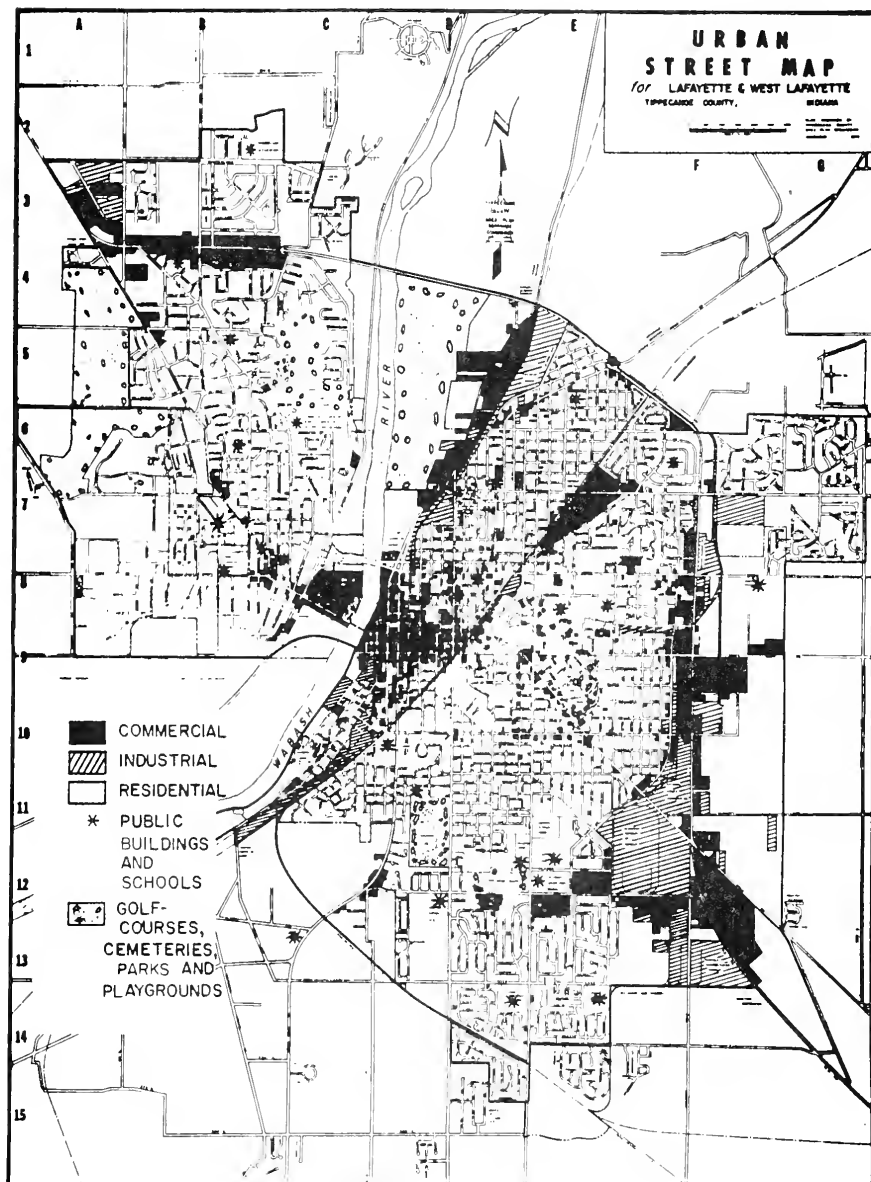
FIGURE 4-3 EXISTING LAND USES

located in the southeast of Lafayette near Sagamore Park-
way in the zone numbers 311, 312, 317 and 320. Major
industries such as Alcoa, National Homes, General Foods,
Fairfield Manufacturing, Berger Steel, and Anheuser-Busch
are located in this area. The other industrial areas are
located near the east bank of the Wabash River along the
canal road in the north and the Wabash Avenue in the
south. They include such industries as Duncan Electric,
Monon Shops, Ralston-Purina, Eli Lilly and some other
number of small industries.

The city of West Lafayette includes a number of small
industries, most of which are located in the Purdue
Industrial Park which is in the northwest part of the city.

There are five major retailing areas in the community
of Greater Lafayette Area. Three areas are in the city of
Lafayette and two areas are in the city of West Lafayette.
In Lafayette they consist of the Central Business District
in the downtown area, the commercial strip in the south
on Teal Road until it reaches Sagamore Parkway where
K-Mart, T-Way and the new shopping mall are located, and
the Market Square area in the northeast on Elmwood Avenue.

In the city of West Lafayette the two major commercial
strips occur on State Road in the south near Purdue
University and on Sagamore Parkway in the north.

Purdue University is located on the west side of the
community but it is not incorporated within the city limits

of West Lafayette. The University accounts for a major
part of the area use of services, a fact pointing to the
importance of the University in the economy of the area.

Agricultural land surrounds the community on all sides.
The land is flat or gently rolling and generally offers no
major problems for development.

Existing Street Network

A knowledge of the existing physical characteristics
of the street system is necessary in the evaluation and
determination of the possible fixed routes of the bus
system. No detailed investigation and analysis of the
street network is required since the main objectives of
this inventory is to find out the possible streets on
which the bus could run, rather than finding the
inefficiencies and the inadequacies of the system, which
is outside the scope of this study.

The major and minor arterials of the study area are
shown in Figure 4-4. The map was taken from the Greater
Lafayette Area Transportation and Development Study. The
streets were classified mainly on their functional and
traffic volume properties.

The existing system is a reasonably well defined grid
system, mainly in the city of Lafayette. The major
arterials are approximately one mile apart except in the
central areas where the spacing is much closer. Several
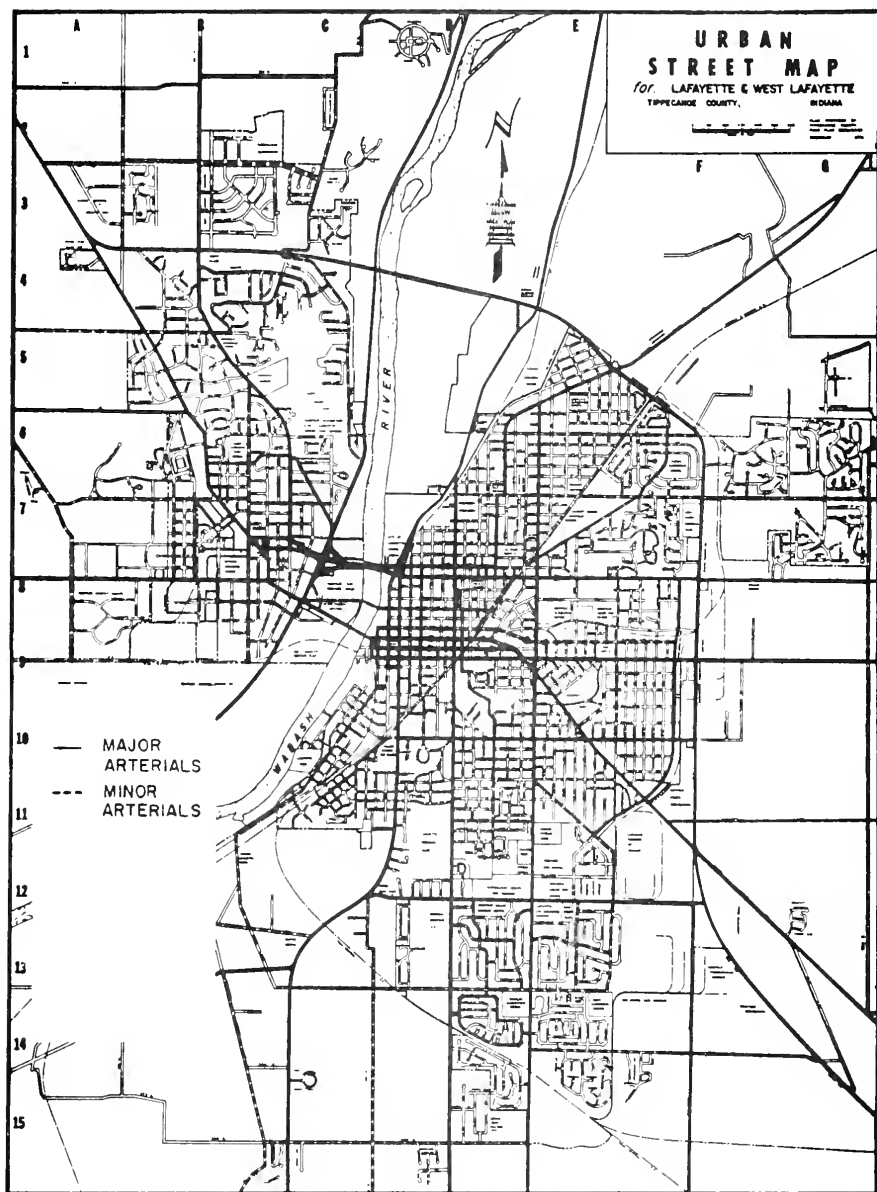
FIGURE 4-4 MAJOR AND MINOR ARTERIAL STREETS

major streets are continuous throughout the length and
width of the existing developed area. The major arterials
that connect the two cities are State Road 26, Northwestern
Avenue and Union Street over Harrison Bridge, and Sagamore
Parkway. In a north-south direction, in the city of
Lafayette, three major arterials are continuous, Canal
Road and State Road 43, 9th Street, and 18th Srteet. Other
major arterials are Main Street, Kossuth Street, and Teal
Road in Lafayette, and Salisbury and River Road in West
Lafayette. In the city of Lafayette, the railroad tracks
cross most of the major and minor arterials at grade.
Conflict of movement, therefore, occurs in different parts
of the city at different times of the day. It creates
delays and it might prevent the buses from meeting their
assigned schedules. This problem does not exist in the
city of West Lafayette, and major traffic delays are
absent except when a big activity is taking place on
Purdue Campus, such as football games on Saturday afternoons
during the fall semester, which occur 5 to 6 times a year.

In developing the fixed routes for the bus system
consideration was mainly given to major and minor arterials
as possible routes, except in some residential areas where
better service was justified and the width of the street
is large enough to accommodate the bus.

Demographic Characteristics

Population and Employment Distribution

The population and employment distribution describes the intensity of use of urban landscape. In addition, they give the locations of work and residency and the possible linkages of travel between the two places during the peak periods.

The population data was obtained from the 1970 Census Reports on the block level. It was separated and compiled on the zonal level by the author. The zones which lie outside the census tracts developed for the cities of West Lafayette and Lafayette have no population data at present.

The population distribution is shown in Figure 4-5. The map shows four numerical figures in each zone. The first figure gives the number of housing units in that zone. The second figure indicates the number of total population in that zone. The third figure gives the number of people below the age of 18, and the fourth figure gives the number of people 62 years old or more. The division of population into the two categories of young and old would help in defining that segment of the society, usually called captive riders, that might depend on public transportation for most of their travel.
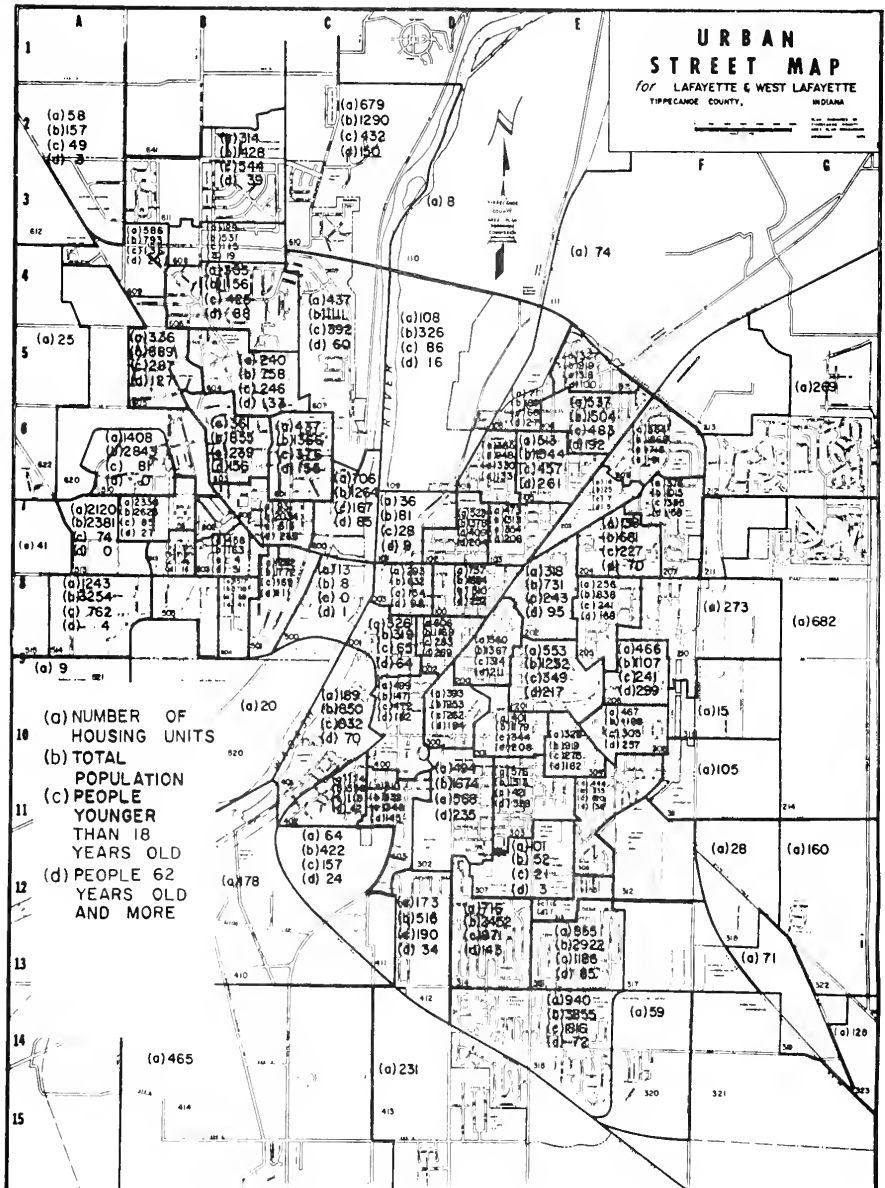
FIGURE 4-5 NUMBER OF HOUSING UNITS AND POPULATION DISTRIBUTION BY TRAFFIC ZONES

The information on employment distribution was
gathered from the land use inventory of Greater Lafayette
Area Transportation and Development Study. The major
sector of employment is in services, where Purdue
University forms the major part. The other sectors are
manufacturing, retail trade and transportation. The map
showing the employment distribution is Figure 4-6.

Car Ownership and Housing Unit Values

The car ownership distribution and the housing unit
values were collected as indicators of the economic
characteristics of the population in the study area. These
indicators may reflect on the low economic areas in the
community, where car ownership and housing values might be
low.

The car ownership data was gathered from the Census
Reports, which is aggregated on the census tracts level.
Each census tract contains the number of housing units,
and the number of households owning one car, two cars,
three cars or more, and none. The distribution of car
ownership per census tract is shown in Figure 4-7.

The map showing the housing unit values was obtained
from the Greater Lafayette Area Transportation and
Develpment Study. This is displayed in Figure 4-8.

There are areas of generally substandard housing in
the city of Lafayette. These areas coincide with areas of
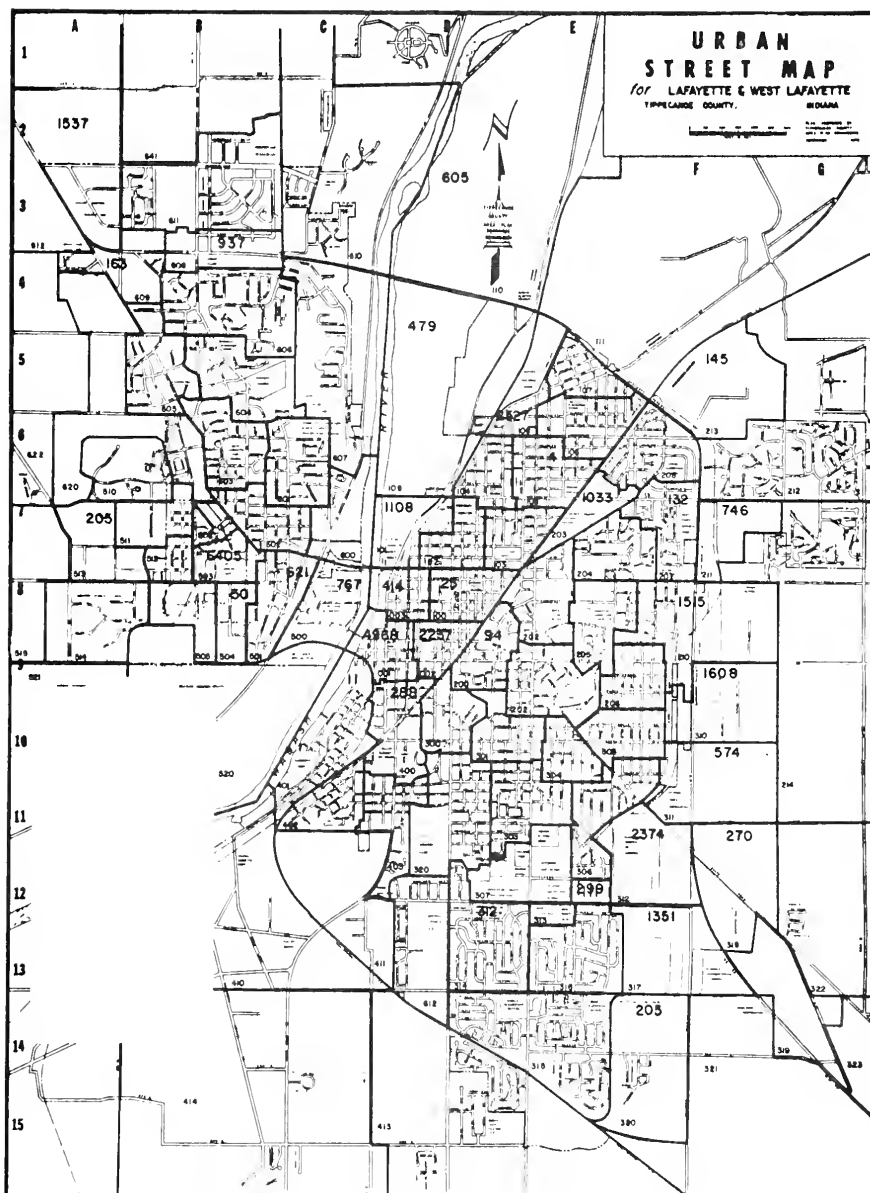
FIGURE 4-6   EMPLOYMENT DISTRIBUTION BY
TRAFFIC ZONES
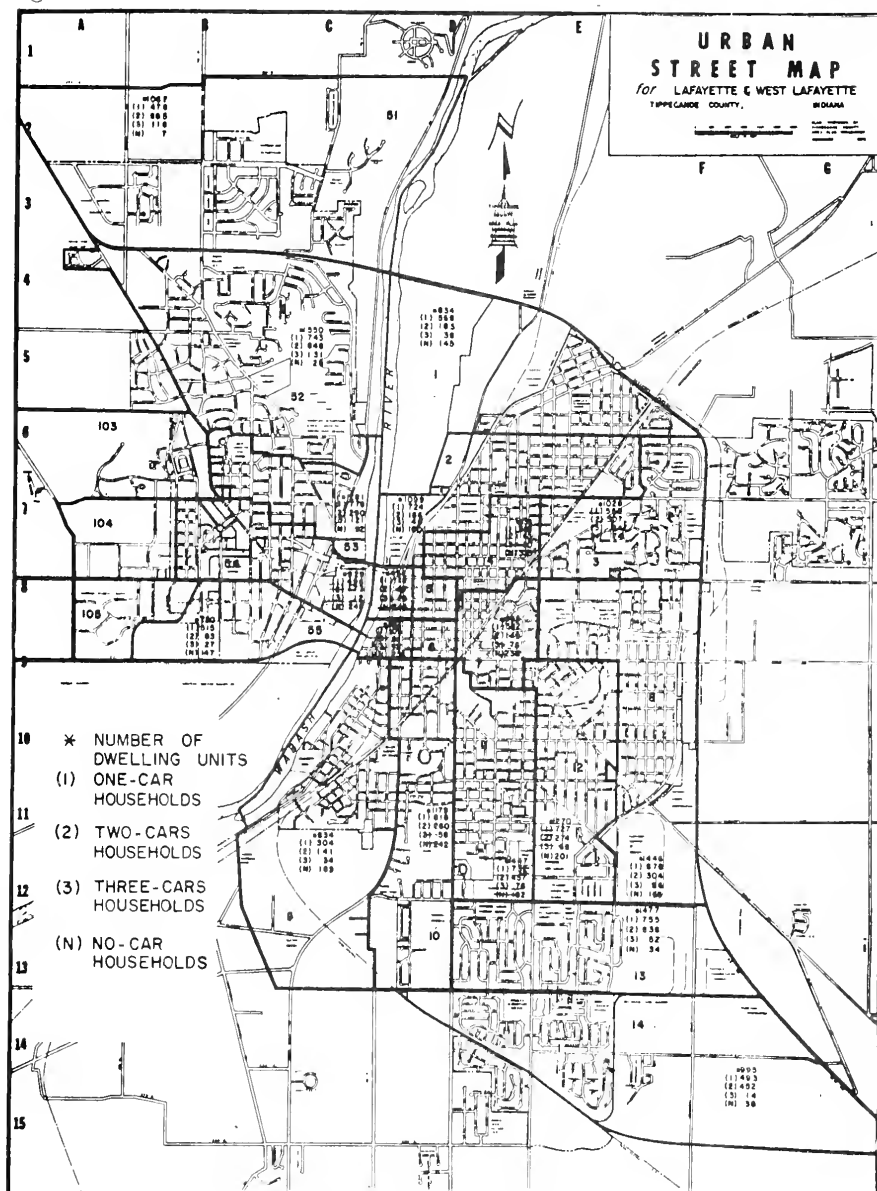
FIGURE 4-7   CAR OWNERSHIP BY CENSUS TRACTS
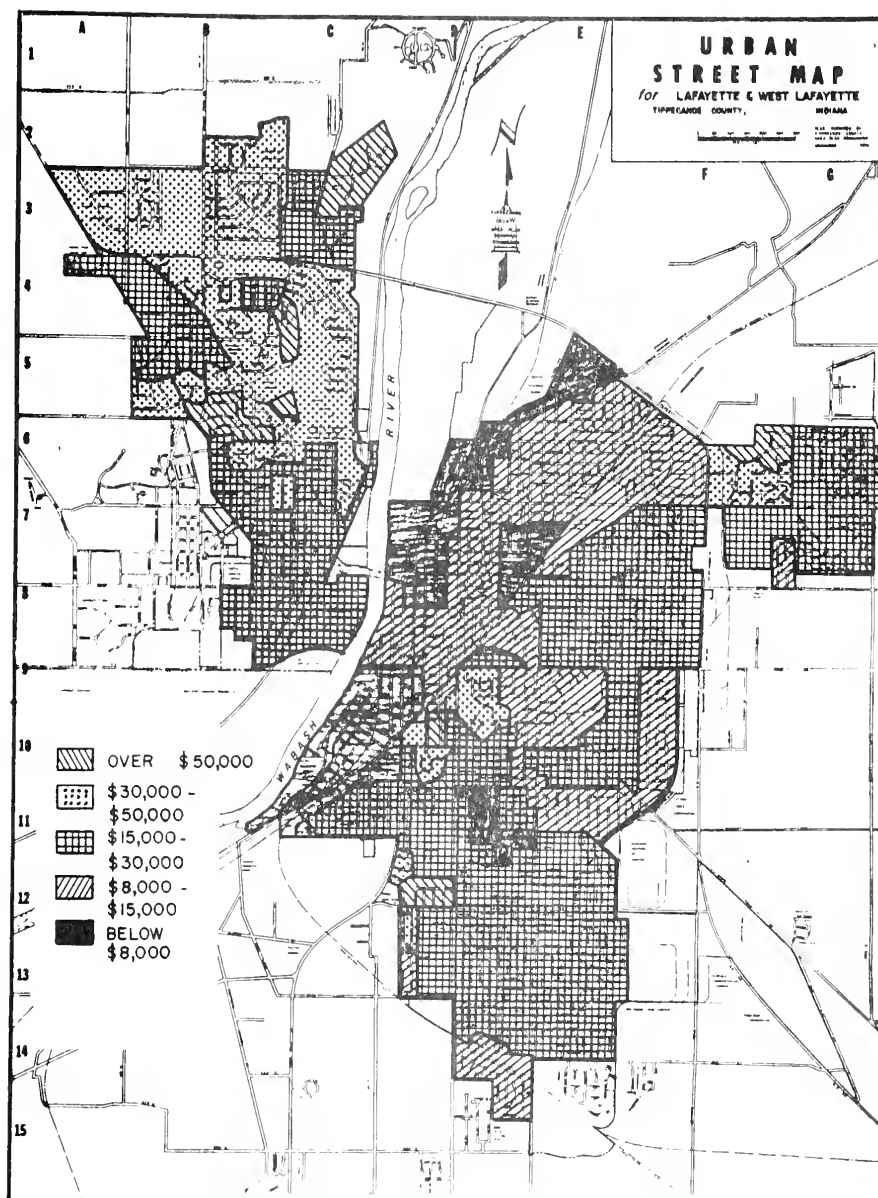
FIGURE 4-8 HOUSING UNIT VALUES

low car ownership. They are located near the east bank
of the Wabash River, along the Canal Road and Monon Avenue
in the north, and along the Wabash River in the south.
Another area that shows low economic characteristics is
the residential strip around St. Elizabeth's Hospital on
the west side of the railroad tracks.

The city of West Lafayette, in general, exhibits more
car ownership per dwelling unit and better housing values
than the city of Lafayette.

The houses belonging to Purdue University have not
been included in the appraisal developed by the
Transportation Study. The car ownership of people living
on the University grounds has also not been collected by
the Census Bureau, since they lie outside the census tracts
developed for the city of West Lafayette.

CHAPTER 5: THE FIXED ROUTE BUS SYSTEM

The purpose of this chapter is to develop the fixed-routes of the new bus system of Greater Lafayette Area. Analysis of the bus system prior to April 1973 is presented first to help identify the previous conditions.

Public Transportation Prior to April 1973

History

The history of public transportation in Greater Lafayette Area started in the year 1869, shortly after the Civil War. It consisted of a mule drawn railway type system and it only lasted for a few years.

A more extensive system was initiated in the year 1884. This system was composed of mule drawn street cars. It prospered in this form until August 1888, at which time the Sprig Company of Richmond, Virginia electrified the system. The electric street cars began by serving the central business district, then later extended the rails to serve Purdue University. Another route was initiated in June 1893 to serve the Soldier's Home through Happy Hollow, but it was later on abandoned due to maintenance problems. The average speed of the electric street cars

was about 15 m.p.h., but on the State Street hill the speed would drop to 5 m.p.h. The electric trolley was also used to tow coal cars to Soldier's Home from a Monon line spur connection near Battleground.

The first motorized bus started its operation on January 27, 1925. It was owned and operated by the state of Indiana to provide service from the trolley line on North River Road to Soldier's Home on the top of the hill, to replace the discontinuance of the street car line. This bus remained in service until 1941.

In March 1940, new 27 passenger buses were purchased to supplement the street cars, and two months later the buses took over the entire public transportation service. The last street car to operate was on the Salisbury-Monon Shops line and the date was May 11, 1940.

The bus system continued to operate under various owners until July 1970. At this time, the local government took the responsibility of operating the system.

The above discussion shows that public transportation played an important role in the development of Greater Lafayette Area. For over 100 years, there has been some form of public transportation available to the people of the area. As new technology and new concepts come into existence, they were incorporated in the public transportation system to provide a better service to the people in the community.

Old Bus Service

Routes: The route configuration of the Lafayette bus transit system in operation during the year 1972 was designed to provide direct access to the central business district (CBD), with four bus routes operating into the downtown area (see Figure 5-1). The four bus routes were joined together in the CBD so as to provide through service to opposite sections of the two cities. Three of the bus routes served the city of West Lafayette and Purdue Campus. It was possible to transfer between all routes. A common transfer point existed at the Courthouse in the downtown area.

Most routes operated on one-way loops at the out-of-downtown-part of the route. The policy of utilizing long one way loop created hardships for some passengers since they made circuitous, time-consuming trips to reach their destinations. This inconvenience discourages transit usage.

Schedules: Headway, the interval of time between buses on each route, and a measure of level of service, receives the most attention of transit users as well as by transit operators. The schedules provided a headway of one hour on two routes (South Street - Salisbury, Kossuth - Purdue) and thirty minutes on two routes (Monon Shops - University, Fairpark - Union). Because of the almost identical routes east of the CBD, for the Kossuth - Purdue, and the South - Salisbury, thirty minutes headways were provided in that area.
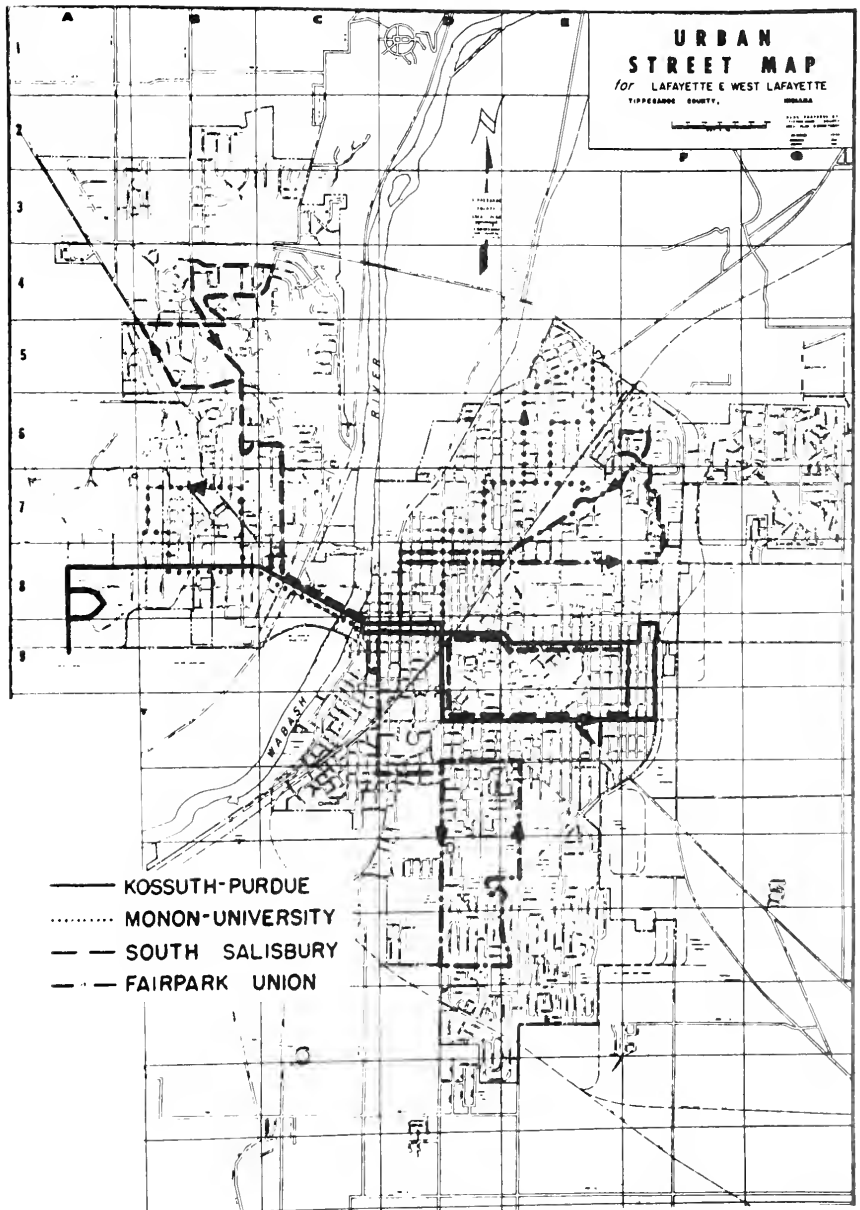
FIGURE 5-1 BUS ROUTES OF THE OLD SYSTEM

There was no service provided on Sundays and on holidays. In the evenings, due to relatively low volume of passengers being carried by the system, the service was discontinued at different times on different routes as shown in Table 5-1.

Coverage: One measure of the level of transit service available is the portion of the city within walking distance of a transit line. Figure 5-2 shows the area within approximately five minutes walking distance, i.e., one quarter of a mile from any bus line. The quarter mile standard is commonly used in the transit industry but is useful only in determining whether or not an area is served. Studies nationwide have indicated that relatively few transit users walk from areas beyond the quarter-mile limit.

The area coverage of each of the bus routes is described below:

Fairpark-Union was essentially a north-south route of the city of Lafayette. It served the Tecumseh Addition, Jefferson Square Shopping Center, and portions of the northeast Lafayette residential area. Two buses were used on this route, thereby providing half-hour headways.

Monon Shops-University served the northwest residential area of Lafayette, Market Square shopping centre, the downtown area and Purdue University. Two buses were used on this route also, thereby achieving half-hour headways.

TABLE 5-1 TIMETABLE OF THE OLD BUS ROUTES

SOUTH STREET - SALISBURY
Monday through Saturday Schedule

Lv Wabash Shores	Lv Salisbury & Robinson	Lv 3rd & Columbia	Lv 4th & Columbia	Lv Home Hospital	Lv 9th & Kossuth	Lv 9th & Kossuth	Lv 9th & Main	Lv 14th & Main	Lv North-Western & Lindbergh	Lv Wabash Shores
6 30	6 37	6 45	6 49	6 54	6 59	7 07	7 07	7 14	6 24	6 30
7 30	7 37	7 45	7 49	7 54	7 59	8 07	8 07	8 14	7 24	7 30
8 30	8 37	8 45	8 49	8 54	8 59	9 07	9 07	9 14	8 24	8 30
9 30	9 37	9 45	9 49	9 54	9 59	10 07	10 07	10 14	10 24	9 30
10 30	10 37	10 45	10 49	10 54	10 59	11 07	11 07	11 14	11 24	10 30
11 30	11 37	11 45	11 49	11 54	11 59	12 07	12 11	12 14	12 24	11 30
12 30	12 37	12 45	12 49	12 54	12 59	1 07	1 11	1 14	1 24	12 30
1 30	1 37	1 45	1 49	1 54	1 59	2 07	2 11	2 14	2 24	1 30
2 30	2 37	2 45	2 49	2 54	2 59	3 07	3 11	3 14	3 24	2 30
3 30	3 37	3 45	3 49	3 54	3 59	4 07	4 11	4 14	4 24	3 30
4 30	4 37	4 45	4 49	4 54	4 59	5 07	5 11	5 14	5 24	4 30
5 30	5 37	5 45	5 49	5 54	5 59	6 07	6 10	5 13	Gar 6 15 PM	5 30

KOSSUTH - PURDUE AIRPORT
Monday through Saturday Schedule

Lv Purdue Airport	Lv 3rd & Columbia	Lv 4th & Columbia	Lv 9th & Kossuth	Lv Earl Avenue	Lv Home Hospital	Lv 9th & Main	Lv 14th & Main	Lv Purdue Airport
6 15	6 23	6 29	6 35	7 41	6 45			

FAIRPARK—UNION
Weekday and Saturday Schedule

Lv 9th & Beck Lane	Lv 4th & Owen	Lv 4th & Columbia	Lv Elmwood & Underwood	Lv 6th & Main	Lv 4th & Owen	Lv 9th & Beck Lane
		5 47	6 00	5 54		5 57
5 57	●	6 15	6 30	6 15	6 21	6 27
6 27	6 07	6 45	7 00	6 45	6 51	6 57
6 57	6 37	7 15	7 30	7 15	7 21	7 27
7 27	7 07	7 45	8 00	7 45	7 51	7 57
7 57	7 37	8 15	8 30	8 15	8 21	8 27
8 27	8 07	8 45	9 00	8 45	8 51	8 57
8 57	8 37	9 15	9 30	9 15	9 21	9 27
9 27	9 07	9 45	10 00	9 45	9 51	9 57
9 57	9 37	10 15	10 30	10 15	10 21	10 27
10 27	10 07	10 45	11 00	10 45	10 51	10 57
10 57	10 37	11 15	11 30	11 15	11 21	11 27
11 27	11 07	11 45	11 30	11 45	11 51	11 57
11 57	11 37	12 15	12 00	12 15	12 21	12 27
12 27	12 07	12 45	12 30	12 45	12 51	12 57
12 57	12 37	1 15	1 00	1 15	1 21	1 27
1 27	1 07	1 45	1 30	1 45	1 51	1 57
1 57	1 37	2 15	2 00	2 15	2 21	2 27
2 27	2 07	2 45	2 30	2 45	2 51	2 57
2 57	2 37	3 15	3 00	3 15	3 21	3 27
3 27	3 07	3 45	3 30	3 45	3 51	3 57
3 57	3 37	4 15	4 00	4 15	4 21	4 27
4 27	4 07	4 45	4 30	4 45	4 51	4 57
4 57	4 37	5 15	5 00	5 15	5 21	5 27
5 27	5 07	5 45	6 00	5 45	5 51	5 57
5 57	6 07	6 13		6 14	●	

MONON SHOPS—UNIVERSITY
Monday through Saturday Schedule

Lv Market Square	Lv 14th & Hartford	Lv 9th & Main	Lv 4th & Main	Lv Stadium & University	Lv 3rd & Columbia	Lv 9th & Main	Lv 14th & Hartford	Lv 24th & Schuyler	Lv Market Square
	5 41	5 45	5 57	6 09	6 13	6 17	6 29	5 55	6 02
6 02	6 07	6 11	6 15	6 27	6 39	6 43	6 47	6 55	6 32
6 32	6 37	6 41	6 45	6 57	7 09	7 13	7 17	7 25	7 32
7 02	7 07	7 11	7 15	7 27	7 39	7 43	7 47	7 55	8 02
7 32	7 37	7 41	7 45	7 57	8 09	8 13	8 17	8 25	8 32
8 02	8 07	8 11	8 15	8 27	8 39	8 43	8 47	8 55	9 02
8 32	8 37	8 41	8 45	8 57	9 09	9 13	9 17	9 25	9 32
9 02	9 07	9 11	9 15	9 27	9 39	9 43	9 47	9 55	10 02
9 32	9 37	9 41	9 45	9 57	10 09	10 13	10 17	10 25	10 32
10 02	10 07	10 11	10 15	10 27	10 39	10 43	10 47	10 55	11 02
10 32	10 37	10 41	10 45	10 57	11 09	11 13	11 17	11 25	11 32
11 02	11 07	11 11	11 15	11 27	11 39	11 43	11 47	11 55	12 02
11 32	11 37	11 41	11 45	11 57	12 09	12 13	12 17	12 25	12 32
12 02	12 07	12 11	12 15	12 27	12 39	12 43	12 47	12 55	1 02
12 32	12 37	12 41	12 45	12 57	1 09	1 13	1 17	1 25	1 32
1 02	1 07	1 11	1 15	1 27	1 39	1 43	1 47	1 55	2 02
1 32	1 37	1 41	1 45	1 57	2 09	2 13	2 17	2 25	2 32
2 02	2 07	2 11	2 15	2 27	2 39	2 43	2 47	2 55	3 02
2 32	2 37	2 41	2 45	2 57	3 09	3 13	3 17	3 25	3 32
3 02	3 07	3 11	3 15	3 27	3 39	3 43	3 47	3 55	4 02
3 32	3 37	3 41	3 45	3 57	4 09	4 13	4 17	4 25	4 32
4 02	4 07	4 11	4 15	4 27	4 39	4 43	4 47	4 55	5 02
4 32	4 37	4 41	4 45	4 57	5 09	5 13	5 17	5 25	5 32
5 02	5 07	5 11	5 15	5 27	5 39	5 43	5 47	5 55	6 02
5 32	5 37	5 41	5 45	5 57	6 09	6 13	6 17	6 25	6 32
6 02	6 07	6 11	6 15	6 27	6 39	6 43	6 47	6 55	7 02
6 32	6 37	6 41	6 45	6 57	7 09	7 13	7 17	7 25	7 32
7 02	7 07	7 11	7 15	7 27	7 39	7 43	7 47	7 55	8 02
7 32	7 37	7 41	7 45	7 57	8 09	8 13	8 17	8 25	8 32
8 02	8 07	8 11	8 15	8 27	8 39				

NO SUNDAY OR HOLIDAY SERVICE

AM Light Face.   PM Bold Face.

FIGURE 5-2   ROUTE COVERAGE OF THE OLD BUS SYSTEM
(1/4 MILE ON EACH SIDE OF ROUTE)

South Street-Salisbury served Wabash Village and the
residential areas of West Lafayette, the downtown area of
Lafayette, South Street including Home Hospital, 29th
Street, and Kossuth Street. One bus was used, giving a
one-hour headway.

Kossuth-Purdue Airport corresponded closely to the
South Street-Salisbury route in Lafayette; it also served
the Purdue Campus and the Purdue Airport. One bus was
used on this route also, giving a one-hour headway.

Figure 5-2 indicates that most of the developed
area in Lafayette was covered by some transit service.
However, it also shows that there are some new developments
which are out of reach of the old bus service. These
developments or sections include the area north of Sagamore
Parkway in West Lafayette, the area east of Sagamore
Parkway in Lafayette along Greenbush and Union Streets, the
Lafayette Square Shopping Center at Teal Road, and the
shopping plaza composed of K-Mart, T-Way and the new mall
at the intersection of Teal Road and Sagamore Pakway. The
area southeast of Beck Lane and the area northwest of
Teal Road along State Road 43 were also deprived of bus
service.

Equipment: The bus sytem was composed of some 23 buses.
Their seating capacity was in the order of 33 passengers
and larger. The seating capacity of the buses was
considered to be more than adequate for the passenger load

and was rarely exceeded. The average age of the buses approached 20 years. The condition of the equipment was such that none of it can be retained for future use. Also, there is no salvage value for the bus equipment as the buses are out-dated and in a very poor condition.

Characteristics of Transit Riders

A number of characteristics of the bus users were obtained from the on board survey conducted on Thursday, November 19, 1970. The form used in the survey was designed to gather trip related data including origin, destination, and purpose as well as characteristics of the bus rider such as age, sex, education, drivers license and car ownership status.

Figure 5-3 shows the relationships between the various categories of sex, age, trip purpose, driver's license availability and car ownership of the users of transit.

Work trips accounted for almost half of the total trips followed by school trips making up approximately one fifth. Over 40% of the passengers were 45 years of age or older, while almost 30% were under the age of 20. The females constituted the great majority of bus passengers (73.5%).

A review of the characteristics reveal that there is a substantial group that is dependent on the bus system to
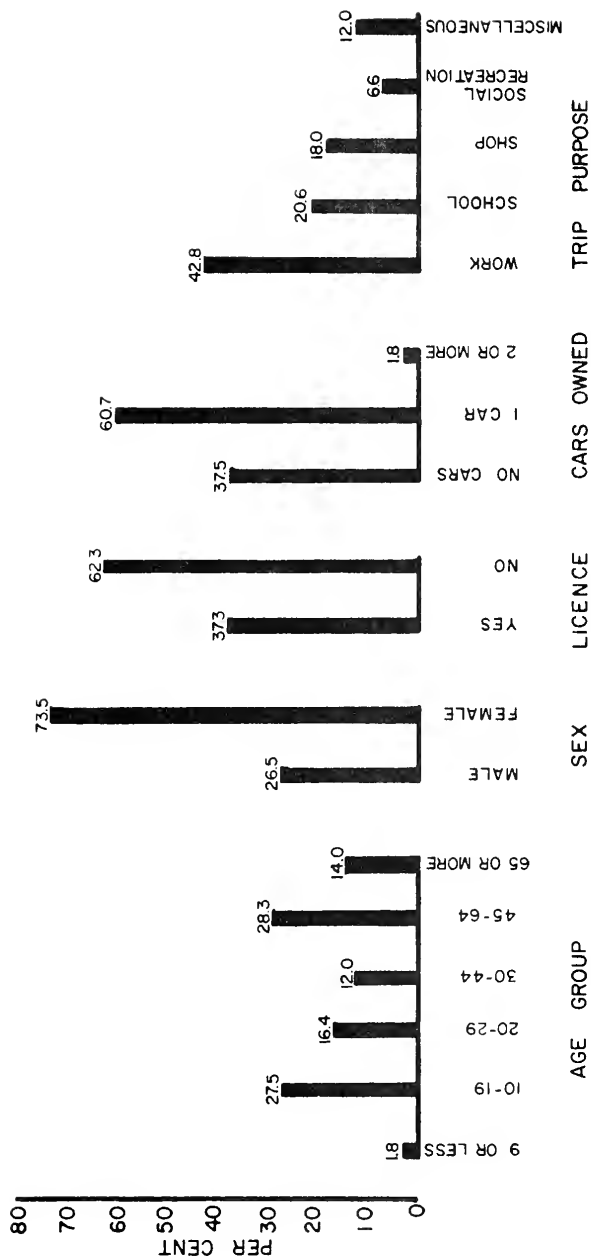
FIGURE 5-3   CHARACTERISTICS   OF   TRANSIT   RIDERS

achieve their travel needs. One third of the transit riders reported no car ownership. The over 65 and under 20 age groups composed more than 40% of the total transit riders. The two areas of age and auto ownership give some indication as to the amount of captive ridership on the system. This group of captive riders is a majority of the total bus riders.

Another major group of riders is the wife who is using the bus as a "second car" for shopping or for a vital work trip function which is indicated by the large number of women riders combined with the predominance of one-car household.

These two groups, the captive riders and the house-wives, possibly constitute the major demand on the bus system.

Travel Data

The hourly volume variation by time of day is shown in Figure 5-4. As most of the public transportation systems, the distribution shows two peaks, one in the morning and one in the afternoon. The highest peak occurred in the afternoon around 5:00 p.m. This is clearly the effect of the work to home trips which start at that time.
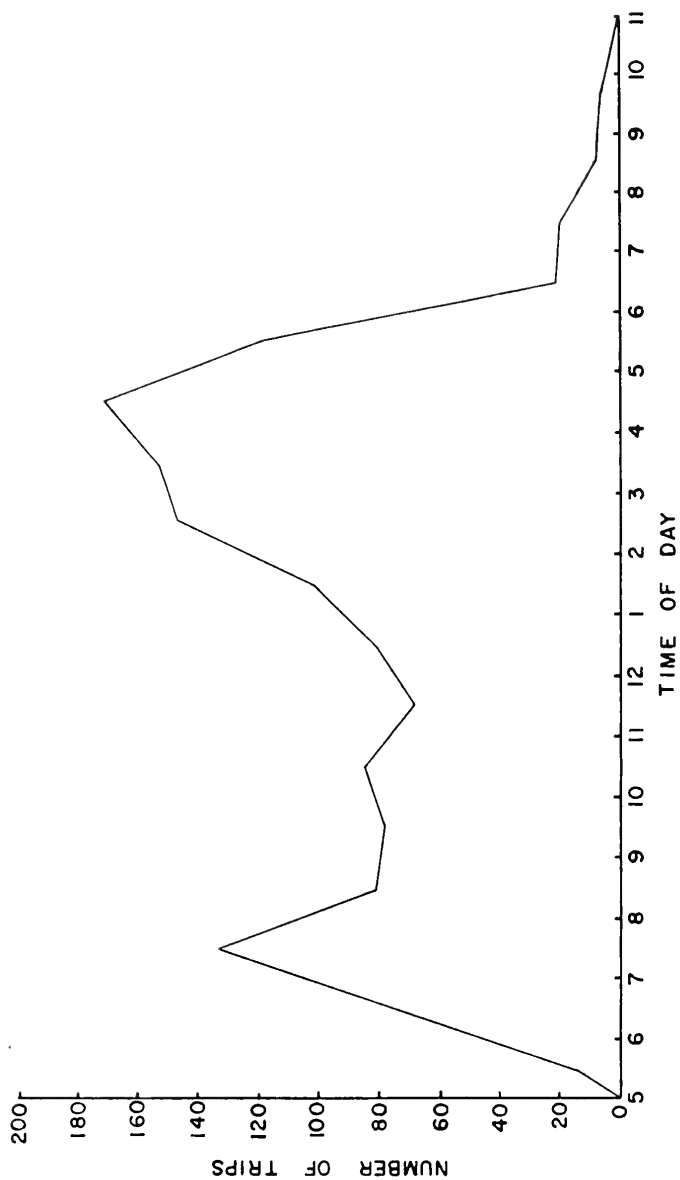
FIGURE 5-4   HOURLY TRANSIT TRIP DISTRIBUTION (FROM REF. 9, P. 32)

A tabulation of the peak time percentage distribution of total bus transit trips is shown below:

Fairpark-Union	South Street-Salisbury
(6:30-8:00 a.m.) 15%	(6:30-7:30 a.m.) 11%
(2:30-5:30 p.m.) 46%	(3:30-5:00 p.m.) 21%
(4-1/2 of 12 hrs.) Total 61%	(2-1/2 of 12 hrs.) 32%

Kossuth-Purdue Airport	Monon Shops-University
(6:00-8:00 a.m.) 15%	(6:30-8:00 a.m.) 11%
(3:00-5:00 p.m.) 35%	(3:30-5:30 p.m.) 24%
(4-1/2 of 14 hrs.) Total 50%	(3-1/2 of 18 hrs.) 35%

The figures indicate that the majority of the trips were made during the morning and afternoon peak periods. The Fairpark Union line had 61% of the trips occurring in 4-1/2 hours of a 12 hour operation. Likewise, the Kossuth-Purdue Airport line handled 50% of total trips during the peak periods.

An examination of the distribution of bus passenger trips, based on trips ending in a given traffic zone, indicated that the following eight areas are major trip generators:

Traffic Zone No.	Location	No. of Trip Ends
001	Downtown (West of City Hall)	185
002	Downtown (East of City Hall)	120
503	Purdue (Near Union Building)	92
203	Market Square	67
100	Immediately NE of Central Business District (9th and Cincinnati)	48
314	Jefferson Square	44
304	Earl and Kossuth	33
403	4th and Owen	32

Economic Condition

The economic condition of the bus system fluctuated between good and bad years. However, the last four years have produced a continued decline in revenue and services. With the decline in revenue and services, the cost of providing these services has continued to increase, thus reducing any profit the company might make.

Figure 5-5 shows the net taxable income of the bus company. It is calculated by subtracting the total operating costs from the total revenues. The total cost of operation does not include the cost of general office expenses, tax deductions, bus depreciation, or compensation paid to the officers of the corporation in Indianapolis. Still, the graph does present a fair picture of the good and bad economic periods of operation. The graph shows three relatively good periods of operation in 1959, 1962 and 1967 and two relatively low periods in 1961 and 1963.
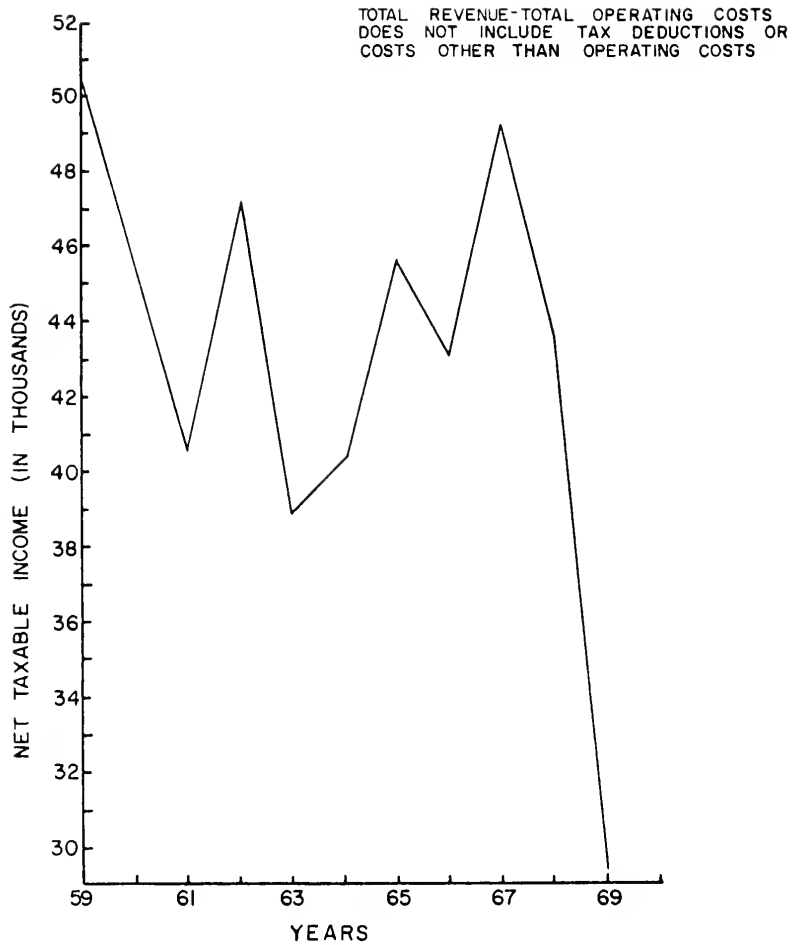
FIGURE 5-5   NET TAXABLE INCOME – GREATER
                     LAFAYETTE BUS COMPANY (FROM REF. 9, P.37)

The 1967 year was probably the best year of operation for the company. Besides the increase in the operating costs, the total revenue was the highest since 1960. This increase was attributed to the increase in passenger revenue as well as to the increase in the special and charter revenue.

Since 1967, the operating costs have continued to rise while the passenger revenue and total revenue have continued to decline which brought the bus company to the deficit situation.

Conclusions Regarding the Old Bus Service

The analysis of the old bus service indicates short-comings in four general areas, routing, headways, hours of operation and quality of service variables.

The routing patterns offered no service to new growth areas of the city, residential or commercial. Loop type route patterns were used to gain wider coverage, doubling ride times and lowering the level of service.

The frequency of service in certain areas amounted to one hour headway. It generally produced long waiting times and inconvenience to the bus riders.

The hours of operation did not provide evening service on most routes. Besides, there was no bus service on Sundays or holidays. The transit patrons found it very difficult to rely or depend on the transit services to meet all their travel needs.

In general, the quality of service was poor. The old buses were unable to maintain schedules, even on short routes. The ride was uncomfortable due to exhaust fumes, rough ride and lack of air-conditioning and flow-through heat. Bus drivers received little training or incentive to build a better public image.

Development of the New Fixed Route Bus System

Objectives

The main objective of the new fixed route bus system is to provide a better bus service to the community of Greater Lafayette Area. A better bus service means the best selection of routes, shorter headways, larger coverage area and a more convenient ride. These improvement policies are limited by practical financial considerations. In other words, they are limited by the number of buses available for service.

Therefore, the best fixed route bus network is the one that achieves a proper balance between area coverage and rider convenience and economics of operation subject to the constraint of physical assets.

Guidelines for Route Development

Although bus routes should be conceived on a system wide basis, the following guidelines were developed to be used as an evaluating criteria for individual route development in small urban areas.

1. Transit route- should be linear where possible,
   returning inbound over the same route used out-
   bound. It provides directness of travel to the
   rider between his points of origin and destination
   and decreases his bus stravel time.

2. Through-routing is preferred to cycle-routing.
   Through-routing is simply routing the vehicles
   from one side of town to the other generally
   through the central business district. Cycle-
   routing is running the buses into the central
   business district and routing them back out over
   the same line, usually at fixed interval. Both
   of these plans allow arrivals at the central
   business district to be scheduled for convenient
   transfers to other lines. Through-routing will
   minimize the number of passengers who must
   transfer at the central business district to
   complete their trips. On the other hand, if a
   service interruption occurs, two lines are
   affected rather than one. Cycle-routing simplifies
   scheduling somewhat, but it forces more passengers
   to transfer from one line to another. If through
   traffic is heavy, through-routing is preferable
   because it minimizes time, energy and money
   costs (22).

3. Closer space routing or fine-grained routing
    through residential areas at the outlying end of
    a line is recommended. This technique can be
    rega rded almost as door-to-door service. It
    increases the access to the transit service by
    minimizing the walking time of the consumer.

4. Loop-routing should be avoided where possible.
    The use of large one-way loops of transit lines
    is generally not good practice. Large loops
    have the effect of causing people to wait through
    layovers, sometimes fairly time-consuming, before
    reaching their final destination. They also
    preclude the extension of lines at some future
    time into areas of new development.

5. Routes should not be duplicated, except where
    they converge to assure maximum service area
    penetration by each route. It is desirable that
    a bus operating on one route not duplicate the
    area served by a bus on another route.

6. Routes should attempt to touch as many traffic
    generators as possible without becoming too
    circuitous (22).

7. Routes should, if possible, attempt to have
    traffic generators at both ends of the line. This
    tends to generate passenger movements on both
    directions of the route at various times of the
    service.

8. Buses should, if possible, enter a shopping
    center, apartment complex, recreation area, or
    factory complex (22).

9. At a major downtown terminus, the buses should
    pull up next to one another to expedite trans-
    ferring (22).

10. The number of transfers between various lines
    which a transit rider must take between his point
    of origin and destination must be minimized. It
    eliminates unnecessary waiting times, especially
    if service interruption occurs one one of the
    routes. It also decreases the possibilities of
    misusing the transfer tickets by the patrons.

11. Bus routes should be limited to arterial streets,
    except in residential areas where the use of
    feeder routes connected with arterial routes can
    be justified.

12. Each route should have as few turns as possible,
    and have adequate provision for turn around at
    both ends, and for layover where necessary.

13. Very long complex routes should be avoided where
    possible. Very long bus routes, particularly if
    they have several branches are hard to operate at
    a satisfactory level of schedule adherence. From
    the operating point of view, it is deemed desirable
    to keep routes as short as possible and to limit

the branches on longer routes. This criteria is, of course, in conflict with the aim of providing the maximum number of through rides for passengers, and in many instances, compromise is necessary.

14. Individual bus routes should be kept as simple as possible and easy to understand by a person traveling for the first time. In addition, the entire route structure should be simple so as to minimize confusion and make it possible for a person to easily choose the best route for his destination.

15. The system of routes should be reasongly flexible over the long-term so that they may meet changing conditions in the future.

Fixed-Route Selection Procedures

The procedures used in developing the different route configurations for Greater Lafayette Area are outlined below. They are generalized for use as route development procedures for small urban areas.

1. The initial point for all routing configurations starts with a street map of the total area to be served. On this map all streets suitable for transit routes (i.e., adequate widths, running speed, turning radii, and abutting land use), should be identified. In most small urban areas

these streets fall into the categories of major
and minor arterials, and such streets should
make prime candidates for bus routes.
The traffic signals on these streets are most
often coordinated in such a way that traffic
maintaining the proper speed can make the entire
trip without having to stop for traffic signals.
Parking is usually forbidden on these streets,
which decreases the time required to load and
unload at bus stops. Besides, the private auto-
mobile drivers generally select routes that
minimize travel time and these routes should be
considered as bus routes.

2. After all the possible candidate routes have been
chosen, the second point is to locate the major
traffic generators on the map. The major traffic
generators common to all small urban areas are:

a) Shopping centers

b) Industrial areas

c) Commercial areas

d) High density housing

e) Low income housing

f) Health care facilities

g) Schools and Universities

h) Airports and bus terminals

i) Recreation areas

These are the points where people may come and go. Obviously, the route layout should serve these points or terminals.

3. To expedite transferring between bus lines a common point of transfer should be chosen, where bus routes could converge. Since most of the arterial streets in small urban areas tend to converge in the downtown area, and because the majority of the desired lines of travel are oriented towards downtown, the choice of the downtown area as a common transfer point should be recommended. In addition, the common point could be used as a check point to control the operation of the buses.

4. Iso-lines of running times from the common transfer point towards the outlying points of the study area are drawn next on the map. Ten minutes interval of iso-lines may be used. The travel times could be established either by referring to the timetables of the existing bus system or by actual testing in the field. These lines would indicate the time needed by the bus to reach the end of the different legs of the candidate routes from the common points.

5. A decision should be made on whether any link of the study area connected to the central business district should be given a preferential treatment in service to other parts of the study area. A special service is recommended in high-density corridors of travel linking two major activity centers. But, in most small urban areas the density of travel is uniform among all parts of the city and no preferential treatment is usually warranted.

6. At this stage, with the number of buses available for service in mind, and the range of headway chosen on the basis of the service area, the number of route legs from the transfer point could be determined. However, the number of routes and the frequency of service are interrelated. Within a fixed service area and a fixed number of buses, headways can be reduced by placing lines farther apart and minimizing the number of routes. On the other hand, walking distances can be reduced by placing lines closer together and increasing the headways. If the size of the service area is increased, the headways increase for the same number of routes and a fixed number of buses. An increase in the number of operating buses would reduce the headways if the route lines are

spaced the same. A decrease in the number of routes would also reduce the headways for a greater size area. So, routings must be necessarily a compromise when viewed from "walking distances" and "headway" aspects.

In the transit industry a quarter mile distance on both sides of the bus line is considered to be the maximum catchment area for that route. Thus, in residential areas, the spacing of routes one-half mile apart is considered to be the traditional rule of thumb. This rule of thumb, however, should be discarded in favor of routes that are closer together, especially if the transit firm is to attract automobile owners, for studies have shown that ridership falls off sharply beyond the first block.

Normally, the headways are better provided in even portions of an hour, i.e., at 15 minutes, 20 minutes or 30 minutes interval because the schedules are easier to remember.

Alternate System Concepts

In the Greater Lafayette Area, the major street system tends to converge in the downtown area at the Courthouse providing a good point for common transfers. There are only two practical river corssings that the buses can use in moving from the city of West Lafayette to the city of Lafayette and visa versa. These are the Main Street bridge

and the Harrison bridge. This physical constraint limits the choice of alternatives in route development. Another physical constraint is the railroad crossings in the city of Lafayette. These railroad crossings, at grade with the street network, create traffic delays when the trains cross the city. It may prevent the buses from meeting their assigned schedules. Since the city of West Lafayette has no railroad crossings and to facilitate the problem of scheduling and operation, it is felt that cycle-routing should be used instead of through-routing at this stage of development, until the railroad relocation plan has been executed.

Taking these problems into consideration, and following the guidelines for route development and the route selection procedures, the following system concepts have been developed.

Concept A - A fifteen bus, eleven leg system: The system shown in Figure 5-6 was developed using the concept of linear routing where possible. It is composed of eleven legs. The short route on Wabash Avenue is not considered as a separate leg, since it is a part of another longer route, the Market Square - Greenbush route. Two buses operate on each of the four long legs to provide the 30 minute headways on the entire system. The disadvantages of this concept are that the people living south of Teal Road have to make a large loop to go downtown, which might

URBAN STREET MAP
for LAFAYETTE & WEST LAFAYETTE
TIPPECANOE COUNTY, INDIANA
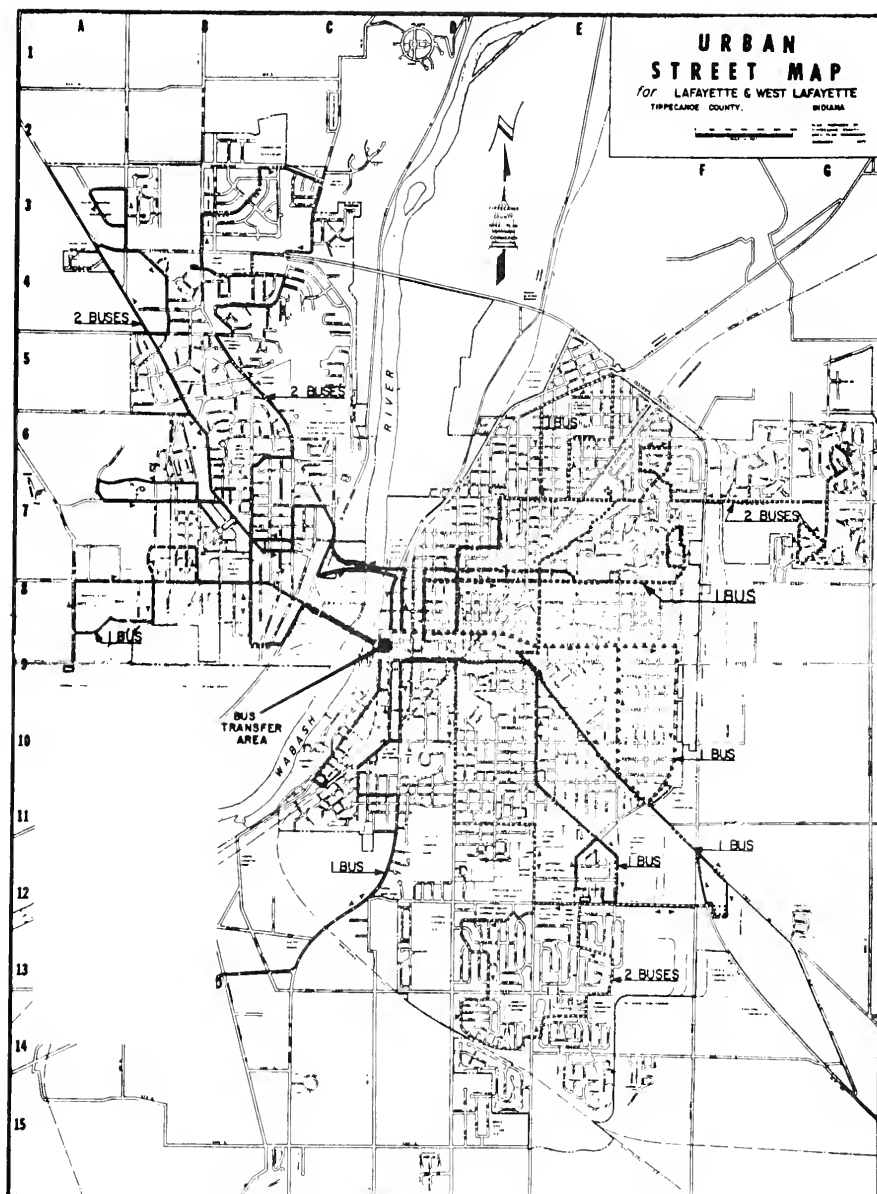
FIGURE 5-6   ROUTE   CONCEPT   A

take them twice the time of direct travel. The area
covered by the Union and Hedgewood Line has no direct
access to the Market Square Shopping Center, except through
transfer at Courthouse, which is a long way of travel.

The advantage of the system is that it provides a
good coverage of the service area. It also cuts down on
left-turning movements which tend to increase the operating
speeds.

Concept B - A fifteen bus, 9 leg, one two way loop system:
The concept B as shown in Figure 5-7 does not differ much
from Concept A. The headways and the service area are
much the same, except for the additional area south of
Brady Lane which is served by this concept. The West
Lafayette area has the same route patterns as in Concept A.

The disadvantage exhibited in the previous system on
Union Street and Hedgewood Drive is being eliminated in
this system. A two-way loop service is made out by
connecting the Market Square - Elmwood route and the
Hartford - Schuyler route. It eliminates the need for an
out-of-the-way trip downtown if travel is desired between
the adjacent areas. Furthermore when cut in frequency of
service is desired, such as during evening periods, the
route may be turned to a one-way loop service which re-
duces the number of buses in operation.

The obvious disadvantage in this system is that people
living southwest of Teal Road and 18th Street have no
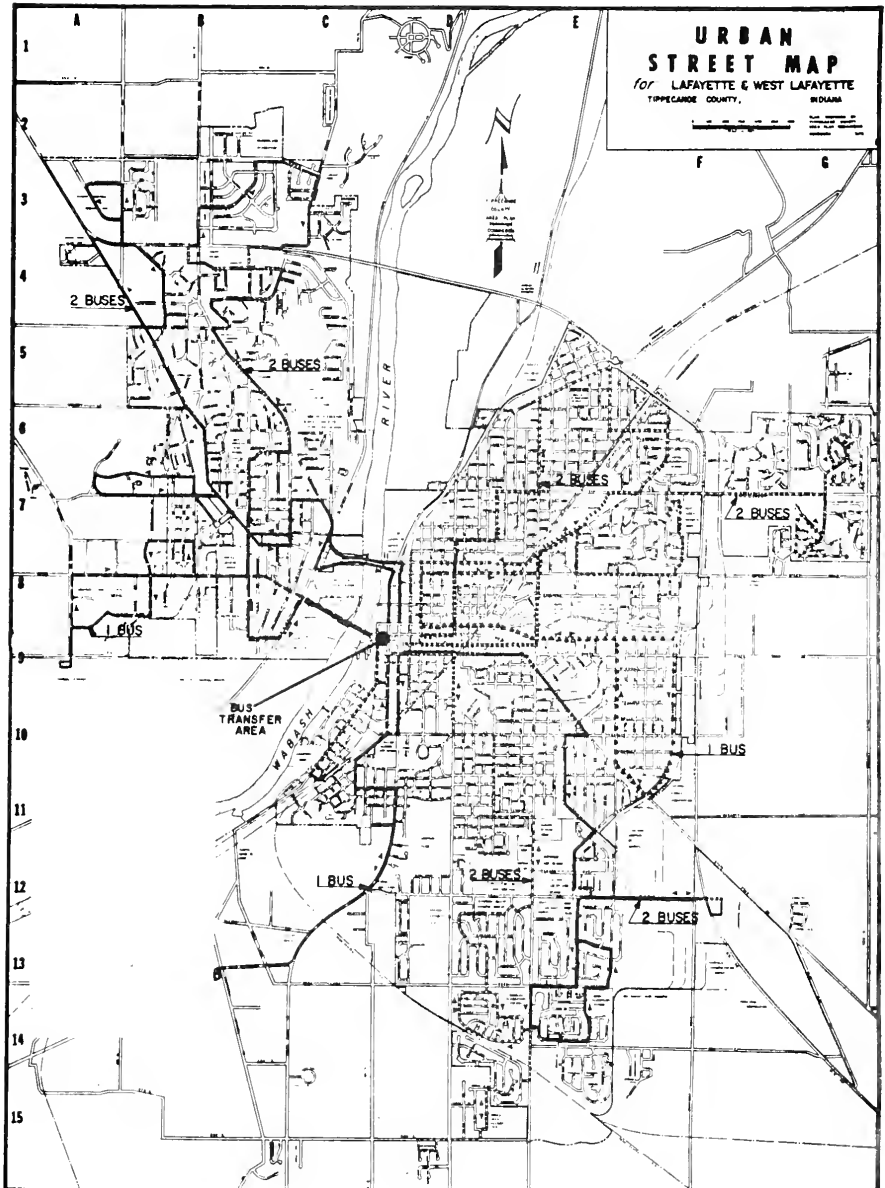
FIGURE 5-7   ROUTE   CONCEPT   B

direct access to the Lafayette Square Shopping Center and
to the shopping mall at the intersection of Sagamore
Parkway and Teal Road. They have to transfer either at
downtown or at the end of the line near Eastway Street.
Both transfers subject the passengers to either long bus
travel times or long waiting times, which may discourage
the use of transit for that direction of travel.

Concept C - A fifteen bus, 7 leg, three two-way loop system:

Concept C may be considered the best system developed
for it is designed to contain the best of the two previous
concepts.

Concept C, as shown in Figure 5-8, is an improvement
to Concept B. The Columbia Park - Mall leg is joined to
the 18th Street leg to achieve greater flexibility to the
system by providing two-way loop service. The disadvantage
identified in Concept B is being eliminated by this
connection.

Similarly the connection of Salisbury and Northwestern
legs in the city of West Lafayette allows an easy movement
between the two legs without going through the downtown
area. In addition, it makes the busy commercial strip on
Sagamore Parkway a common part of both legs.

A special route operating on Canal Road was added to
the system. The route would operate as a test route for
peak periods only. It requires only one bus to provide a
half-hour headway. It is felt that since a good number of
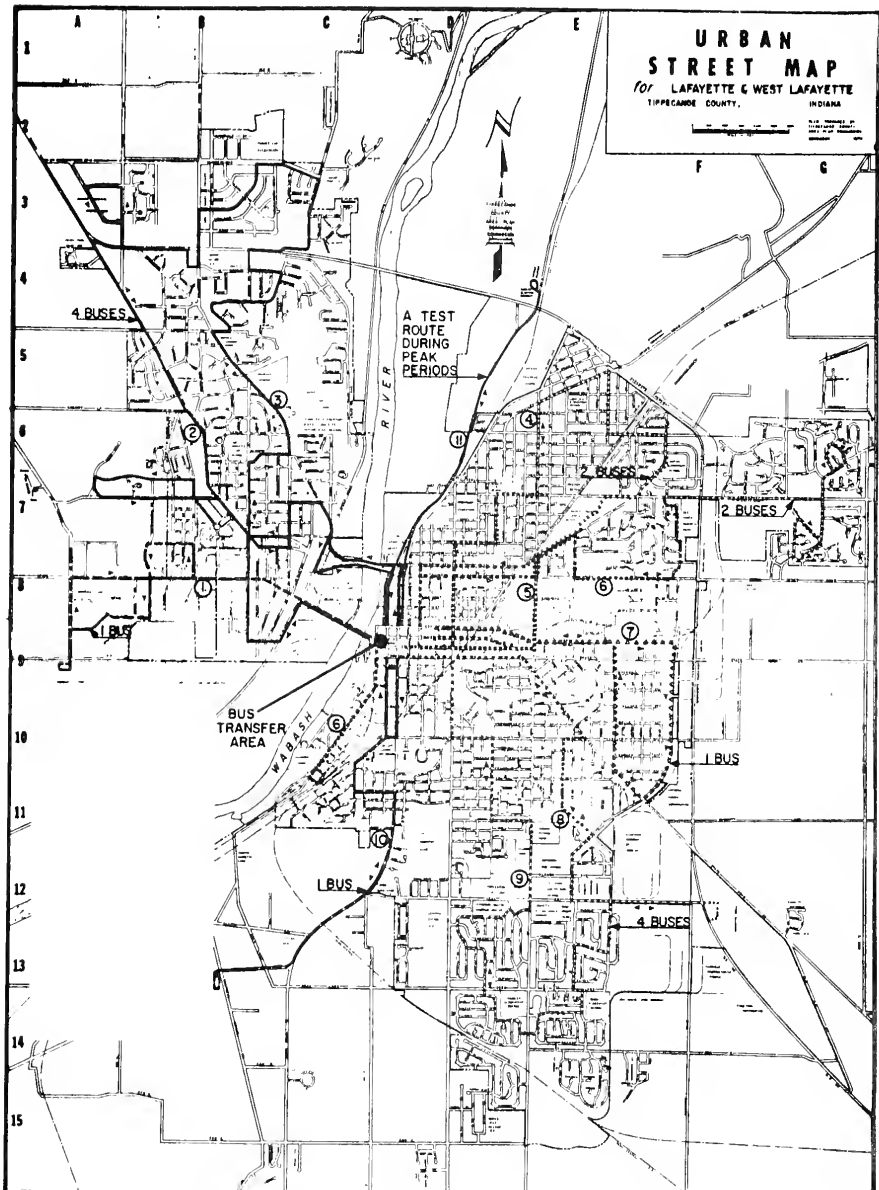
FIGURE 5-8   ROUTE CONCEPT C (THE SELECTED SYSTEM)

small industries and commercial strips are located on that route which employ a good portion of the labor force, a bus service during peak periods could be feasible. However, if the route is found to be inefficient and is raising little patronage, the service could be easily discontinued.

The System C is well adaptable to reduction in service in off-peak periods. No need is required to alter the route configurations or to interrupt the service on certain routes. The two-way loop service could be changed to one-way loop service and by cross-connecting the half-hour legs, the entire system could be served by five buses providing an hour headway on all routes.

The disadvantage of the two-way loop service is that it inhibits the extension of the routes to new service areas. However, the transit network chosen should never be considered fixed for all time. Each route should be reviewed and reevaluated for its effectiveness as the conditions require. Therefore, the above disadvantage should be overlooked for the greater flexibility achieved in the system, especially when the design is for short-range planning.

Analysis of the Selected System

The route configuration of Concept C was subjected, before its final selection, to a detailed analysis to

improve its operating efficiency and to analyze its
benefits and disadvantages.

Discussion with the bus drivers and the bus management
provided valuable information on problem areas that should
be serviced, areas of poor road geometry including turns
and grades and unique local requirements.

It was obvious from the length of the various routes
that 30 minute headways could be provided on the entire
system. The routes had been chosen on the assumption that
an operating speed of 12.0 miles/hour on the average would
be feasible. A field testing of the routes confirmed the
above assumption. No problem was encountered on all the
driven routes. During the test runs the short routes were
driven in 30 minutes and the long routes were driven in
one hour. No modifications was felt necessary on any of
the routes, and based on the field test data, 30 minute
headways could be implemented on the entire system.
Route Name Designation: Having established the final route
configuration, it was necessary to designate each route.
Each leg of the system is given a different name. But a
problem would arise with the two-way loop routes. The
solution would be to identify each of them as composed of
two one-way loop routes, one turning clockwise and the
other turning counter clockwise.

The names chosen for the routes as numbered in Figure
5-8 are:

```
 1 - University
 2 - Northwestern-Salisbury
 3 - Salisbury-Northwestern
 4 - Hartford-Market Square
 5 - Market Square-Hartford
 6 - Wabash-Union-Greenbush
 7 - Ferry-Earl
 8 - Mall-18th Street
 9 - 18th Street-Mall
10 - 4th Street-Road 25
*11 - Canal Road
```

*This route would be implemented on a trial basis
  for peak periods only.

Schedules: The basic schedule would provide 30 minute

service on all routes. On the one-hour routes two buses

are used to provide a 30 minute headway.

Tabulated in Table 5-2 are the half and one hour

schedules of all the routes. In this schedule, only

prominent stops on each route are considered for timing.

One bus for each route leaves the Courthouse area at the

same time, which is considered as zero-hour time for ease

of comparison.

As mentioned before, the one-hour service on all

routes would be achieved by converting the two-way loop

routes to one-way loop routes and cross-connecting the

30 minute routes. This would only require five buses for

the total service. If the two-way loop service on the

longer routes is still desired, seven buses would meet the

one-hour service for the entire system.

It is recommended that bus service would be provided

on Sundays and Holidays, on the same basis as weekdays. It

TABLE 5-2   THE SELECTED ROUTES TIMETABLES

Route 1 - University

Court-House	State-Grant	Purdue Airport	State-Intramural	State-Grant	Court-House
0:00	6:00	14:50	18:20	21:00	27:00

Route 2 & 3 - Northwestern - Salisbury

Court-House	Northwestern-Grant	Northwestern-Sagamore Pkw.	Grants Store	Grant-Northwestern	Court-House
0:00	7:50	22:15	38:50	49:50	58:10

Route 4 & 5 - Hartford - Market Square

Court-House	St. Eliz. Hospital	Schyler -24th	Market Square	South -18th	Court-House
0:00	7:15	12:30	20:00	24:30	29:00

Route 6 - Union-Greenbush-Wabash

Court-House	Market Square	Greenbush-Shenandoah	Market Square	Wabash-Manford	Court-House
0:00	11:30	22:00	39:00	55:45	58:30

Route 7 - Ferry-Earl

Court-House	Ferry-Earl	Earl-Main	26th-Ferry	Ferry-9th	Court-House
0:00	7:30	12:10	20:45	24:15	27:45

Route 8 & 9 - Mall - 18th st.

Court-House	Lafayette Square	Lafayette Mall	Teal -18th	Kossuth -9th	Court-House
0:00	12:30	20:00	41:25	47:45	57:00

Route 10 - 4th-Rd. 25

Court-House	4th-Kossuth	Three Sons	Westchester Apts.	4th-Owen	Court-House
0:00	4:00	7:15	11:10	20:30	27:15

would encourage the patrons to depend on the bus service to meet all their travel needs. This service should be tried for the first six months of the implementation of the new bus system. Then, an evaluation of the ridership would decide whether to continue or discontinue the service.

Coverage: The area covered by the selected system is shown in Figure 5-9. In this figure, the quarter mile distance on both sides of the route is being used as the catchment area. Using this criteria, the service area is well covered by the recommended system. However, to compare the areas that are better served and to indicate the areas that would require bus routes if better level of service is desired, another map is prepared using the 1/8 mile as the maximum walking distance to the bus route. The map is shown in Figure 5-10. It also shows that most of the service area is covered by the selected system. The uncovered areas are thin and small in size and are not concentrated in one part of the study area. No additional routes are needed to cover these areas. If more buses were to be used to improve the service, the reduction in bus headways using the same routes would be recommended.

Level of Service: The level of service is a measure of the service offered to the customers by the operations of the bus system. It depends on many factors which are part qualitative and part quantitative. The qualitative
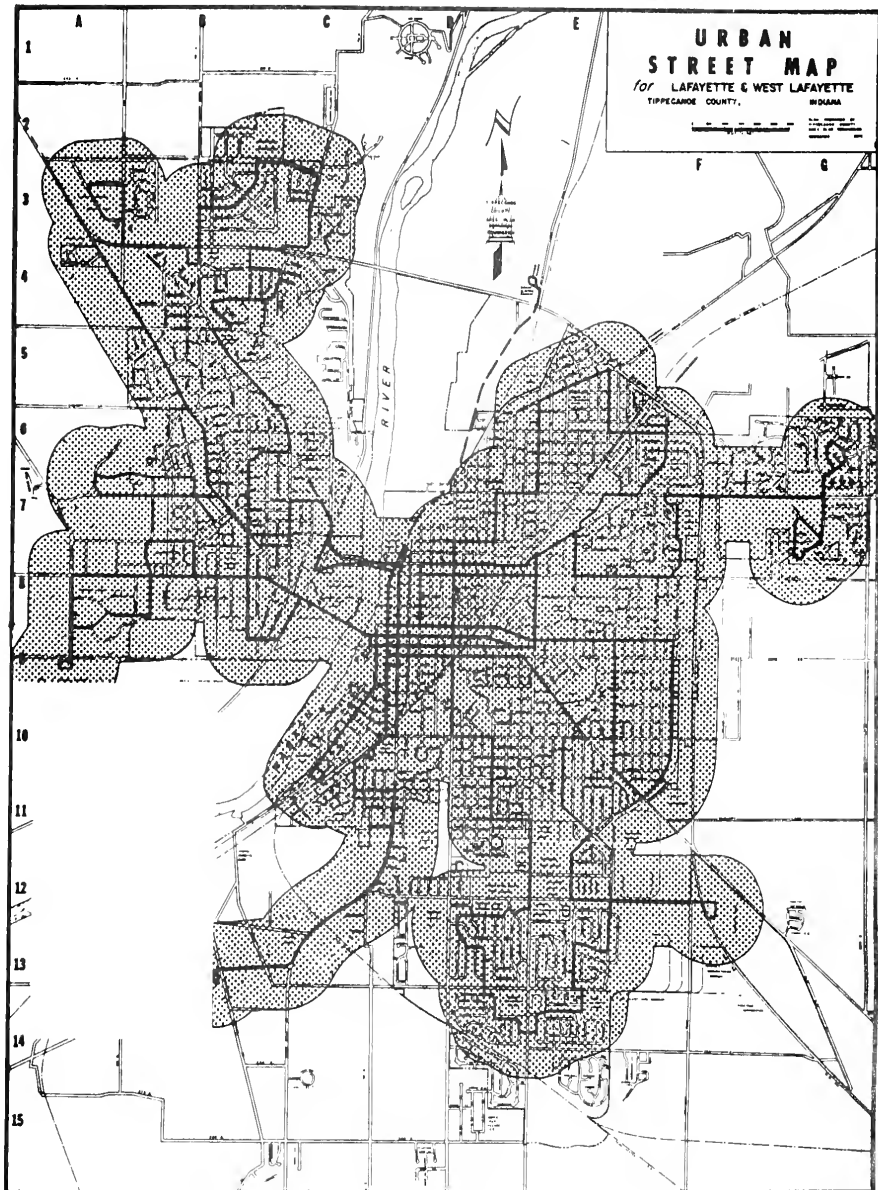
FIGURE 5-9   BUS   ROUTE   COVERAGE
(1/4   MILE   ON   EACH   SIDE   OF   ROUTE)
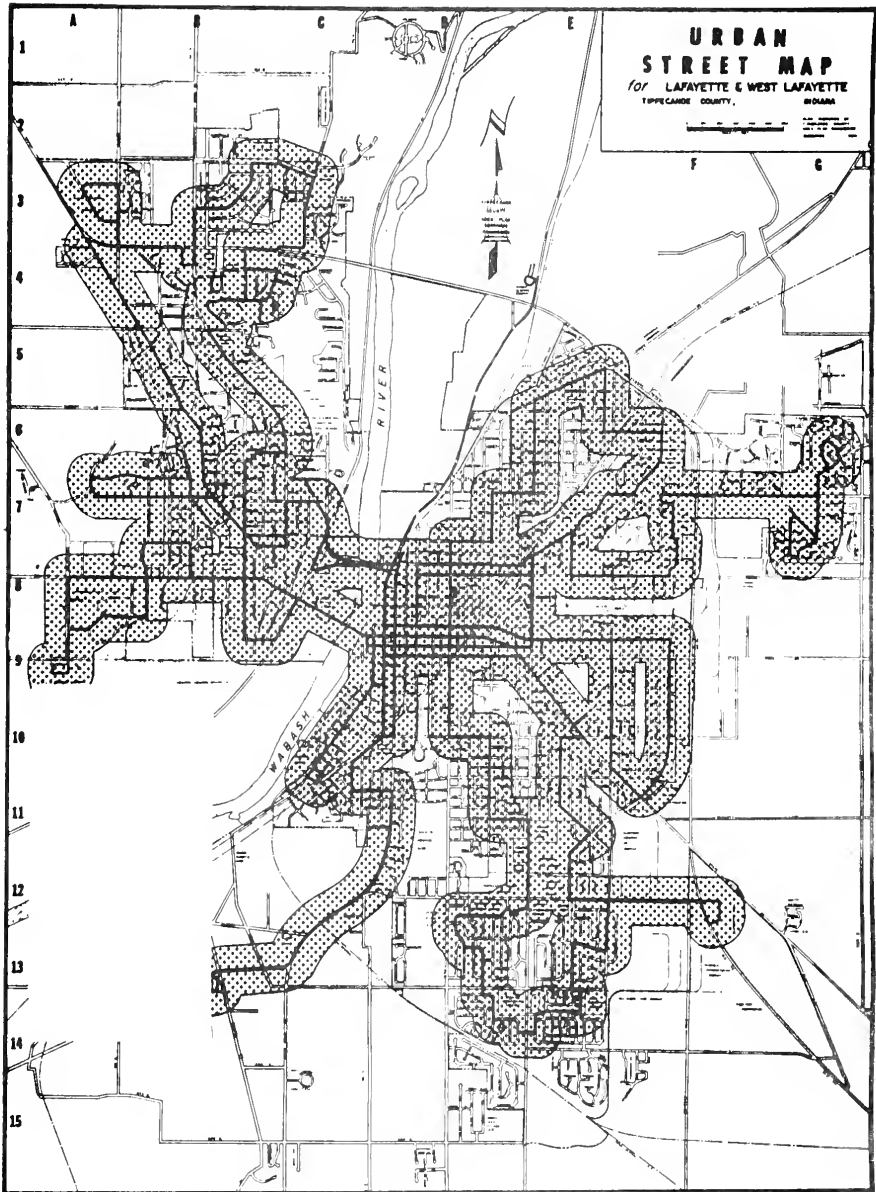
FIGURE 5-10 BUS ROUTE COVERAGE
(1/8 MILE ON EACH SIDE OF ROUTE)

variables in this research such as safety, comfort and
convenience are assumed to be provided by the bus systems
in consideration. It is a justifiable assumption under
the present technology of the bus transportation systems.
The quantitative variables such as travel time, access-
ibility (waiting time and walking time) and seat availability
are the main factors that are considered in determining
the level of sercice. Seat availability in the fixed-
route bus system is not a problem. The selected system
provides 750 passenger seats per hour, a capacity which
is difficult to exceed with the present and forseeable
future demand, even during the peak periods. The
passenger seat figure is calculated from fifteen, 25 to
30 passenger buses running at half-hour headways. There-
fore the total time spent by the user on the system is the
main factor to consider in determining the level of service.
The total time is composed of bus travel time, waiting time
and walking time in case of the fixed-route system. But
the time spent by the user on the system is relative,
rather than absolute in value. This figure is compared to
the time taken by the user if he made his trip by car
instead of by bus. Hence the level of service figure is
calculated as follows:

$$\text{Level of Service} = \frac{\text{System Total Service Time}}{\text{Direct Travel Time by Auto}}$$

The ratio will also be used to measure the level of service offered by the demand-responsive bus system which will be analyzed in the next chapter. It will allow a comparison between the level of service offered by the two bus systems.

The value of the level of service offered by the selected fixed-route bus system is equal to 2.35. The computations are described in detail in Appendix A. A hand simualtion (using Monte-Carlo Technique) of 50 demands during the peak periods is used in the computation. The traffic zones are assigned different probabilities for being a source of origin and a source of destination for a particular demand. The destination assignment is based on the number of employees in that zone. The origin assignment is based on the number of working force in that zone which is calculated by subtracting the young and old people from total population.

The bus travel time is calculated from the time schedules of the system. Eight minutes are considered to be the average walking time to and from the bus routes by the user at both ends of the trip. It is clearly shown from the coverage maps displayed earlier that it is a conservative estimate. Seven minutes is considered to be the average waiting time of the user at the bus stop.

The auto travel time is computed similarly as in the computer simulation of the Demand-Responsive bus system.

This will be discussed in detail in the next chapter.

Other values of level of service are computed for different waiting times. The value of level of service is found to be equal to 2.78 and to 3.67 for an average waiting time of 12 minutes and 22 minutes respectively. The average level of service of the 15 bus-selected system for the two waiting times of 7 and 12 minutes is equal to 2.5 which is still an acceptable level of service. The 22 minute waiting time corresponds to a service of 7 buses operating on a one-hour headway. The capacity of the system at this cut-in-service diminishes to 175 passenger-seats per hour, although the coverage area remains the same. These figures show that as the average waiting time increases due to cut in service, the measure of level of service deteriorates rapidly to untolerable limits. Therefore to keep the level of service within the acceptable limits which is between 2.2 and 2.5 times the direct auto travel time, according to an M.I.T. study (19), 15 buses should be used in the fixed-route system to operate on a half-hour headway.

CHAPTER 6:   DEMAND RESPONSIVE BUS SYSTEM

Introduction

The fixed-route, fixed-schedule bus system primarily serves a few radial corridors in urban areas. For many urban trips, transit riders must walk or drive some distance to the nearest transit stop, wait for the next vehicle, and usually transfer before reaching their final destination. With the tendency toward low-density living and more diverse travel patterns, the situation becomes more critical.

To provide a better level of service for the community of Greater Lafayette Area, an alternative concept of providing bus public transportation is being considered. The concept of a demand-responsive bus service,usually known as a Dial-A-Ride, was studied and analyzed.

Dial-A-Ride can provide direct door-to-door service between any two points in an urban area, thus serving the wide variety of travel desires that are predominant today in low and medium density urban areas. Dial-A-Ride, due to its high quality service, could also be a desirable alternative for those who can drive but prefer public transportation.

Operational Characteristics of Dial-A-Ride

How it Works

Dial-A-Ride is a personalized door-to-door public transportation service. A fleet of small vehicles serves customer requests as they are received. The buses operate without fixed schedules on flexible routes. Vehicle assignments are determined by a digital computer program, operating on the current customer requests to produce maximum vehicle productivity and insure that all customers are picked up and delivered within reasonable time periods. Dial-A-Ride is thus a flexible, dynamic transportation system that adapts to travel desires as they become apparent.

The operation of Dial-A-Ride is shown in Figure 6-1 (6). A customer telephones his request for transportation to a current dispatching office, where the operator notes such trip details as origin, destination and the number of passengers requesting service. The operator enters this information on a typewriter console connected to the Dial-A-Ride scheduling computer, which in a few seconds assigns the best vehicle to pickup the new demand, using a series of scheduling rules. It then produces the estimated pick up and delivery times and the cost of the trip for the new demand. This information is relayed to the customer who then waits for the vehicle to arrive. After the customer boards the vehicle he will be taken to his desired
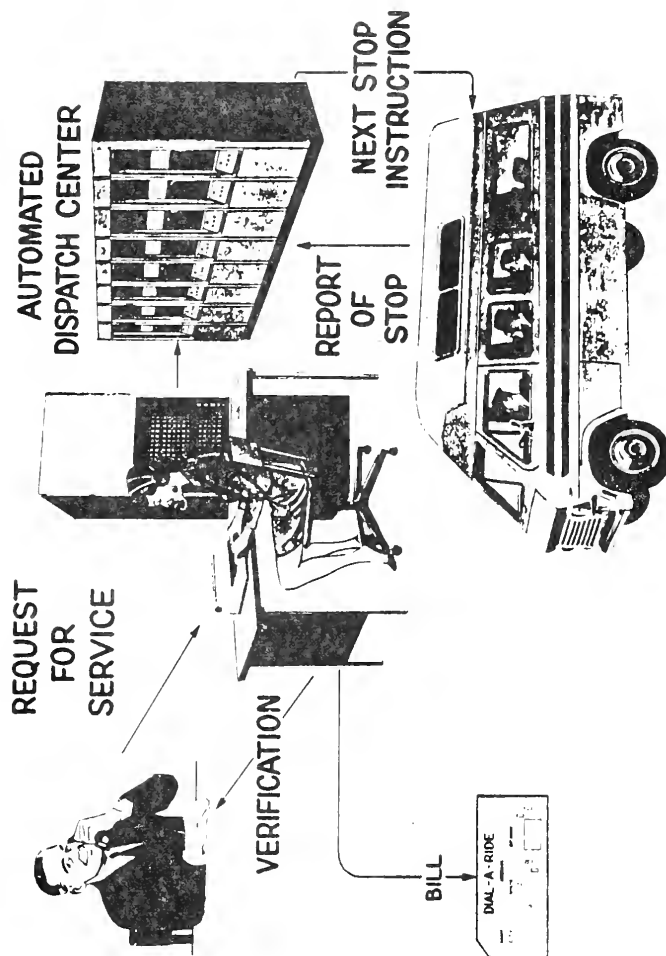
FIGURE 6-1 THE DIAL-A-RIDE CONCEPT (FROM REF 6, P 9)

destination. While moving on its provisional route, the vehicle will make minor detours to pick up and drop off other passengers.

Whenever the vehicle driver makes a pickup or delivery, he keys the computer (using voice communication) to ask for his next destination. The computer supplies the address for the next stop, the customer identification number, and whether the stop is a pickup or a delivery. If the system requires the driver to collect a fare, the cost of the trip will also be provided. The driver will choose the best streets to reach that stop or seek help from the central dispatcher or passengers if he is unsure. Therefore, the driver proceeds on a stop-by-stop basis knowing only his next stop at any time. On the other hand, the computer stores the complete, tentatively planned tour of each vehicle at all times. Complete tour information is not given to the driver because of frequent tour changes and the impossibility of remembering all the planned stops for the entire tour (19).

The possible services of Dial-A-Ride range from "many-to-one" (many origins to one destination) to "many-to-many" (many origins to many destinations). Many-to-many is applicable where the origins and destinations are diversified, a phenomenon occurring with increasing frequency in today's metropolitan areas. The Greater Lafayette Metropolitan Area is no exception. The activity

centers are scattered and dispersed and the urban travel
patterns are varied and decentralized, especially in off-
peak hours. A many-to-many Dial-A-Ride service with
computerized dispatching operation is being considered for
the study area.

Problems Encountered in the Operation of Dial-A-Ride

1 - Telephone lines: An intending passenger has to have
access to a telephone line in order to call for service.
This medium of communication might limit the potential users
at one end of the trip (house-to-others) to telephone
owners. Today the majority of urban residents have telephone
lines. Yet, the small minority of poor residents who do
not have telephone lines may have a problem in reaching the
service. At the other end of the trip predominantly
others-to-home, special direct telephone lines must be
installed at the activity centers to allow the users to
dial for service.

2 - Operators: Adequate number of operators must be hired
to answer the service calls depending on the volume of
demand. The requests must be processed with a minimum
delay. The customer will be discouraged to use the service
if he waits a long time to receive an answer. His first
point of contact with the system through telephone
communication is very important. The operators should be
well-trained to receive his request correctly, quickly, and

in a manner that does not irritate or annoy the customer.
They should be able to transmit correctly the format
messages to the central control computer and to provide
efficient answering services.

3 - False Calls: The operators could receive a number of
false calls from youngsters or trouble makers. They should
be able to screen these calls as they gain experience. A
heavy penalty should be indicted on the false callers to
limit such acts.

4 - No-Show: An expected passenger's non-appearance (no-
show) could occur when the bus reaches the doorstep of the
caller. A policy should be reached by the management on
the time the driver should spend waiting for the customer.
After that time the driver should proceed to his next
destination.

5 - Manual-Voice Communication: Another problem area could
be the communication sub-system between the driver and the
dispatching center, which indicates the driver's next
destination. If voice communication is chosen, the
frequency used should not be interferred with other fre-
quencies used in the area such as those used by the police
department, by taxi cabs, and others using radio
communication. It should have a high intensity to reach
the furthest point in the area from the dispatching center.

6 - Computer Break-down: The computer controlling the operation of Dial-A-Ride system may fail. It is mandatory to have a method of continuing system operation. It could be either by including an automatic computer backup system, which is very expensive, or by adopting a manual backup scheme. The manual backup system should efficiently replace the computer operation. The operators and the drivers should be well-trained in advance to meet such an emergency.

Area Size

The size of the study area is a controlling factor in the operation of Dial-A-Ride system. It affects the level of service provided to the customer with a given number of buses. More buses are required to provide the same level of service in a larger size area, if passengers are promised to be delivered within a restricted time of their pick-up. The productivity of the bus would decrease as the size of the area increases. The bus then, would have to haul a particular demand a long distance to satisfy his guaranteed times, which would limit its ability to pick other customers on the way. At this stage, the buses would closely operate as taxis and would defeat the purpose of the system.

Dial-A-Ride system is probably not best suited for long trips and so should only play a complementary role in

transportation in large cities. Studies conducted in the field of demand-responsive bus systems have not reached a decision on the upper limit of the size of the service area. However, the work done at M.I.T. (25) through computer simulation have shown that an area size of 6 miles X 6 miles is feasible for this kind of service. The size of Greater Lafayette Area has the dimensions of 4.6 miles X 5.5 miles, which are within the feasible limits of such an operation.

The effects of different area shapes on the level of service have been studied through computer simulation at Northwestern University (1). The results show that Dial-A-Ride operation in districts of different shapes, but similar land area, will be almost identical.

Demand Level

Dial-A-Ride is a form of public transportation that is controlled by its users. In broader sense, it is called by planners a "demand-responsive" system. In contrast, to fixed route bus system the Dial-A-Ride operation is determined by its demands. The demands by their volume control the number of buses in operation and by their spatial distribution and service requirements affect the level of service provided. After the routes and schedules are designed in a fixed route system, the buses operate without any consideration to the short term variation in demand.

The level of demand determines the feasibility of
operation of the Dial-A-Ride systems. At very low demand
levels, taxis would be competitive with Dial-A-Ride. Their
less sophisticated control system might result in lower
costs at similar vehicle productivities. At high demand
levels, fixed-route buses are well suited to take advantage
of large-vehicle capacity and simplicity of operation.
Their productivity would continue rising with increasing
demand level when the Dial-A-Ride productivity had been
shown to level out. Thus at fairly high demand levels
fixed-route buses would be more efficient than Dial-A-Ride.
This implies that a medium demand level would be best for
Dial-A-Ride.

A look at the hourly trip distribution of the old bus
service system as shown in Figure 5-4 indicates that the
demand level during the peak-hours ranged between 150 to
180 passengers per hour. The above demand may stay at this
level or may increase with an increase in level of service.
In both cases, the Dial-A-Ride system required to satisfy
the peak-hour demand at a good level service exceeds the
feasible operational limit that the future bus system of
Greater Lafayette Area can provide. This assumption will
be clearly identified in the analysis of the simulation
runs at the end of this chapter. So, this study limited
its analysis of the Dial-A-Ride system to off-peak periods.

No attempt was made in this study to calculate the expected level of demand for Dial-A-Ride in off-peak hours. Instead, a range of demand was considered to cover all the possible levels of demand that the system may encounter in its off-peak operation. A demand as low as 30 calls/hour and as high as 150 calls/hour was considered in the computer simulation of the system.

Scheduling Algorithm of the Dial-A-Ride System

Introduction

The technical operation of the system, as mentioned earlier, requires the development of the set of rules (algorithm) that the computer will use to make vehicle assignments to passengers requesting service. This assignment algorithm plays a vital role in the system. It governs the quality of service and also the number of vehicles required, which is the principal determinant of the cost to the user. Thus the success of Dial-A-Ride depends on how well the assignment algorithm performs.

This study did not attempt to develop a new scheduling algorithm for the system. Instead, it was decided to choose one of the already developed algorithms for such an operation. After literature review on the subject, the algorithm developed at M.I.T. was chosen for use. In addition, the computer simulation model which uses the algorithm was available to the author for use.

In the remainder of this section the rationale for the development of the proposed algorithm, and the algorithm itself will be summarized.

Algorithmic Considerations

In the design of assignment algorithm for the Dial-A-Ride system, the following three specific issues are to be addressed (25):

1. Information requirements
2. Algorithm objectives
3. Implications of real-time environments

The information requirements describe the variables which define the state of the system at any time. Having defined the data available, the algorithm is the mechanism for achieving certain service objectives which should be defined. The implications of the real time define the computational environment within which the algorithm will have to operate.

Information Requirements: In order to develop any algorithm, certain information about the current state of the system must be available to the computer. This information is of three types, user dependent, vehicle dependent, and system dependent (25).

User-dependent Information

i) Location of the origin of the desired trip.

ii) Location of the desired destination point.

iii) Time of which request was made.

iv) Number of people making the trip.

Vehicle-dependent Information

i) Next destination of each vehicle (output from algorithm).

ii) Information relating to each passenger on board such as his destination and service time.

System-dependent Information

i) Street Network and the associated travel times between points in the network.

Algorithm Objectives: The aim of the ideal algorithm would be to maximize the satisfaction of all system users at minimum cost. In more quantitative terms, the general aims of minimization of the user costs and service times may be stated as follows (25):

1. To minimize the total time spent on the system (both present and future) within constraints on the worst individual service times allowable and on the number of vehicles available.

2. To minimize the number of vehicles required to provide a service offering guaranteed bounds on the mean and worst service times.

System service time is the sum of 1) the time the customer waits to be picked up after he calls for service and 2) the driving time to his destination.

In order to evaluate and compare service in different demand environments, in a general manner, a level of service figure is defined as:

$$\text{Level of Service (LOS)} = \frac{\text{System service time}}{\text{Mean direct driving time}}$$

Real-time Environment: In developing an assignment algorithm it is also important to recognize the real time environment within which it must operate. This imposes computational limits on the algorithm and modifies the time cost framework within which alternative algorithms should be compared. Since the cost of computation must be included in the overall system costs, the aim in designing an algorithm must be to formulate a method for obtaining good assignments quickly.

Statement of the Problem

Formulation of the problem involves defining sets of constraints which guarantee feasibility, and an objective function to select the best of the feasible solutions. The constraints may be stated as follows (25):

1. The origin point of all uncollected demands and the destination point of all demands must be visited by one vehicle once and only once. This ensures that all demand points are visited.

2. The origin and destination points of each uncollect-
   ed demand must be visited by the same vehicle. This
   assumes that no passenger changes vehicle to reach
   his destination.

3. For each uncollected demand the origin must pre-
   cede the destination on the vehicle's proposed
   route.

4. All passengers currently on board a vehicle must
   be delivered by that vehicle.

5. The proposed route of each vehicle must be
   continuous.

6. The arrival times at each passenger's origin and
   destination points must be within the service
   guarantees.

7. The maximum allowable number of passengers on
   board a vehicle at any time must not be exceeded.

8. There are a known number of vehicles operating in
   the system.

This set of constraints determines the feasibility or
infeasibility of a particular solution.

The desirable objectives of the algorithm were stated
before but because of the uncertainty associated with the
occurrence of future service requests it is not possible to
formulate in closed form the minimization of service times
to all current and future users. This would require a
complex probabilistic expression which would render

infeasible the application of the algorithm in the real-
time environment. It is then impractical to look for an
optimal solution to the problem as it exists, and some
approximation of the problem is required. The most
promising approximation to the desirable objective is
discussed below:

1. Minimize some combination of total current users
   service times and total vehicle travelling times.
   The minimization of the total vehicle travelling
   times is best from the future users viewpoint,
   because vehicles are freed as soon as possible
   to serve these, as yet unknown, requests. However,
   service to current system users will not generally
   be optimal. This fairly general objective
   attempts to reconcile service to current and
   future users.

The above objective function works as a selection
criteria for the best feasible solution.

Algorithm Design

The research done at M.I.T. (25) has found that the
classical optimization solutions to the customer-to-
vehicle assignment problem such as integer programming,
dynamic programming, branch and bound are not feasible.
While theoretically they could be formulated and solved
for small problems, no reliable method for solving problems

of realistic size has been found. This statement is true even if the real time constraints under which the algorithm must operate are relaxed.

Since optimal-solution algorithms are infeasible the non-optimal algorithms (heuristics) were surveyed. A type of heuristic featuring the provisional assignment of new demands was selected as being the most promising for further developments.

The assignment heuristic is primarily concerned with deciding which vehicle should serve which user. The assignment of a new demand to a vehicle has two components:

1. Search for feasible assignments.

2. Choice of the best of these feasible assignments.

The search for feasible assignments of a new demand starts by considering the provisional routes of all vehicles which provide the service for all passengers. The provisional route of a vehicle is a sequence of stops which passes through all the origin and destination points of its assigned passengers.

These provisional routes are designed first and fore-most to satisfy the waiting, travel and total service time guarantees of all users. If these services guarantees are satisfied for all users active on the system, the current instantaneous state may be termed feasible.

When a demand arises the aim of the heuristic is to provisionally assign it to one vehicle while maintaining a feasible state i.e. without violating the service constraints of the existing passengers or the new passenger.

Slacks representing permissible deviations from the direct route are computed from the binding constraints. Two types of slacks are considered, the node slack and the link slack. The node slack is the allowable increase in length of the provisional route which can be made without breaking the service guarantee for that node. The link slack is the allowable increases in link lengths which result in no constraint violations on the complete provisional route of the vehicle. These slacks are used to determine whether particular placings of the new origin and destination of a new request will violate any of the user's guarantees for passenger assigned to that vehicle and the new users.

Figure 6-2 shows an insertion of a new origin in the provisional route of vehicle 6. Travel times between points S3 and S and S and S4 must be estimated as input to the node insertion process. To select vehicle 6 for passenger 11, the algorithm·must consider the delay in delivery of passengers 8, 9, and 10. The calculations for this node insertion process are shown in Tables 6-1 and 6-2. Since the link slack (P4 = 4) is greater than
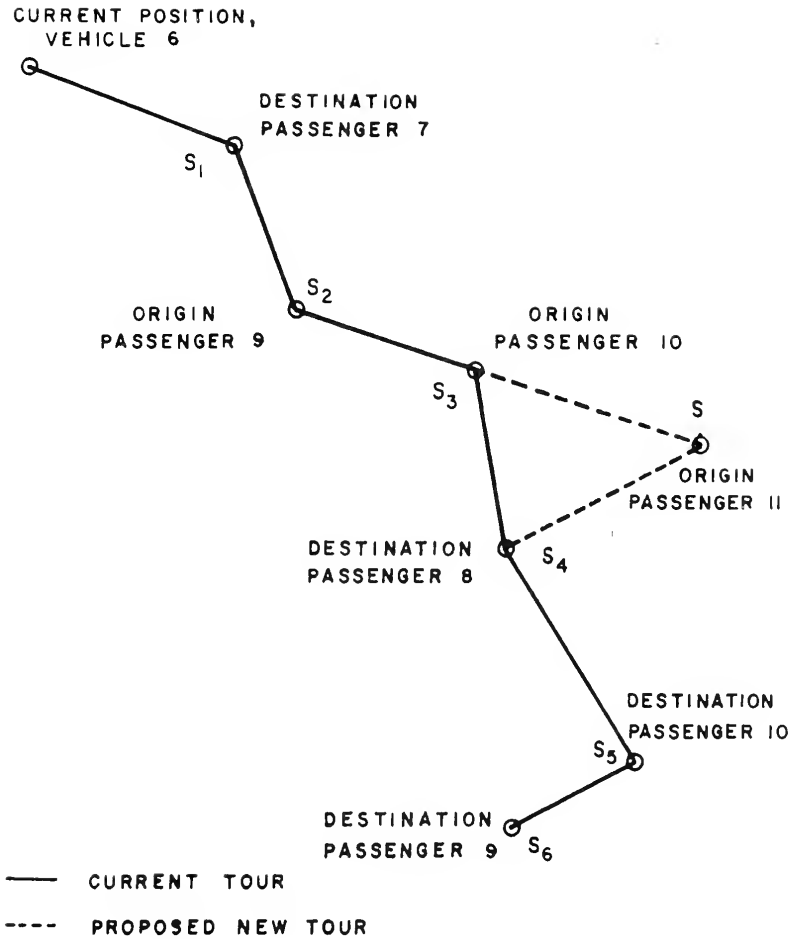
FIGURE 6-2   NODE INSERTION PROCESS (FROM   REF. 25, P. 4-10)

TABLE 6-1 PROVISIONAL ROUTE (FROM REF. 25, P.4-7)

STOP	TYPE	CONSTRAINT TIME E TYPE[1]			EXPECTED ARRIVAL TIME, V	NODE SLACK R	LINK SLACK P
		1	2	3			
S_1	d_7	—	13	16	11	2	2
S_2	o_9	15	—	—	12	3	3
S_3	o_{10}	18	—	—	13	5	4
S_4	d_8	—	19	18	14	4	4
S_5	d_{10}	—	21	22	15	6	5
S_6	d_9	—	24	21	16	5	5

[1]Constraint Type
1 = Waiting Time
2 = Traveling Time
3 = Total Time

Node Slack (R) = Expected Arrival Time(V)-Binding Constraint(E)

Link Slack (P_i) = Minimum Node Slack ($R_1, \ldots, R_n$)

All values are in Time Units

TABLE 6-2   NODE   INSERTION (FROM REF. 25, P.4-11)

STOP	TYPE	BINDING NODE CONSTRAINTS (AND TYPE¹),E	EXPECTED ARRIVAL TIME V		NODE SLACK R		LINK SLACK P	
			BEFORE	AFTER	BEFORE	AFTER	BEFORE	AFTER
S_1	d_7	13(2)	11	11	2	2	2	1
S_2	O_9	15(1)	12	12	3	3	3	1
S_3	O_{10}	18(1)	13	13	5	5	4	1
S	O_{11}	20		15		5		1
S_4	d_8	18(3)	14	17	4	1	4	1
S_5	d_{10}	21(2)	15	18	6	3	5	2
S_6	d_9	21(3)	16	19	5	2	5	2

Node Slack (R) = Expected Arrival Time (V) — Binding Constraint(E)
Link Slack (P_i) = Minimum Node Slack ($R_1,\ldots,R_n$)
   All Values Are In Time Units

¹Constraint Types
  1 = Waiting Time
  2 = Traveling Time
  3 = Total Time

the detour required to visit S, the node insertion is feasible, i.e., no existing constraints are violated.

In summary, when a new demand arises, the aim is to fit both origin and destination into the route of one vehicle without making any of the existing node slacks negative while still satisfying the binding constraints for the new demand. Each such fit is a feasible assignment of the new demand.

The actual assignment is chosen by evaluating a selection criterion for all feasible assignments. The selection criterion as described in the problem statement tends to minimize the expected service times of present and future users.

To simplify the search process and reduce the computational load a simplified selection criterion was developed. The final form of this objective function Z is (26):

Minimize $Z = (N_1 + 1) E_1 + (N_2 + 1) E_2 + ST$

Where N_1 is the number of customer deliveries after the insertion of the origin stop for the new demand.

N_2 is the number of customer deliveries after the insertion of the destination stop of the new demand.

E_1 is the vehicle detour time due to the insertion of the origin of the demand.

E_2 is the vehicle detour time due to the insertion of the destination of the new demand.

ST is the service time of the new customer for this insertion.

Where the new demand has been assigned to one of the many possible vehicles, the projected future route for that vehicle is updated to include the new passenger's collection and delivery points.

Computer Simulation of the Dial-A-Ride System

Introduction

A computer simulation model is used to test and evaluate the heuristic assignment algorithm. Computer simulation is used for modelling because the relationships between variables in a Dial-A-Ride system operating with a specific heuristic are probabilistic and too complex in nature for any other fruitful means of analysis.

Simulation is a technique for conducting experiments on a computer using mathematical models to describe the behavior of systems over periods of time. With simulation, the analyst duplicates real world conditions, as nearly as possible, by means of computer programming. It is an effective tool in circumstances where it is desirable to study changes in a system without having to affect physically the system's current operation, or where it is economically infeasible to implement various experimental schemes for evaluation of the results.

Simulation is useful as a technique to evaluate alternative designs. Specifying a set of input parameters in a simulation model will produce a certain final condition of the system. However, this observation will not directly help in predicting system performance under a different set of parameters since the complete system effects are still not understood. Simulation is therefore a very useful tool with which to analyze the overall implications of altering one of the inter-event relationships in a stochastically complex system. Although it is the least desirable solution technique for solving problems, it has the greatest applicability.

Objective of the Simulation Model

In this study, the main objective of the simulation model is to estimate the number of vehicles required for specific operating conditions and quality of service. These results would be used in an economic analysis of the system which would in turn lead to a decision on the utility of a Dial-A-Ride type of system.

The Model

Program Structure: A brief description of the simulation model is presented in this discussion. A more detailed discussion of this subject is contained in reference (27).

The model is written in Fortran and is an event structured formulation. It consists of roughly fifty sub-programs, each performing a specialized function. The minimum amount of core storage necessary is 150,000 bytes for IBM 360 Computers. For other computers an equivalent amount would be necessary.

The program works by generating demands for service from probabilistic distributions selected by the user. Demands are then assigned to a particular vehicle, by the user specified routing algorithm. As the vehicles collect and deliver their assigned passengers, statistics are gathered on system performance and service quality.

The algorithm, being the main function of the program structure, may be segmented into two major halves, each of which is a composite of several programs.

1. Assign a new demand to a vehicle's tour
2. Determine where a vehicle should go next having completed its current tour.

Briefly, the demand-to-tour assignment involves looping over all vehicle tours. For each vehicle tour, every link is checked as possible fit for the pickup, and for each legal pickup the following links in tour are checked for the delivery stop. This function contains two subfunctions. Determining whether or not insertion of a stop will violate the link constraints and whether or not a certain stop insertion will satisfy the demand's constraints. The three

previous logical functions, vehicle looping, link constraint verification, and demand constraint satisfaction are concerned with generating possible alternatives. However, an evaluation of these alternatives must be made. The relative weights of the choices is the last logical function of demand-to-tour assignment. They are looping on vehicles, verification of link constraints, verification of demand constraints, and evaluating the possible choices.

The second major component of the algorithm is determining where to send a vehicle when it has completed its current stop. There are only two possible cases: There are remaining stops on the tour or the tour has been completed. In the first case, it is only necessary to send the vehicle to the next stop on the tour. However, if there are no more stops on the tour some decision must be made as to what should be done with the vehicle. One is to leave the vehicle where it is, i.e., where it made its last stop, the other alternative is to send the vehicle to one of a set of dispatching points.

Program Variables: The program enables an analyst to simulate a wide range of different conditions in a Dial-A-Ride environment. These different conditions can be simulated by changing one or more of the following major variables:

1. Objective function

2. Number of vehicles

3. Vehicle capacity

4. Length of simulation

5. Priority classes & their characteristics

6. Dispatching points

7. Type of service - Many-to-Many

   Many-to-Few

   Many-to-One

8. Temporal demand distribution

9. Size, shape, and demand characteristics of simulation area.

This breadth of system variables enables the system environment to be easily changed. It also indicates the flexibility of the model structure.

Input Parameters: Within a fixed environment the variations between runs of the model may be affected by input changes. The input parameters are summarized below:

Vehicle Data

- Number of vehicles

- Maximum occupancy

- Mean speed between stops

- Stopping time

Demand data

- Inter-demand time

- Origin and destination co-ordinates

- Number of people per demand

Service Characteristics

- Waiting time constraint

- Travel time constraint (a function of distance)

- Total time constraint (a function of distance)

Run Characteristics

- Initial values for random number generators

- Positively or negatively correlated strings

- Length of simulated period

- Output specification and intervals

The format in which the input data should be prepared is explained by the Implementation and User's Guide manual of the computer program. A sample of the data input is shown in Table B-1 of Appendix B.

Output Options: The standard printed output from the model includes the following information and may be repeated as frequently as the analyst desires during a run:

For each vehicle

- Current provisional route

- Current position and occupancy

- Percentage of time 1) empty, 2) unassigned

For each outstanding demand

- Origin and destination

- Time of request and collection

- Number of people

Demand statistics

- Mean, variance, minimum and maximum waiting travel and total service times

- Mean, variance, minimum and maximum waiting travel and total service times, normalized by length of trip

- Number of times each type of constraint has been violated, mean amount of violation.

In addition, the vehicle productivity for the entire run and during the stated periodic times is printed. Statistics on the level and measure of service, and on the service-time characteristics by trip length are also included.

A sample of output data and the interpretation of the abbreviations used are shown in Appendix B. The information on the output data was taken from the CARS Basic Program Implementation and User's Guide (28).

Simulation Experiments

Two measures are of importance to help achieve this objective of the simulation: the cost of the service and the service times experienced by the users. The major

cost components are related to the vehicle. Therefore an indication of cost to the user is vehicle productivity, or the number of passenger trips served by a vehicle in an hour. This is computed from the number of vehicles required to serve the area and the demand level. Thus, the critical parameters that determine the cost operating configuration for Dial-A-Ride system are the area size, demand level, number of vehicles, and level of service. The first three are simulation input parameters while the level of service is an output parameter. The relationship among the different parameters of the simulation is shown in Figure 6-3.

The size and the shape of the study area were not varied through the simulation experiments. Hence their effect on the other critical parameters were not studied. Similarly, the demand characteristics, area characteristics, and vehicle characteristics were kept the same through all the simulation runs. The only input parameters that were varied are the number of vehicles and the demand level. The level of service is an output of the variation of these two parameters.

Specifically, to isolate the effect of each of these three parameters on the performance of the system, a series of experiments were conducted to study:

1. The effect of number of vehicles on the level of service with the demand level held constant.
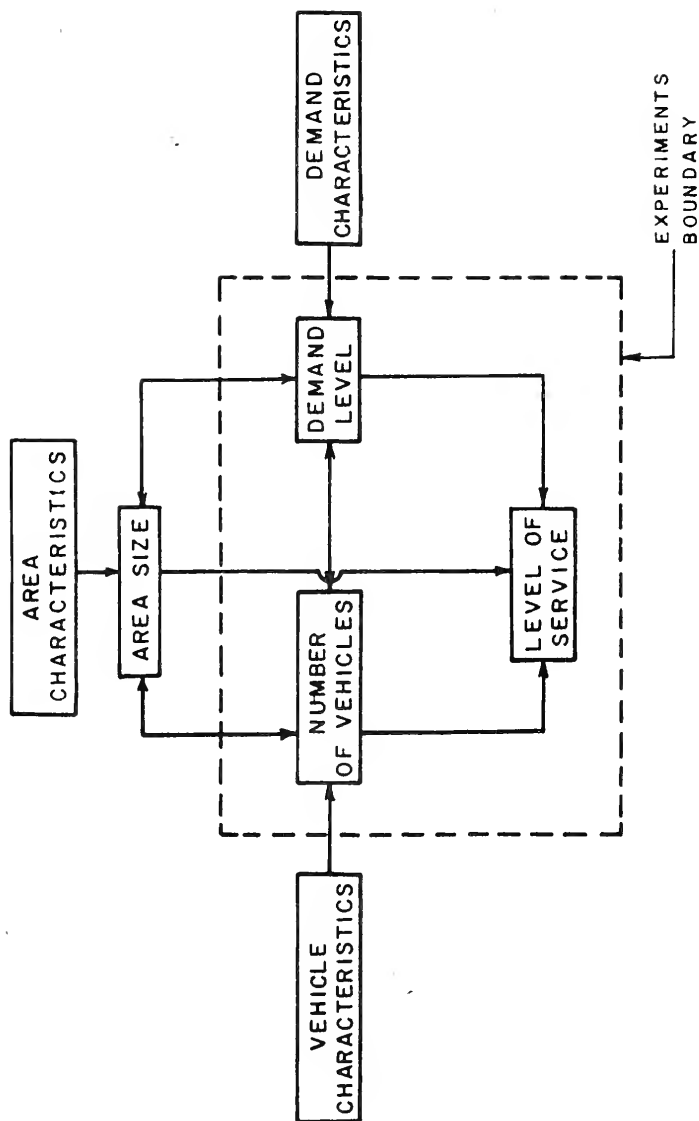
FIGURE 6-3   RELATION AMONG THE DIFFERENT PARAMETERS OF THE SIMULATION MODEL

2. The effect of demand level on the level of service
    with the number of vehicles held constant.

3. The effect of demand level on number of vehicles
    with the level of service held constant. This was
    achieved after conducting a number of experiments
    with different combination of demand level and
    number vehicles.

The values given to the two variable parameters in
the simulation experiments are listed in Table 6-3. The
number of vehicles range between 5 and 14 small buses and
the value of demand level range between 30 and 150 calls
per hour. These values were selected to represent the
possible conditions in the Greater Lafayette Area, as far
as the number of vehicles available for service, and the
number of customers expected during the off-peak hours. In
addition, the number of simulation experiments was limited
by the funds available for the research.

The demand level of 60 calls per hour was held constant
while experimenting with the effect of the number of buses
on the level of service , Table 6-3 (part b). Similarly, 10 buses
were held constant while studying the effect of demand on
the level of service, Table 6-3 (part a).

A constant value of level of service of 2.2 to 2.3 is
obtained through the experiments shown in part C-1 of
Table 6-3.

TABLE 6-3   VALUES   OF   DEMAND   LEVEL   AND
NUMBER   OF   BUSES   USED   IN   THE
SIMULATION   EXPERIMENTS

DEMAND LEVEL (Calls/Hour)	NUMBER OF BUSES
30	10
60	10
90	10
120	10
150	10

(a)

DEMAND LEVEL (Calls/Hour)	NUMBER OF BUSES
60	5
60	8
60	10
60	12

(b)

NUMBER OF BUSES	5	8	10	12	14
DEMAND LEVEL (Calls/Hour)	30	60	90	120	150

(c)

For each of the above experiments, four simulation runs were conducted using different random number generator seeds for the different probability functions. This will allow the initial system status on the spatial demand distribution to be varied from one run to another. The variance of the results within the same experiment will be minimized by summing the results of the four runs and dividing them by four. However, to allow for comparison between two alternative experiments, the external features of the model should be the same, i.e. the initial location of the vehicles and the spatial demand distribution should be the same. This is obtained by using the same probability seeds for the different runs of the two experiments.

The area, demand, and vehicle characteristics that were held constant in the simulation experiments are discussed below.

Area Characteristics

The Dial-A-Ride computer program specifies that the sahpe of the service area should either be a rectangle or a square. It should not be divided into more than 50 rectangular zones. Part of these zones could be void zones such that the vacant, the undeveloped, and the water sections of the service area are included. It is also possible to define rectangles which are simply points. This is provided for a high activity centre which has a many-to-many demand pattern.

Following these conditions, the study area has been defined by a rectangle of dimensions 4.6 miles in the east-west direction and 5.5 miles in the north-south directions. The rectangle has been subdivided into 48 rectangular zones, as shown in Figure C-1 of Appendix C.

In establishing these rectangular zones, consideration was given to the different land use categories, such as residential, commercial, and industrial. Sixteen of these zones are void zones. They were established to cover the river crossings between the two cities, and to fill the undeveloped and the unserviced areas of the defined rectangle. Four of these rectangles were defined as high-activity points. They represent the shopping centres of Three Sons, K-Mart, Lafayette Square, and Market Square.

The relative probabilities of the different zones of containing an origin or a destination of a demand were developed by an intuitive judgment approach based on demographic characteristics of the zones. The demographic data for each zone includes such characteristics as number of dwelling units, total population, number of people older than 62, number of households owning one car or less, number of households owning two cars or more, and number of employees. These data were compiled from the data presented earlier in Chapter 4. To facilitate the assignment of the relative weights, aggregation of the data on a higher level was felt necessary. Thus, the study area is

divided into Lafayette and West Lafayette parts. The West Lafayette part is further subdivided into the northern section and the southern section, where the southern section contains the student community. The demographic factors were accordingly aggregated to this level.

The Lafayette part of the study area is considered to originate 74% of the demand and to receive 69% of the destinations of that demand. The southern section of the West Lafayette part is considered to include 13.5% of the origins and 22.5% of the destinations of the demand. The northern section of West Lafayette is considered to include the remaining percentages. These percentages or weights are further distributed among the zones of the three divisions. The above weighting is established for demands in the off-peak hours.

The values of the demographic data, the zone numbers, the zoning coordinates, and the relative weights of the different zones are shown in Tables C-1 and C-2 of Appendix C. The relative weights are multiplied by 1,000 to eliminate fractions.

The distribution of the trip origins and destinations of the four different runs of the simulation experiments are shown in Figures C-2 to C-5 of Appendix C for a demand of 60 calls per hour.

Distance Adjustment Factor: Another parameter that is related to the area characteristics and which was held constant in the simulation runs is the distance adjustment factor. The computer program computes the aerial distance between any two points in the study area from the cartesian coordinates. An adjustment factor should be developed to relate the air-line distance to the actual distance on the street network of the area.

A number of points were randomly chosen from the maps of the Greater Lafayette Area. Their aerial and actual distances were computed and plotted one against the other as shown in Figure 6-4. The slope of the fitted line came out to be close to 1.2. Instead a value of 1.3 was adopted as the ratio of real distance to aerial distance, to be safe and to include some of the worst possible conditions.

Trip Length Distribution: The relative weighting of the various trip lengths in the simulation experiments was assumed to be uniform. The distribution consists of one step of 6.5 miles width, which is the maximum trip length that can be requested in the study area. No preference is given to any trip length and the trip length is left to be determined by the relative probabilities of the zones. The minimum requested trip length allowed by the system is chosen to be 0.75 miles. It is assumed that the customers will not request the Dial-A-Ride service for a trip less than 0.75 miles.
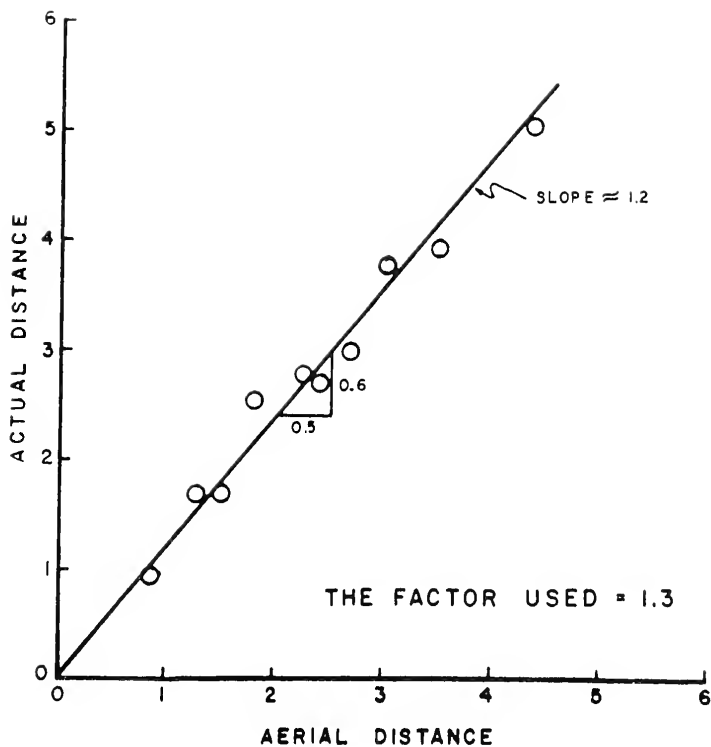
FIGURE 6-4   RELATIONSHIP BETWEEN THE AERIAL
DISTANCE AND ACTUAL DISTANCE

Demand Characteristics

<u>Service Constraints</u>: The service constraints are to be
specified by the user of the computer program. They are
composed of waiting time constraints, travel time con-
straints, and total time constraints. As mentioned
before, the scheduling algorithm of the program will try to
satisfy these constraints in searching for a feasible
assignment of a new demand to a vehicle. They constitute
a major element in the demand-to-vehicle assignment process
and they effect the quality of service offered to the
customers.

A series of experiments were performed at M.I.T. (25)
to determine the effect of variations of the service time
constraints on the performance of the heuristic. In these
tests, values of the constraints were varied but the ratios
between their values were kept the same as the corresponding
ratios of the means with infinite constraints. In Figures
6-5 through 6-7 the mean and maximum waiting, travel, and
total times normalized with respect to the service norms
are shown as functions of the actual constraint values as
a multiple of the mean service times with infinite constraints.
The calculation of normalized quantities is explained in
Appendix B. It is seen from Figure 6-7 that minimum
normalized mean total service times are achieved by setting
all constraints to values of infinity, i.e., making them
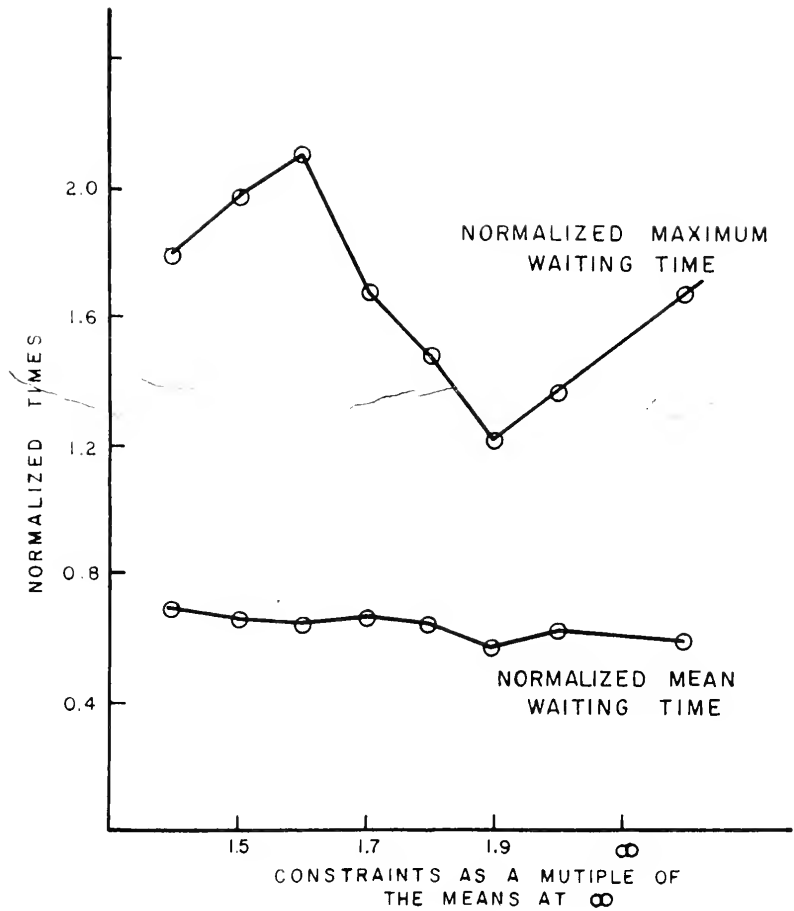
FIGURE 6-5   EFFECT OF SERVICE CONSTRAINTS ON
THE NORMALIZED MEAN AND MAXIMUM
WAITING TIME (FROM REF. 25, P. 5-19)
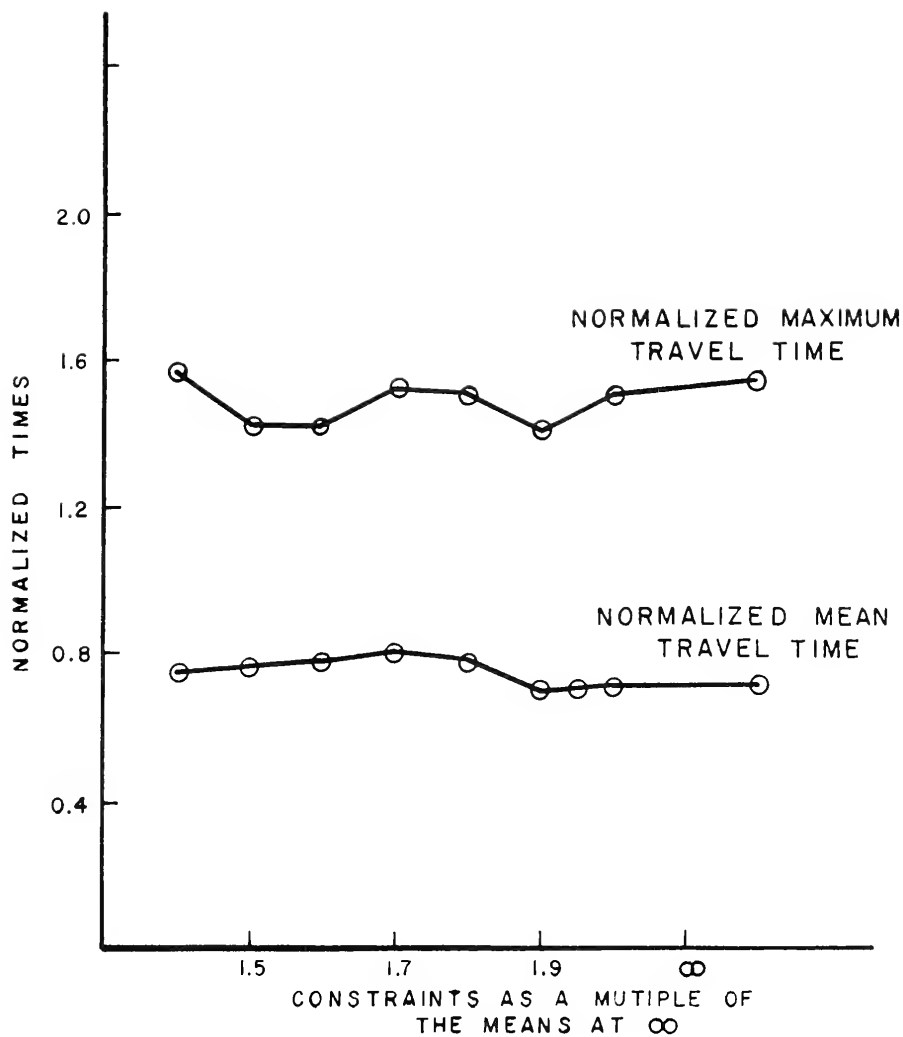
FIGURE 6-6   EFFECT OF SERVICE CONSTRAINTS
ON THE NORMALIZED MEAN AND
MAXIMUM TRAVEL TIME
(FROM REF. 25, P.5-10)
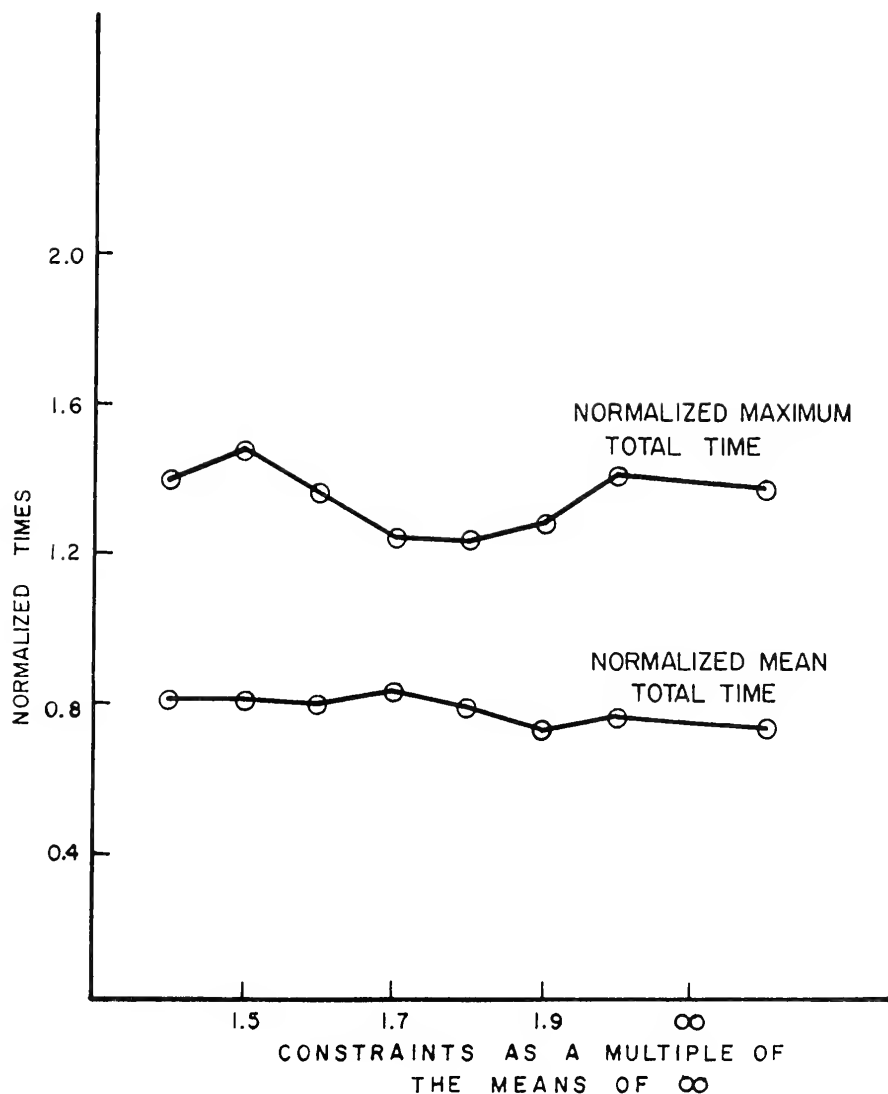
FIGURE 6-7   EFFECT OF SERVICE CONSTRAINTS ON THE
NORMALIZED MEAN AND MAXIMUM TOTAL
TIME (FROM   REF. 25, P. 5-12)

inoperative. This would be expected since in this case the heuristic can make an unconstrained choice of the best assignment which tends to minimize the mean service times. It is also noted in Figures 6-5 and 6-6 that with infinite constraints, both the mean waiting time and the mean travel time have minimum values.

More surprising, however, is the fact that, as seen in Figure 6-6, the normalized maximum total service time with infinite constraints, is not very different from the constrained values. This indicates that the assignment selection criterion considers quality of service to all users to be a desirable attribute. The normalized maximum reflects service to only one passenger and,hence, is not very reliable since this one passenger may have been unusually unlucky.

From these tests it is clear that the selection of the constraint values should depend on the user's preference for low mean or low maximum service times. If the lowest possible means are desired, constraints should be set so high that they are seldom, if ever, invoked.

In this study, to provide low mean service times, the service constraints were set at very high values. The values of the three service constraints are shown below:

1. Waiting time constraint = 999.0 (mins.)
2. Travel time constraint = 9.9 STRGHT + 99.0 (Mins.)
3. Total time constraint = 9.9 STRGHT + 999.0 (mins.)

STRGHT is the time necessary for the vehicle to go from the origin to the destination of the demand.

Priority Classes: The demand for the Dial-A-Ride service is not separated into different priority classes. All customers are given the same priority for service and were generated from one priority class all the time.

Number of Passengers Per Demand: A uniform distribution was assigned to generate the number of passengers per demand. Its lower limit is 1.0 and its upper limit is 2.10. Two passengers per demand, having the same trip origin and destination, is considered to be the maximum expected request for Dial-A-Ride service. For three passengers or more per demand, the passengers will try to use the taxi which would provide a better level of service with approximately the same price under such conditions.

The above distribution produced on the average in the simulation experiments 10% of the calls requesting service for two passengers, which is considered to be reasonable.

Inter-Demand Times: An exponential distribution was used to generate inter-demand time, i.e., time in minutes between requests for service. The mean value of the distribution specifies the demand level of the simulation run. It must be defined as mean minutes/demand implying a change in units from demand/hour.

Access: Access is the extra-vehicular time of a private automobile trip not spent in that vehicle (parking, walking to and from automobile parking lot). It is added to the mean direct travel time to compute the mean measure of service. It was given the value of 4.0 minutes in the simulation experiments.

Initial Demands: The initial demands were assigned arbitrarily to the simulation experiments with different demand levels. They range from 5 to 12 initial demands increasing with the increase of demand levels.

Vehicle Characteristics

The following vehicle characteristics were assumed for all the simulation experiments:

1. Vehicle capacity of 12.

2. Mean vehicle operating speed between stops of 15 m.p.h. or 4.0 minutes per mile.

3. Discrete vehicle location. With discrete vehicle location the algorithm only knows the location of the last stop made by a vehicle. This implies that the algorithm cannot insert a stop before the first stop in a vehicle's projected tour.

4. Stopping time values to both pick up and deliver each passenger are generated from a uniform distribution defined by a lower limit of 0.25 and by an upper limit of 0.5 minutes (28).

5. When the vehicle has no assignment at the end of
    its tour, it is left where it made its last stop.
    It waits there for a new assignment.

Run Characteristics

Complete outputs were requested every 15 minutes in
each of the simulation runs. Statistics were taken for
demands arising between 15 and 120 minutes in each simulation.
The simulation period ends when all the demands arising
between 15 and 120 minutes have been served.

The Simulation Results

The simulation experiments were conducted to provide
the decision maker with the number of Dial-A-Ride vehicles
required in off-peak periods in many-to-many operations in
different environments of demand and level of service. The
results of these experiments, as they were designed to
isolate the effect of each of these three parameters, can be
divided into three major groups.

1. Results pertaining to the number of vehicles
    required under different levels of demand with
    level of service held constant.

2. Results showing the effects of demand levels on
    level of service with the number of buses held
    constant.

3. Results showing the effects of number of buses on
    level of service with the demand level held constant.

The results are all tabulated in Appendix D.

Number of Vehicles

The results of the effect of variation of demand level on the number of vehicles with level of service held constant are shown in Figure 6-8. Figure 6-8 shows that the number of vehicles increases linearly with increasing demand level but with a slope less than unity. These results are better illustrated in Figure 6-9 showing vehicle productivity, which is number of passenger trips per vehicle hour, increases parabolically with increasing demand level. Above 120 demands per hour, the rate of increase in productivity is quite slow and below 30 demands per hour, the system is quite inefficient. In the investigated range, the productivity increased by about 65%.

These results are quite significant when considering the role of Dial-A-Ride system in urban transportation with respect to other competing modes with different vehicle productivity demand relationships such as taxis and fixed-route buses. Taxis show a relatively constant vehicle productivity since they cannot carry more than one demand group at any time. They would be competitive with the Dial-A-Ride system only at very low demand levels. With their less sophisticated control system lower costs may result at similar vehicle productivities. Fixed-route buses, conversely, are well suited to take advantage of the

CONDITION:
MEAN LEVEL OF SERVICE = 2.2 TO 2.3
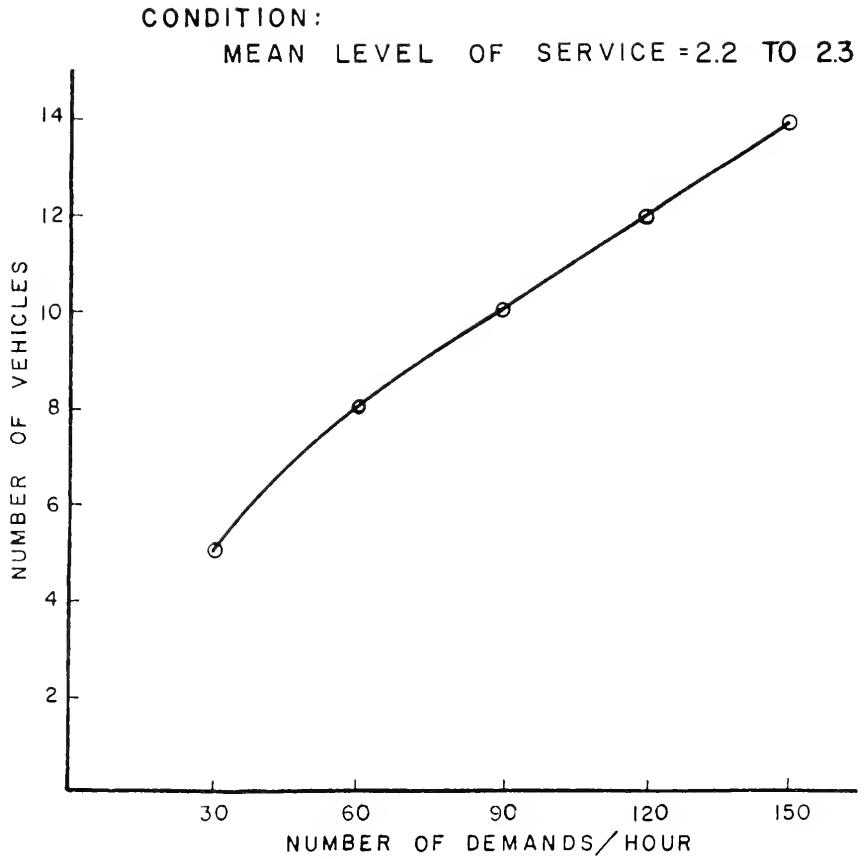
FIGURE 6-8   EFFECT OF DEMAND LEVEL ON
NUMBER OF VEHICLES

CONDITION:
MEAN LEVEL OF SERVICE = 2.2 TO 2.3
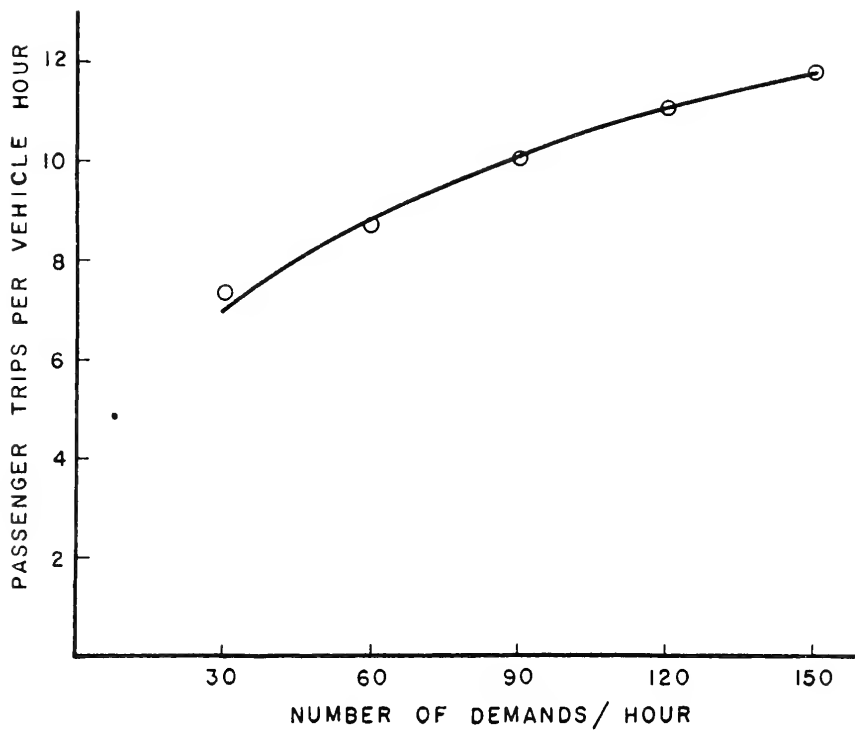
FIGURE 6-9   EFFECT OF DEMAND LEVEL ON
VEHICLE PRODUCTIVITY

economics of scale and their vehicle productivity would continue rising with increasing demand level after the Dial-A-Ride system curve has levelled out. Thus at fairly high demand level, fixed-route buses would be more efficient than DARS. This implies a medium demand level operation would be best for DARS.

The results show an average mean measure of service of about 2.3. To supplement this figure, more additional information is given below.

	Waiting Time (min.)	Travel Time (min.)	Total Time (min.)
Mean	14.5	17.5	32.0
Maximum	46.5	60.0	78.3

The percentage of time the vehicle is unassigned indicates the availability of that vehicle to serve a new demand. This value reflects on the level of service offered to the customers. The results show an average of 1.25 percent of the time the vehicles are unassigned.

Level of Service

The second series of tests investigated the effect on the level of service of varying the demand level while holding the number of buses constant. The results are shown in Figures 6-10 to 6-12.

Figure 6-10 shows that the level of service varies linearly with the demand level but with a slope less than
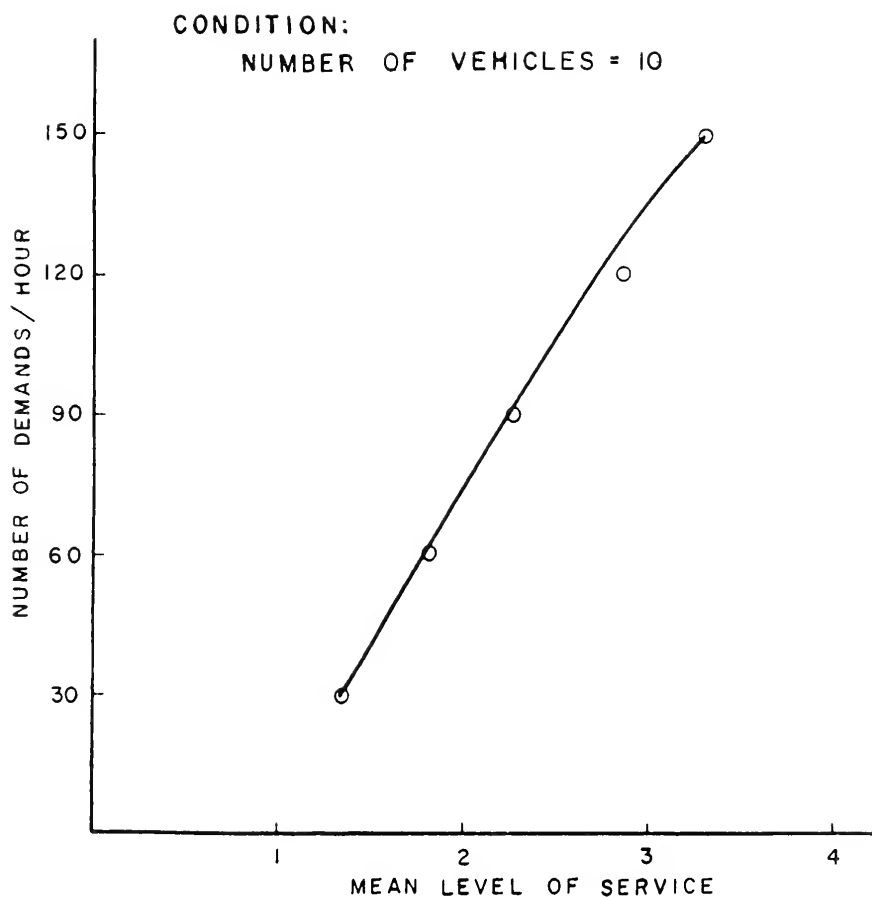
FIGURE 6-10 EFFECT OF DEMAND ON MEAN
LEVEL OF SERVICE
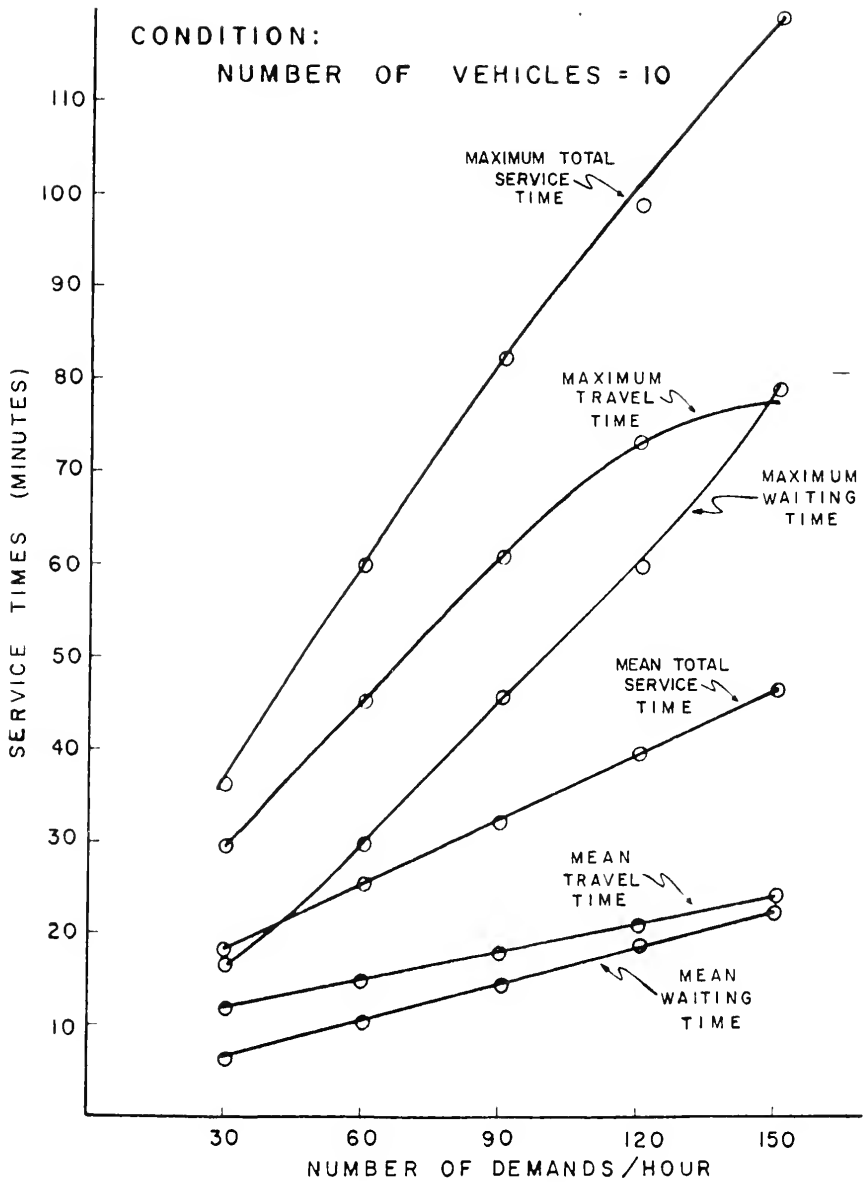
FIGURE 6-11 EFFECT OF DEMAND LEVEL ON MEAN AND MAXIMUM SERVICE TIMES
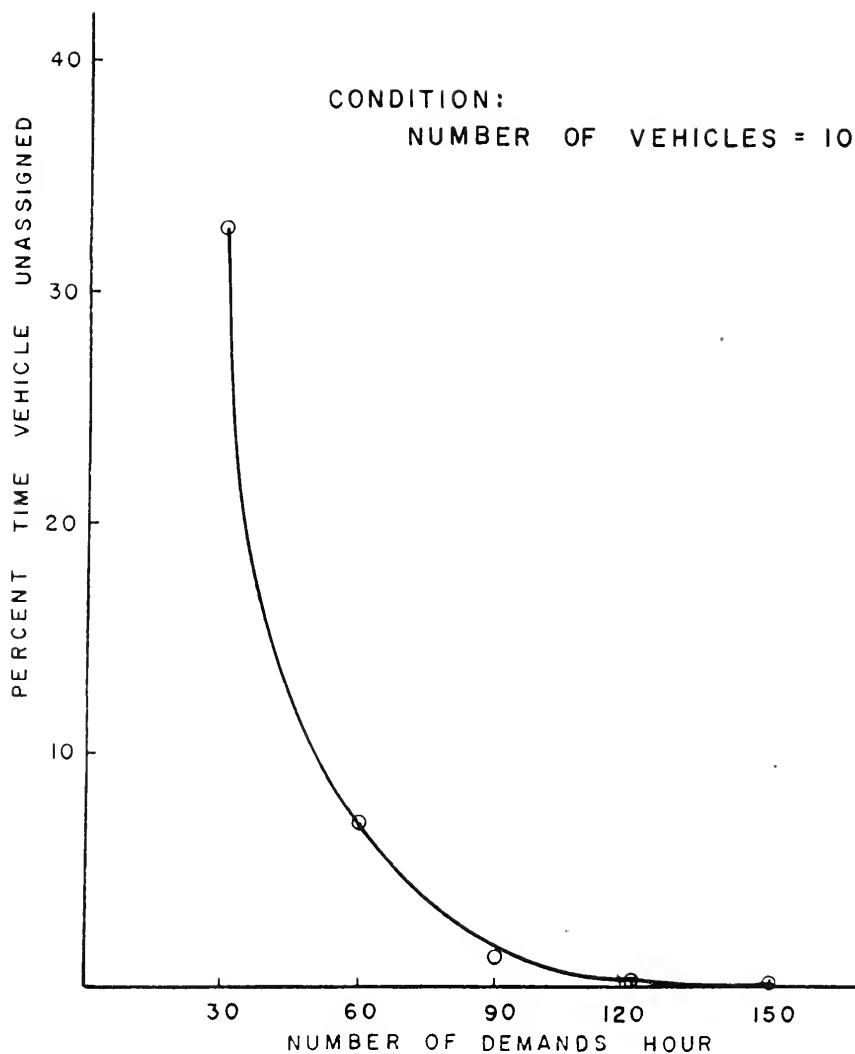
FIGURE 6-12   EFFECT OF DEMAND LEVEL ON
PERCENT TIME VEHICLE
UNASSIGNED

unity. The greater the demand level, the slower is the service provided, i.e., the higher is the mean level of service. It also clearly indicates that to provide a better mean level of service to more customers, more buses should be used.

Figure 6-11 shows the deterioration of the service times, which determines the level of service, with the increase of demand level. Mean and maximum of waiting time, travel time, and total time are plotted against different demand values. The mean service times increase linearly with increase demand levels with slopes less than unity. The rate of increase of mean travel time is less than the rate of increase of mean waiting time, which indicates that at higher demand levels the increase in total service time is due mainly to increase in waiting time of the customer. This is more explicitly shown in the plots of the maximum service times. However, the maximum total time increases to non-acceptable limits with high demand values, even to one passenger.

The variation of the vehicle percent time unassigned with demand levels is shown in Figure 6-12. The curve has a rectangular hyperbolic form with the same number of vehicles. The value of vehicle percent time unassigned drops sharply as the demand increases from 30 to 60 calls per hour and then it levels out at values close to zero at the higher demand levels. It illustrates that a small increase in demand will

keep the vehicles busy and assigned.

The third series of tests investigated the effect on the level of service of varying the number of buses, while holding the demand constant. The results are shown in Figures 6-13 to 6-15.

It is seen from Figure 6-13 that the mean level of service curve has a rectangular hyperbolic curve. As would be expected, the more vehicles used, the faster is the service provided. It is clearly impossible to provide a better mean level of service than 1.0 since this is the direct driving time. It should be added that lower levels of service could be obtained but at a prohibitive cost in terms of the number of vehicles operating.

Conversely, decreasing the number of vehicles below a certain point leads to deterioration in the mean level of service. From these experiments and from other experiments conducted at M.I.T. the best mean measure of service for system operation seems to be between 2.0 and 3.0. However, the actual operating point would be governed by the reaction of the users to different cost/service combinations.

The decomposition of the level of service into its elements of waiting time, travel time, and total time with respect to the variation of number of buses is shown in Figure 6-14. The same trend in service times is seen in this figure as compared to the variation obtained due to changes in demand levels. The decrease in number of buses
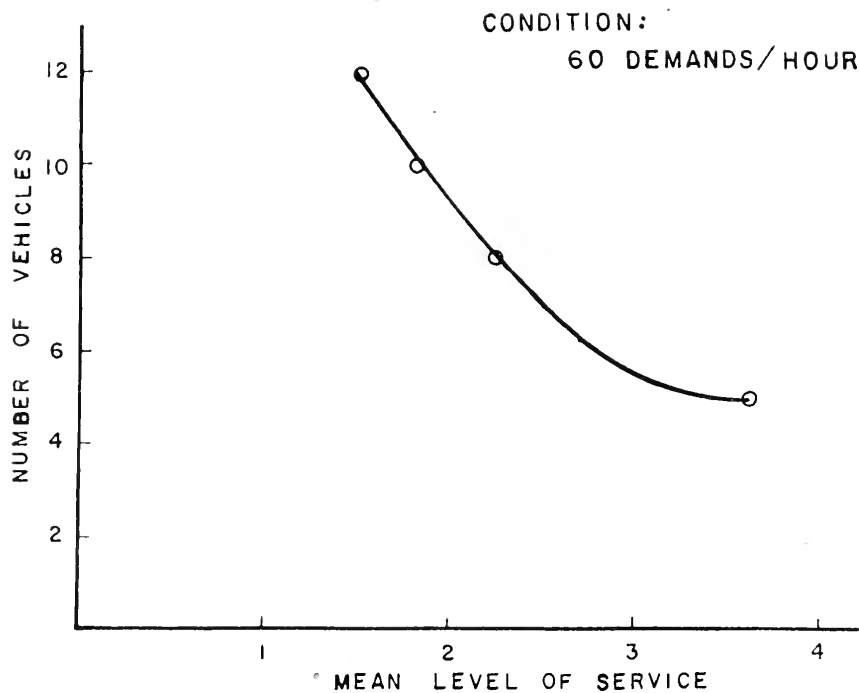
FIGURE 6-13 EFFECT OF NUMBER OF VEHICLES
ON MEAN LEVEL OF SERVICE
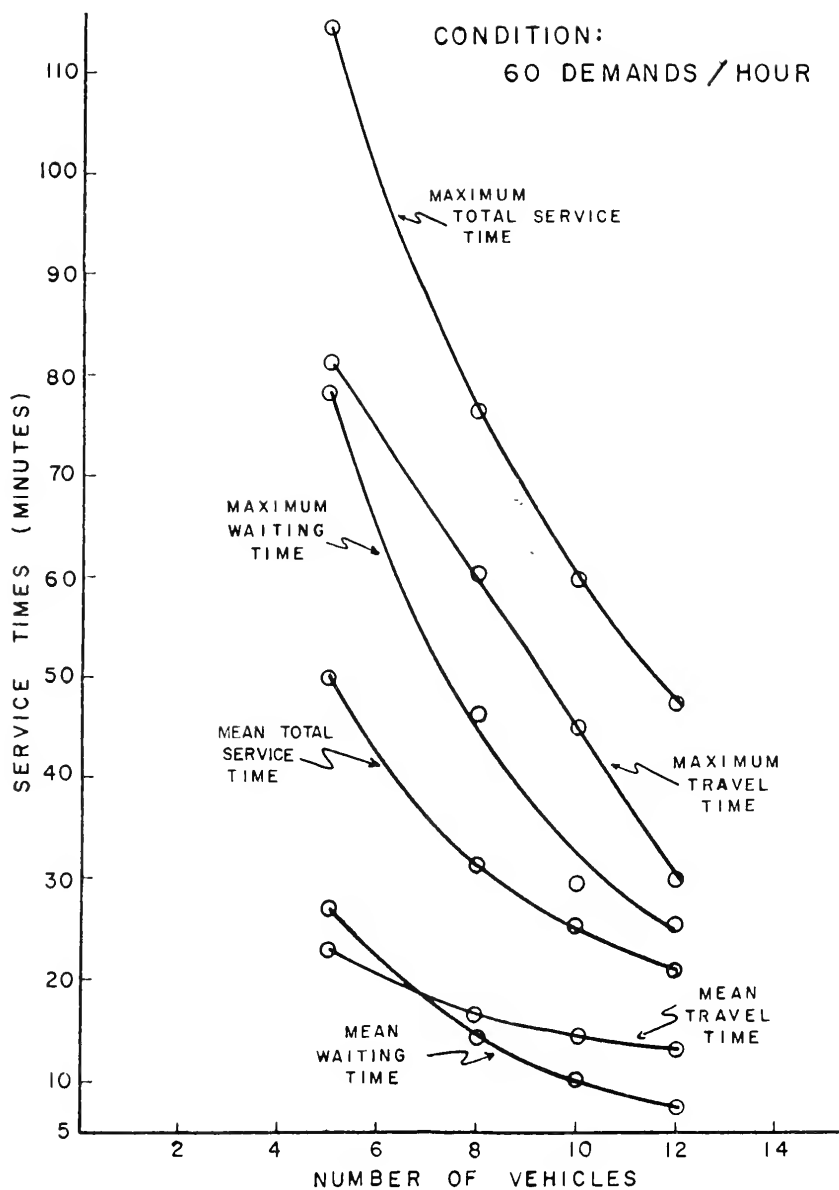
FIGURE 6-14 EFFECT OF NUMBER OF VEHICLES ON MEAN AND MAXIMUM SERVICE TIMES
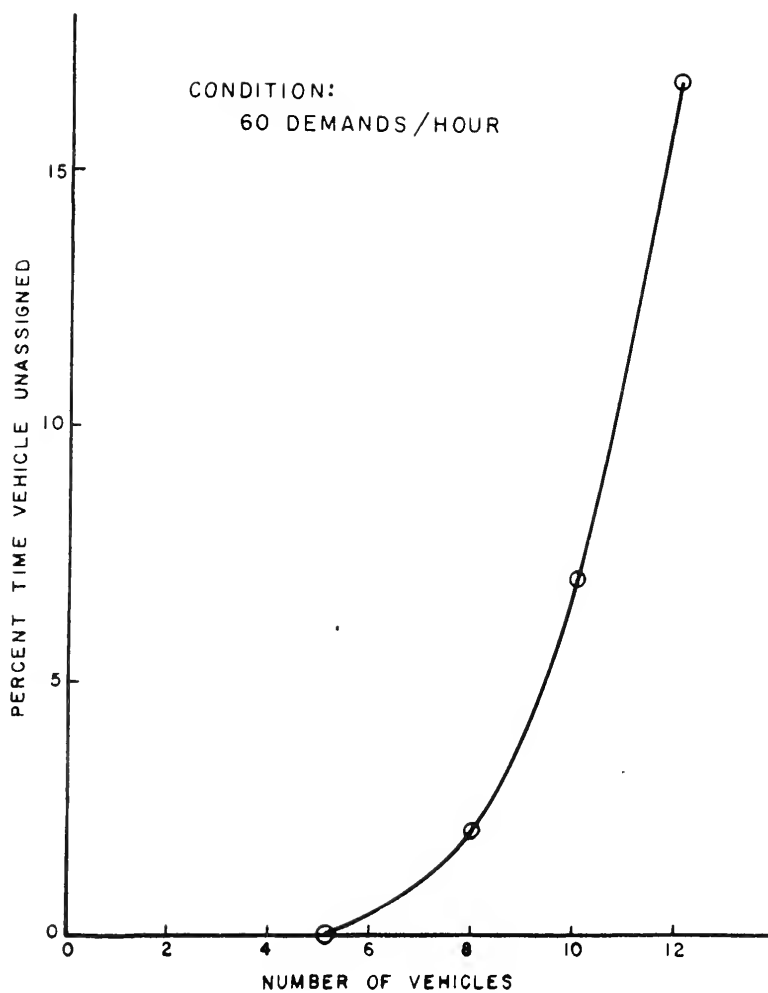
FIGURE 6-15   EFFECT OF NUMBER OF VEHICLES ON THE PERCENT TIME VEHICLE UNASSIGNED

seems to have a similar general effect on service times as the increase in demand. Hence, the same interpretation could apply to the above results. The effect of number of buses on the percent time vehicle unassigned is also shown in Figure 6-15. The curve varies less rapidly with the decrease of number of buses than with the increase of demand.

Trip Length

The computer program calculates the mean level of service for the different trips by trip lengths. There are five divisions of trip lengths. The effect of number of buses and number of demands per hour on mean level of service by trip lengths is shown in Figures 6-16 and 6-17.

It is interesting to note from these figures that the mean level of service is better for longer trips within the study area under the same conditions. This could be interpreted by studying the definition of level of service. The level of service for a certain trip is the summation of waiting time plus the bus travel time divided by the mean direct travel time.

$$LOS = \frac{\text{Waiting time + travel time}}{\text{Mean direct travel time}} = \frac{\text{Total Service time}}{\text{Mean direct travel time}}$$

For short trips the waiting time constitutes a major element of the total time. Travel time by bus being close to the direct travel time produces a large numerator compared to the denominator and hence, a high value of
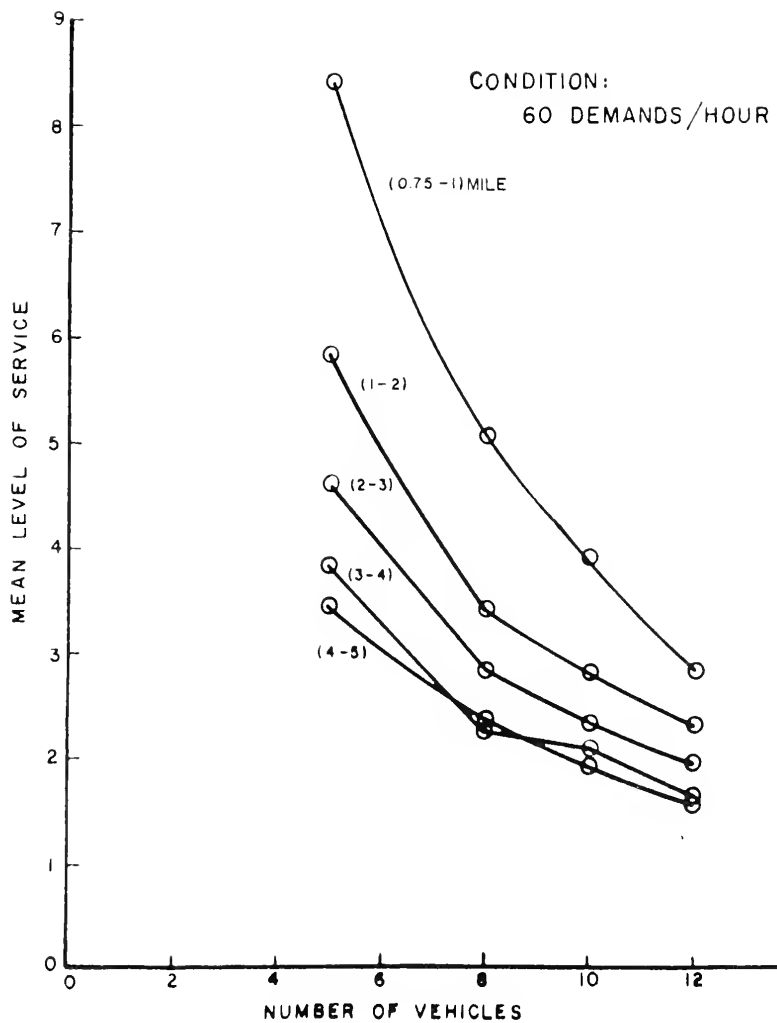
FIGURE 6-16   EFFECT OF NUMBER OF VEHICLES ON
MEAN LEVEL OF SERVICE BY TRIP
LENGTH
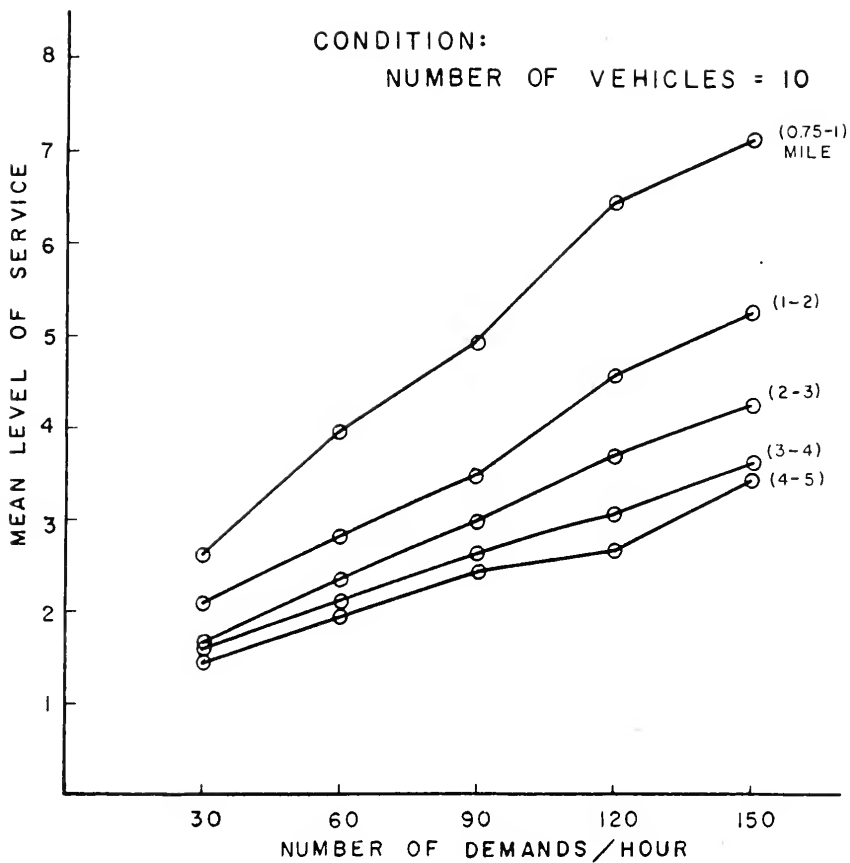
FIGURE 6-17   EFFECT OF DEMAND LEVEL ON
MEAN LEVEL OF SERVICE BY
TRIP LENGTH

level of service. This effect decreases as the trip length increases. The waiting time is independent of the effect of trip length and approximately uniform in value. The travel time increases with the increase of trip length and consequently forms the major part of the total time. Being close in value to the direct travel time, it produces, on the whole, a lower value of level of service.

It can, therefore, be concluded that under the same conditions, the Dial-A-Ride system best serves trip lengths of 2 to 5 miles within the study area.

CHAPTER 7:   COST ANALYSIS

Introduction

The cost analysis will determine the feasibility of
operation of the two bus modes under different demand
levels at a required level of service. The mean level of
service that is considered to be acceptable to the public,
as discussed previously is equal to 2.2 to 2.5 times the
mean direct auto travel time. The cost analysis of the
different operations was investigated at this measure of
level of service. But the measure of service for the two
bus systems is not quite the same except from the time
consumption point of view. The demand-responsive bus
system in contrast to the fixed-route bus system offers a
door-to-door service with confortable waiting times and no
walking is involved. It offers a better service to the
customers even where the time·spent by the users on both
systems is the same. However the importance of walking to
the bus stop and waiting on the streets is rather a
qualitative measure and it is hard to incorporate in
calculating the measure of service. This research
considered the total time spent by the users on the system
as the only measure for comparing the levels of service
offered by the two bus alternatives.

The cost of a bus system will depend mainly on the number of buses in operation. The drivers' wages and the operating cost of the vehicles constitute the major component of the total system cost. In case of demand-responsive bus systems, the cost of dispatching and the cost of computer assignment will add another component to the total cost. Before the cost of the two systems is studied, the number of buses required to serve the various demand levels will be discussed first.

Analysis of the Results of the Two Bus Systems

The design of the two bus systems, which are studied in Chapters 5 and 6 reveals the number of buses needed to serve the various demand levels for a certain level of service. The results are tabulated below for a 2.2 to 2.5 mean level of service.

Demand Per hour	Number of Buses	Type of System
up to 750*	15	Fixed-Route
150	14	Dial-A-Ride
120	12	Dial-A-Ride
90	10	Dial-A-Ride
60	8	Dial-A-Ride
30	5	Dial-A-Ride

*750 = Available passenger seats per hour

It is seen from the above results that for a demand greater than 150 persons per hour, the fixed-route bus system requires less number of buses than the Dial-A-Ride to provide the same level of service. Consequently its cost will be cheaper than Dial-A-Ride because of its less sophisticated control systems. The high demands, those greater than 150 persons per hour, occur during the peak hours of the day in Greater Lafayette Area. Therefore the fixed-route system provides a better alternative during these hours.

For demand less than 150 persons per hour, the Dial-A-Ride system requires less than 15 buses to provide the same level of service. However the total system cost could be less, equal, or greater than that of the fixed-route system, depending on the number of Dial-A-Ride buses in operation. This is mainly due to the additional administrative and operative cost required by the Dial-A-Ride system The cost analysis investigated the break-even point between the cost of the two systems. The break-even point represents the number of Dial-A-Ride buses in operation that would produce the same total cost as the 15 buses in the fixed route system. Below that number of buses the Dial-A-Ride system would provide a better alternative than the fixed-route system.

Hence, the cost analysis investigated the operating cost per hour of the following systems:

1. A 15 bus system operating on the developed fixed
    routes of Greater Lafayette Area.

2. A number of Dial-A-Ride buses that would be
    equivalent in cost to the fixed-route system.

The costs for such common items between the two
systems, as land cost, terminal facilities costs, and
common administrative costs are not considered in the
analysis. It is difficult to calculate their costs per
hour and they might obscure the total operating costs.
Besides they don't offer any valuable information for the
comparison of the two systems which is the main purpose of
the analysis.

Cost Analysis of the Fixed-Route System

The following vehicle characteristics and operating
conditions are assumed in calculating the cost of the
fixed-route system.

Vehicle	25-30 passenger seats Twin Coach Type - Gasoline
Operating Conditions	12 mph Average speed (inc. stops) 12 Hrs/Day 144 miles/Day 365 Days/Year 52500 miles/Year 4380 hours/year

The 12 hours per day cover the non-peak operating hours
of the system. It is already established that the fixed-
route system is a better alternative during the peak hours.
During the non-peak hours the choice between the two bus
systems will depend on their cost comparison.

The total operating cost of the fixed-route system is summarized in the following table.

Purchase Cost of 15 buses: $506,000; Capital Recovery cost assuming a 10-year life expectancy, at an 8% interest rate	$75450/year	$1.72/hour
Purchase Price of 15 Two-Way Radio units with a base station: $25,000; Capital Recovery cost at 8% interest rate assuming replacement every 10 years	$ 3725/year	$0.85/hour
Fixed Radio Maintenance charges 15 mobile units at $6 each per month 1 Base unit at $12 per month	$ 1224/year	$0.28/hour
Insurance, 15 buses insured at $700 each	$ 1050/year	$0.24/hour
Wages 15 Drivers at $3.20 per hour plus 10% unemployment taxes, social securities and workman compensation plus 5% Medication, Life Insurance and Driver Uniforms	$3.20/hour/driver $0.32/hour/driver $0.16/hour/driver $3.68/hour/driver $3.68 x 15	$55.20/hour
Fuel at 16.9¢/gallon at 4.425 miles/gallon and at 12 miles/hour	$0.46/hour/vehicle	$ 6.90/hour
Oil at 65¢/gallon 6 Quarts of oil every month	$15.00/month	$0.04/hour
Maintenance Including Tires, Battery, Antifreeze, Transmission Fluid and Grease	$ 3300/year	$0.75/hour
Total Cost		$65.98/hour

The cost figures were obtained from Greater Lafayette Public Transportation Corporation. The administration costs and the mechanics wages were not included in the analysis since they are common to the operations of both systems.

Cost Analysis of the Dial-A-Ride System

The following vehicle characteristics and operating conditions are assumed in the cost analysis:

Vehicle	12-15 passenger seats Compact mini-bus (Gasoline)
Operating Conditions	Many-to-many, Computer scheduling, Manual-voice communications 12 mph average speed (inc. stops) 12 hrs/day 144 miles/day 365 days/year 52500 miles/year 4380 hours/day

In the Dial-A-Ride operation, the vehicle could be empty and unassigned for a certain time, depending upon the demand level and the number of vehicles in operation. For a 2.2 to 2.3 level of service, it is found from the simulation experiments that the average percent time the vehicle is unassigned is 1.25%. During this unassinged time the vehicle would be waiting at its last stop for a new assignment. This idle time, although it is small, will cut down on the total miles traveled and on the fuel consumption.

The dial-A-Ride system would require a telephone operator, a dispatcher, a computer, and public telephone lines in addition to that needed for the operation of the

fixed-route system. The computer cost is estimated to be equal to 10¢ per trip by the M.I.T. researchers (23). But the number of trips that can be processed at the required level of service cannot be evaluated, without knowing the number of buses in operation. However, a mathematical relationship could be developed between the demand level and the number of vehicles, for a 2.2 to 2.3 level of service. From the results of the simulation experiments shown in Figure 6-8 the number of buses increases linearly with the increase of number of demands for demands greater than 60 calls per hour. This could be represented by the following function for number of buses greater or equal to 8.

$$D = 60 + 15 (N-8) = 15N - 60$$

where

D is the number of demands per hour

N is the number of vehicles in operation

The following table summarizes the total operating cost of the system according to the stated assumptions.

Purchase cost of N buses at $ 10,000 each; Capital Recovery cost assuming a 3-year life expectancy at an 8% interest rate	$3880N/year	$0.89N/hour
Purchase cost of N two-way radio units: $1,400N; a base station $4,000; Capital Recovery cost at 8% interest rate assuming replacement every 10 years	($209N+596)/year	(0.0476N+ 0.136)/hour

Installation cost of 25
Direct-Public Telephone
Lines: $750; Capital
Recovery cost at 8%
interest rate assuming
replacement every 5 years $187.5/year $0.0428/hour

Monthly cost of 25 direct-
public telephone lines at
$14.50 each $362.5/month $1.01/hour

Fixed Ratio Maintenance
Charges N mobile units at
$6 each per month; 1 Base   6N
unit at $12 per month   12
                      (6N+12)/month, (0.0167N+0.033)/
                                        hour

Insurance
N buses insured at $700 each $700N/year $0.16N/hour

Computer cost at 10¢ per
trip for (15N-60) demands
per hour $(1.5N-6.0)/
                                  hour

Wages
N Drivers at $3.68/hour each $3.68N/hour
1 Dispatcher at $3.80/hour $3.80/hour
1 Additional operator at
$3.68/hour $3.68/hour

Fuel at 16.9¢/gallon
at 8.55 miles/gallon
at 12 x 1.0125 miles/hour $0.241/hour/vehicle
                                    $0.241N/hour

Oil at 65¢/gallon
6 Quarts of oil every month $1.00N/month $0028N/hour

Maintenance
Including Tires, Battery,
antifreeze, transmission
fluid, and Grease $220N/year $0.05N/hour

                Total Cost $6.5881N + 2.7018/hour

     The cost figures were also obtained from Greater

Lafayette Public Transportation Corporation.

The total cost per hour should be equal to the total cost per hour of the fixed route system.

6.5881N + 2.7018 = 65.98

$$N = \frac{63.28}{6.588} = 9.65 = 10 \text{ buses}$$

Hence 10 buses of the Dial-A-Ride system would produce the equivalent cost of 15 buses operating on the fixed-route system. The demand served by 10 buses would be equal to 90 calls per hour for the required level of service. Therefore the Dial-A-Ride system would provide a better alternative for demands less or equal to 90 calls per hour.

CHAPTER 8:   CONCLUSIONS AND RECOMMENDATIONS

Conclusions

The research developed a methodology for the design
of fixed routes of a bus system in a small urban area.
Using this methodology it identified the best route
configuration of the fixed-route bus system to be
implemented in Greater Lafayette Area. A fifteen bus,
seven leg, three two-way loop system is considered to be
the best developed system. The medium size buses operate
on half-hour headways to provide a mean level of service
of 2.3 to 2.5 times the mean direct travel time. No cut
in service of the selected system is recommended because
the level of service would deteriorate rapidly to undesirable
limits.

The research also investigated the number of Dial-A-
Ride buses required to satisfy demands of 30 to 150 calls
per hour for different levels of service. For a 2.2 to
2.3 mean level of service it is found that the number of
buses increases linearly with increasing demand level but
with a slope less than unity. At the same level of service
the rate of increase in vehicle productivity is quite slow
for demands above 120 calls per hour. This implies that
Dial-A-Ride would best operate in medium and low demand

levels. In studying both the effect of demand level on level of service and the effect of number of buses on level of service it was clearly shown that to provide a better mean level of service to more customers, more buses should be used. The study has also concluded that the Dial-A-Ride system best serves trip lengths of 2 to 5 miles within the Greater Lafayette Area.

The results obtained from this study also identify the best operation in Greater Lafayette Area for the two bus modes, the fixed-route and the Dial-A-Ride for the different demand levels at a required level of service. These results are tabulated below:

Condition: Level of Service=(2.2 to 2.5) x Auto Travel Time

Demands/Hour	No. of Buses	Type of Bus System
91-750	15	Fixed-Route
90	10	Dial-A-Ride
60	8	Dial-A-Ride
30	5	Dial-A-Ride

From these results it can be concluded that the fixed-route system provides a better bus system for high demands, while Dial-A-Ride offers a better and less costly service for low demands. This conclusion is valid only when the concept of level of service as defined earlier, is used as a yardstick for comparison between the two

systems. In other words, if the time spent by the users on the bus system compared to their auto travel time is used as a measuring criteria.

The results are applicable specifically to the Greater Lafayette Area. However, if other areas have the same size and structure as Greater Lafayette, the results might be used.

The study has confined its analysis to the many-to-many form of the Dial-A-Ride system. Other forms such as many-to-few and many-to-one have not been investigated. In addition manual dispatching instead of computer dispatching has not been considered. It could be a more viable form of dispatching at very low demands. Yet its effect on the level of service should be well investigated especially in a large size area as Lafayette with many-to-many form of operation.

Recommendations for Further Research

This research is a pioneer in the field of comparing the two bus modes, the fixed-route and the demand-responsive bus systems that are most likely to be considered in small urban areas. Additional research is needed in this field and some of the research ideas are listed below:

1. To compare the two bus modes for different area sizes and different area structures.

2. To determine the importance of walking to and
    waiting at bus stops by the users with respect
    to their total travel time by bus.

3. To investigate the waiting time distributions
    of fixed-route bus users for different bus head-
    ways and area coverage.

4. To study the advantages and the disadvantages of
    implementing a many-to-few instead of many-to-
    many Dial-A-Ride system in low demand hours.

5. To study the effects of manual dispatching vs
    computer dispatching on the levels of service
    offered by the Dial-A-Ride system. This could
    not be studied, until a computer dispatching
    system is in operation, which is non-existent
    till this date.

Recommendations for Implementation

The proper hourly distribution of demand is hard to
predict before implementing the bus systems. Hence it is
difficult to find before hand the right combination of the
two bus modes for the different operating hours of the day.
Since the fixed-route system is a better system for high
demands it is always safe to start by implementing it
during the whole operating hours for at least 3 to 6
months. When enough and stabilized information on the
demand distribution is obtained, then a decision on the

application of the two bus systems for the different operating hours could be reached using the results of this research.

LIST OF REFERENCES

LIST OF REFERENCES

1. Bruggeman, J. M., and Heathington, K. W., "Sensitivity to Various Parameters of a Demand-Scheduled Bus System Computer Simulation Model," Highway Research Board, Highway Research Record 293, 1969.

2. Cantor, Kenneth P., The Environmental Handbook, Ballantine Books, Inc., 1970, pp. 197-198.

3. Fertal, M., Weiner, E., Balek, A., and Sevin, A. F., Modal Split, U. S. Department of Transportation, Federal Highway Administration, December, 1966.

4. Fitch, Lyle, C., The Future of American Transportation, The American Assembly, Columbia University, 1971, pp. 169-170.

5. Guenther, Karl, "Incremental Implementation of Dial-A-Ride Systems," Highway Research Board; Special Report 124, 1971, p. 52.

6. Guenther, K. W., and Oxley, P. R., Dial-A-Ride for New Towns, Transportation Research and Planning Office, Ford Motor Company, October, 1970.

7. Hanson, Mark E., Ed., Project Metran - An Integrated Evolutionary Transportation System for Urban Areas, Massachusetts Institute of Technology, Report No. 8, 1966.

8. Heathington, K. W., et. al, "Computer Simulation of a Demand-Responsive Bus System Offering Door-to-Door Service", 47th Annual Meeting of the Highway Research Board, Highway Research Record, No. 251.

9. Heathington, K. W., et. al., The Greater Lafayette Area Bus Transit Study, Purdue University, Joint Highway Research Project, April, 1971.

10. Howson, Larry L., and Heathington, Kenneth W., Algorithms for Routing and Scheduling in Demand Responsive Transportation Systems, General Motors Research Laboratories, January, 1970.

11. Johnson, Lyndon B., _Transportation For America_, A Message from the Prssident of the United States to the Congress, March 2, 1966.

12. Kennedy, John F., _The Transportation System of Our Nation_, A Message from the President of the United States to the Congress, April 5, 1962.

13. Levinson, Herbert S., et. al., _Traffic Management for Bus Priorities_, Wilbur Smith and Associates, January 22, 1973.

14. Mowbray, A. Q., _Road to Ruin_, J. B. Lippincott Company, 1969, p. 240.

15. Mowbray, A. Q., _Road to Ruin_, J. B. Lippincott Company, 1969, p. 232.

16. Nixon, Richard M., National Defense Transportation Day and National Transportation Week, _Proclamation 4041_, March 31, 1971.

17. Rapp, Mathias H., and Cohner, Claus D., _Criteria for Bus Rapid Transit Sysems in Urban Corridors: Some Experiments with an Interactive Graphic Design System_, Urban Systems Research Center, University of Washington, Seattle, April, 1973.

18. Roberts, Kenneth R., _Vehicle Scheduling and Driver Run Cutting_, the MITRE Corporation, September, 1971.

19. Roos, Daniel, et. al., _Summary Report: The Dial-A-Ride Transportation System_, Massachusetts Institute of Technology, Urban Systems Laboratory, USL TR-70-10, March, 1971, pp. 4-14.

20. Smerk, George M., _Readings in Urban Transportation_, Indiana University Press, 1968.

21. Smerk, George M., _Readings in Urban Transportation_, Indiana University Press, 1968, p. 315.

22. Smerk, George M., et. al., _Mass Transit Management: A Handbook for Small Cities_, Institute for Urban Transportation, Indiana University, February, 1971.

23. Stafford, J. et. al., _Economic Considerations for Dial-A-Ride_, Massachusetts Institute of Technology, Urban Sysems Laboratories, USL TR-70-11, March, 1971, p. 1-2.

24. Voorhees, Alan M., and Associates, Inc., A System
    Analysis of Transit Routes and Schedules, Mass
    Transportation Demonstration Project INT-MTD-14,
    November, 1969.

25. Wilson, Nigel H. M., et. al., Scheduling Algorithms
    for a Dial-A-Ride System, Massachusetts Institute
    of Technology, Urban Systems Laboratory, USL TR-70-13,
    March, 1971.

26. Wilson, Nigel H. M., et. al., Simulation of a Computer
    Aided Routing System, Massachusetts Institute of
    Technology, Urban Systems Laboratory, R70-16,
    January 1970.

27. Dial-A-Ride Basic Program Documentation, Massachusetts
    Institue of Technology, Urban Systems Laboratory,
    December, 1970.

28. CARS Basic Program Implementation and User's Guide,
    Massachusetts Institute of Technology, Urban Systems
    Laboratory, December, 1970.

General References

Acres, H. G. Limited, Guelph Transit Study, Guelph, Ontario, Canada, May 1971.

Bauer, H. J., A case Study of a Demand-Responsive Transportation System, General Motors Research Publication, No.1034, Sept. 1970.

Bendix Corporation, Columbia Transit Study, Mass Transportation Demonstration Project, MD-MTD-2, April 1970.

Bonsall, J. A., The Bay Ridges Dial-A-Bus Experiment, Department of Highway, Ontario, Jan. 1971.

Bruch, H., et. al., Topics in the Design of Dial-A-Ride Demonstration Experiments, Urban Systems Laboratory, M.I.T. Cambridge, Mass., Dept. RT-70-12, March 1971.

Gustafson, R. L., et. al., User Preferences for a Demand-Responsive Transportation System: A Case Study Report, General Motors Research Publication, No. 7047, Jan. 1971.

Jones, P. S., 1964, Dial-A-Bus, Proceedings, Stanford Research Institute Urban Alternatives Symposium - Stanford Research Institute.

Read, Voorhees, and Associates, Stratford Transit System, Stratford, Canada, Jan. 1972.

Voorhees, Alan M. and Associates, Inc., A Transit Development Program for Spokane, City of Spokane, Washington, May 1970.

Roos, D., et. al., Cars - A Prototype Dial-A-Bus System, Urban Systems Laboratory, M.I.T., Cambridge, Dept. R69-56, Sept. 1969.

Ward, J. E. and Rausch, R. G., Vehicle Communications for a Dial-A-Ride System, USL TR-70-15, M.I.T., Cambridge, March, 1971.

A Manual Backup System Handbook for Dial-A-Ride, USL, M.I.T., Cambridge, July 1971.

Computer Configurations for a Dial-A-Ride System, USL TR-70-14, M.I.T., Cambridge, March 1971.

Dial-A-Bus, Ontario Department of Transportation and Communications, Ontario, Canada, Aug. 1971.

APPENDICES

APPENDIX A

Appendix A reports the calculation of the level of service of the fixed-route bus system. Table A-1 shows the cumulative frequency of a zone for being a source of origin and a source of destination for a particular demand. Table A-2 shows the level of service for 50 demands for a walking and waiting time of 15 and 20 minutes. The level of service for 30 minutes walking and waiting time could be calculated as follows:

$$2.78 + (2.78 - 2.35) \frac{(30-20)}{(20-15)} = 3.64$$

Figure A-1 shows the desire lines of travel for the 50 demands.

TABLE A-I   TRAFFIC ZONE CUMULATIVE FREQUENCIES OF CONTAINING ORIGINS AND DESTINATIONS

Number Of Zone	Number Of Total Employees	Number Of Working Force*	Cumulative Frequency Of Being A Zone Of Origin	Cumulative Frequency Of Being A Zone Of Destination
001	4968	190	0-5	0-146
002	2237	620	6-22	147-212
003	414	380	23-32	213-224
100	25	922	33-58	225-225
101	1108	44	59-60	226-258
102		764	61-80	
103		750	81-100	
104		484	101-113	
105		826	114-135	
106		828	136-157	
107		500	158-171	
108	2527	96	172-174	259-332
109	479	224	175-180	333-346
110	605			347-364
200	94	842	181-203	365-367
201		666	204-221	
202		392	222-231	368-397
203	1033			
204		384	232-247	
205		430	248-259	
206		566	260-274	
207	132	602	275-290	398-401
208		1060	291-319	
210	1515	250	320-329	402-446
211	746			447-468
212		360	330-339	
213	145			469-472
214		400	340-350	
300		496	351-363	
301		626	364-380	
302		870	381-404	
303		764	405-425	
304		482	426-438	
305		638	439-455	
306		776	456-476	
310				473-519
311				520-536
312				537-606
313	299			607-615
314	312	1338	477-517	616-624
315		1966	518-570	
316		1650	571-615	
317	1351			625-664
318	270			665-672
320	205			673-678
400	288	866	616-638	679-686
401		548	639-653	
402		740	654-673	
403		642	674-690	
411		240	691-696	
412		292	697-704	
500	767			687-709
501	621	1492	705-744	710-727
502	6405			728-915
504	50			916-916
510		800	745-766	
511		360	767-776	
512		300	777-784	
513		300	785-792	
514	205	1200	793-825	917-922
600		1012	826-852	
601		834	853-875	
602		800	876-897	
603		462	898-910	
604		378	911-920	
605		380	921-930	
606		642	931-947	
608	937			923-950
609	163	600	948-961	951-955
610		708	962-978	
611		840	979-996	
612	1537	100	997-1000	956-1000

*Number of working force = Total population - number of people less than 18 years old - number of people equal and greater than 62 years old.

TABLE A-2 LEVEL OF SERVICE OF THE FIXED-ROUTE BUS SYSTEM

Number of Event	Origin Zone	Destination Zone	Travel Time By Bus	Travel Time By Auto	Travel Time By Auto +40 Minute Access Time	Travel Time By Bus +15 Minute Walking & Waiting Time	Level of Service	Travel Time By Bus +20 Minute Walking & Waiting Time	Level of Service
1	609	002	30	14.30	18.30	45	2.46	50	2.73
2	511	312	35	16.90	20.90	50	2.39	55	2.63
3	104	211	22	7.80	11.80	37	3.13	42	3.55
4	316	312	7	3.90	7.90	22	2.78	27	3.41
5	501	320	30	16.90	20.90	45	2.15	50	2.39
6	212	502	30	16.90	20.90	45	2.15	50	2.39
7	100	312	18	9.10	13.10	33	2.51	38	2.90
8	200	210	10	6.50	10.50	25	2.38	30	2.85
9	106	002	15	7.80	11.80	30	2.54	35	2.96
10	603	001	15	7.80	11.80	30	2.54	35	2.96
11	610	310	32	18.20	22.20	47	2.11	52	2.34
12	316	002	22	9.62	13.62	37	2.76	42	3.14
13	610	001	20	13.00	17.00	35	2.05	40	2.35
14	316	502	33	16.64	20.64	48	2.32	53	2.56
15	315	001	23	13.00	17.00	38	2.23	43	2.53
16	206	501	17	10.92	14.92	32	2.14	37	2.48
17	305	200	10	5.20	9.20	25	2.71	30	3.26
18	612	210	40	21.32	25.32	55	2.17	60	2.37
19	202	312	18	7.80	11.80	33	2.79	38	3.22
20	603	310	32	15.60	19.60	47	2.39	52	2.65
21	400	612	30	16.90	20.90	45	2.15	50	2.39
22	314	502	22	14.56	18.56	37	1.99	42	2.26
23	402	001	6	5.20	9.20	21	2.28	26	2.82
24	504	608	17	11.44	15.44	32	2.07	37	2.39
25	107	311	27	12.48	16.48	42	2.54	47	2.85
26	315	500	25	14.30	18.30	40	2.18	45	2.46
27	303	108	23	11.70	15.70	38	2.42	43	2.73
28	316	502	33	16.64	20.64	48	2.32	53	2.56
29	600	211	22	10.92	14.92	37	2.47	42	2.81
30	105	001	10	6.50	10.50	25	2.38	30	2.85
31	306	001	10	7.80	11.80	25	2.11	30	2.54
32	600	101	15	3.90	7.90	28	3.54	33	4.45
33	402	109	18	13.00	17.00	33	1.94	38	2.23
34	107	317	38	16.90	20.90	53	2.53	58	2.77
35	303	002	6	5.20	9.20	21	2.28	26	2.82
36	306	101	15	10.40	14.40	30	2.08	35	2.43
37	400	108	16	10.40	14.40	31	2.15	36	2.50
38	403	502	16	10.40	14.40	31	2.15	36	2.50
39	511	001	12	7.80	11.80	27	2.28	32	2.71
40	602	203	16	9.10	13.10	31	2.36	36	2.74
41	102	108	6	5.20	9.20	21	2.28	26	2.82
42	303	608	30	18.20	22.20	45	2.02	50	2.25
43	205	502	18	11.70	15.70	33	2.10	38	2.42
44	401	502	13	6.76	10.76	28	2.60	33	3.06
45	602	002	10	6.50	10.50	25	2.38	30	2.85
46	315	210	30	13.00	17.00	45	2.64	50	2.94
47	100	502	13	7.80	11.80	28	2.37	33	2.79
48	400	310	13	8.84	12.84	28	2.18	33	2.57
49	602	608	11	7.80	11.80	26	2.20	31	2.62
50	202	502	15	10.40	14.40	30	2.08	35	2.43
					Average		2.35		2.78
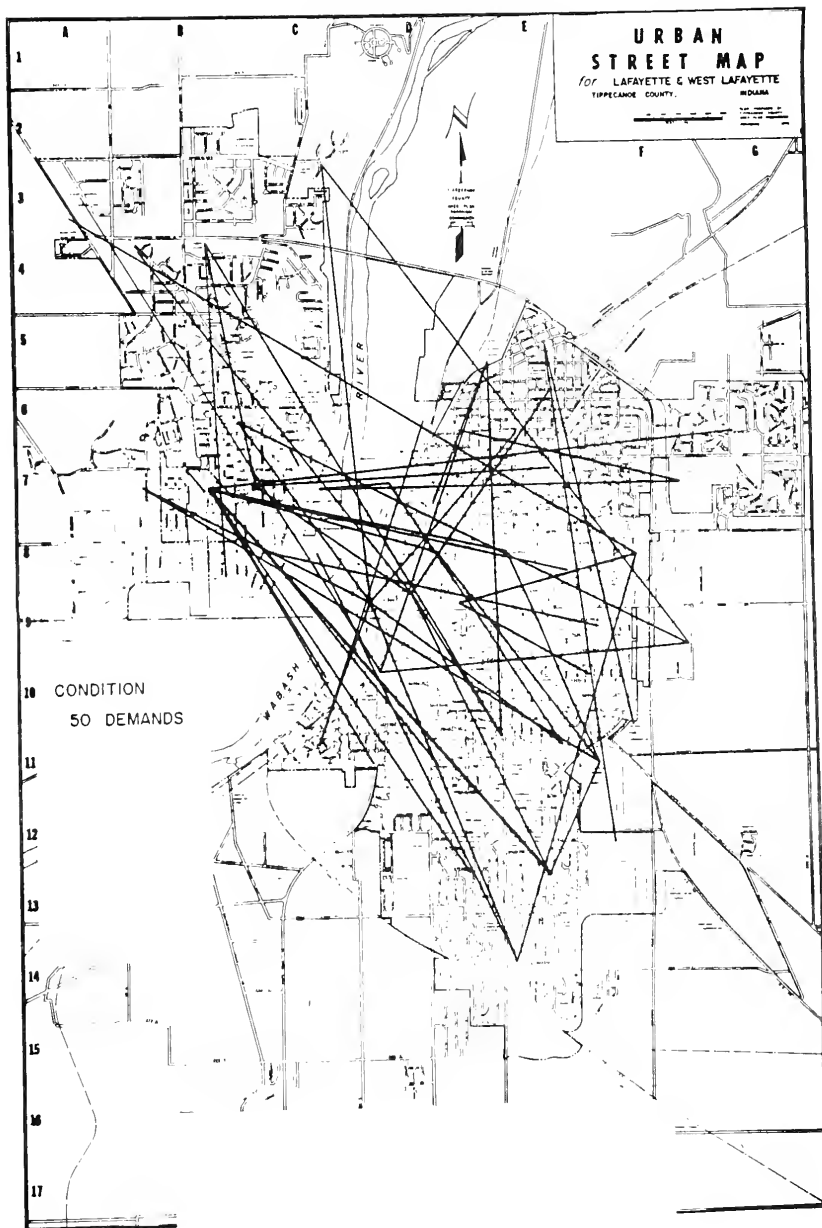
FIGURE A-I DESIRE LINES OF TRAVEL OF THE
FIXED-ROUTE SIMULATION

APPENDIX B

This appendix shows a sample of the input and output data of the Dial-A-Ride computer simulation. Explanatory information on the output data is provided and has been taken from the Basic Program Implementation and User's Guide of the computer simulation package.

TABLE B-I A SAMPLE OF INPUT DATA

```
DATA STARTS HERE
01    0    00.0
   14    20    20    12    12
  0-1     4    00
   0   14  12   4.0 0.01   15.  120.   00.0
  0.75   1.3   4.0
  1      65741  1.0
 999.   9.9  99.   9.9 999.
   0.0   0.0   12   0.0
   0  0  0   00.   15.   00.0
  0  01212
DISTRIBUTIONS START HERE
    65729    1
    65759    1
    65771    1
    65789    1
    65897    1
    65735   -1
    65791    1
    65807    1
    65747    1
    65819    1
    65847    1
    65863    1
  1  0.000  1.000  1
  1  0.000  1.000  2
  1  0.000  1.000  3
  1  0.000  1.000  4
  1  1.000  2.100  5
  3  0.400  0.000  6
  1  0.250  0.500  7
  1  0.250  0.500  8
  6  1.000  0.000  9
  1  0.000  1.00010
  1  0.000  1.00011
  1  0.000  1.09012
GEOGRAPHICS START HERE
    6.5   1
    1
   48
 0.00 2.75 0.90 3.20 15 10
 0.50 2.75 0.88 3.20  0  0
 0.88 2.75 1.32 3.20 15  5
 1.32 2.75 1.65 2.97  0  0
 1.32 2.97 1.65 3.20 15 40
 1.07 3.20 1.65 3.65 25 10
 0.75 3.20 1.07 3.65 25140
 0.00 3.20 0.75 3.75 40 20
 0.00 3.75 0.35 4.93  0  0
 0.35 3.75 0.75 4.15  0  0
 0.75 3.65 1.65 4.15 20 10
 0.35 4.15 1.65 4.93 30 15
 0.00 4.93 0.35 5.05 10  5
 0.35 4.93 1.25 5.13 20 40
 1.25 4.93 1.65 5.55 20  5
 0.00 5.05 0.35 5.55  5  5
 0.35 5.13 1.25 5.55 20  5
 0.00 1.78 1.32 2.75  0  0
 0.00 0.85 1.75 1.78  0  0
 0.00 0.00 2.22 0.85  0  0
 1.32 2.47 1.65 2.75  0  0
 1.32 1.78 1.65 2.47 25 10
 1.75 0.85 2.22 1.76 20 10
 1.85 1.49 1.85 1.45 15 20
 2.22 0.00 3.17 1.37 80 30
 3.17 0.00 4.60 0.85  0  0
 3.17 0.85 3.75 1.78  5  5
 3.75 0.85 4.60 3.20  0  0
 3.80 1.37 3.80 1.57 30 60
 2.22 1.37 3.17 1.78 20 20
 3.05 1.45 3.05 1.45 10 40
 2.22 1.78 3.50 3.68230 70
 3.00 3.55 3.00 3.55 10 60
 3.50 1.78 3.75 3.55 20 60
 1.65 1.78 2.22 2.75 40 15
 1.65 2.75 2.00 3.10 40200
 2.00 2.75 2.22 3.10 20 15
 1.65 3.10 2.22 3.33 20 15
 1.65 3.33 2.00 3.76  0  0
 2.00 3.33 2.22 3.76 20  5
 1.65 3.76 2.22 4.20  0  0
 2.22 3.63 3.75 4.20 90 25
 1.65 4.20 2.60 4.63  0  0
 2.60 4.20 2.60 4.63  5  5
 2.60 4.20 3.30 4.63 20  5
 3.30 4.20 4.60 5.55  0  0
 1.65 4.63 3.30 5.55  0  0
 3.75 3.20 4.60 4.20 20 10
```

OUTPUT DATA

a)   FULL STATISTICAL OUTPUT

Most of the information provided in a full statistical output is self explanatory. The "normalized" quantities are calculated by dividing the quantity by its corresponding constraint and then averaging over all demands (or passengers).

The "weighted normalized" mean times are obtained by summing the total times and dividing by the sum of the total time constraints for all demands (or passengers).

Note that the "weighted normalized" quantities weight the longer trips more heavily than the shorter trips while the "normalized" quantities weight them all equally.

Level of service is defined in the context of this basic program as the total system time (waiting time plus travel time) divided by the direct automobile travel time. The Measure of Service is defined as the total system time divided by the sum of the direct automobile travel time and the variable ACCESS that is read in on Line 6.

Vehicle productivity is the average number of passengers served per hour over the entire run for all vehicles.

If the number of passengers/demand is not 1, statistics taken "by demand" should be different than those taken "by passenger".

b) SYSTEM STATUS DUMP

This is easily interpreted once the abbreviations are understood. In the active demand list:

DN - demand number (becomes negative when a demand is delivered)

OX,OY - coordinates of the origin of the demand

DX,DY - coordinates of the destiation of the demand

PC - number of passengers ("passenger content") in the demand

PRTY - priority class of the demand

DTIME - time that the demand arose

DPTIME - time that the demand was picked up (if DPTIME = 0.0, the demand has not yet been picked up)

In the vehicle tour list:

DN - demand associated with this stop

TX,TY - coordinates of this stop

P - if stop is a pickup, this is the pointer to the corresponding delivery stop. If stop is a delivery, pointer is set to -1.

TIME - expected arrival time at this stop

CONST - link constraint (negative if a constraint on this link, or further down the route, is violated).

TABLE B-2 A SAMPLE OUTPUT OF THE COMPUTER SIMULATION RUNS

RUN NUMBER 2 WITH   0 BLOCKS OF HISTORY
PROBABILITY FUNCTIONS
DISTRIBUTION   A   SEED

THE TRAVEL LENGTH DISTRIBUTION CONSISTS OF 4 STEPS OF
THE WEIGHTING FACTORS RELATING THE CHOICE OF A GIVEN STEP ARE

THE AREA IS DIVIDED INTO 4M ZONE)
THE ZONE COORDS AND THEIR RELATIVE PROBABILITIES OF CONTAINING ORIGINS AND DESTINATIONS AREO

TONY 10/30/72

SIMULATION INPUT DATA

VEHICLE CHARACTERISTICS

10 VEHICLES OF CAPACITY   12
SPEED0 4.00 (MINUTES PER MILE)

AREA CHARACTERISTICSO

4.6 BY 5x5 MILE AREA

TABLE B-2 (Cont.)

30 DEMANDS PER HOUR

THERE ARE   1 DISPATCHING POINTS AND   0 DISTINCT DESTINATIONS

SERVICE CHARACTERISTICS0

0.5 MINUTES PICKUP AND DELIVERY TIME PER PASSENGER
THERE ARE   1 PROBABILITIES OF SERVICE
THE PROBABILITY SEED USED TO GENERATE PRIORITY CLASSES 150
65741

FOR PRIORITY CLASS   10
999.0 WAITING-TIME CONSTRAINT (MINS)
9.9.9.9 ASSIGNMENT +999.0 TRAVEL TIME CONSTRAINT (MINS)
DEMANDS IN THIS PRIORITY CLASS ARE GENERATED 1.000 FRACTION OF THE TIME

OUTPUT CHARACTERISTICS0

15.0 COMPLETE OUTPUT (MINS)
15.0 INTERMEDIATE OUTPUT (MINS)
70.0 SIMULATED PERIOD (MINS)

ALGORITHM OPTIONS SPECIFIED0

STATISTICS WILL BE TAKEN FOR DEMANDS ARISING BETWEEN   15. AND   75. (MINS)

ACCEPTABLE DEMANDS
OBJECTIVE FUNCTION(S)

65729   1

65759   1

65771   1

65789   1

65897   1

65735 -1

65791   1

65807   1

65747   1

65819   1

65847   1

65863   1

DISPATCHING POINTS
X-COORDINATE Y-COORDINATE RELATIVE WEIGHT
1.00   1.00

MAXIMUM NUMBERS ALLOWED DURING COURSE OF RUN0

VEHICLES	DISPATCHING POINTS	STATIONS	SEEDS	DISTRIBUTIONS
10	20	20	12	12

					SEEDS	DISTRIBUTIONS
INITIAL LOCATION FOR VEHICLE 1	(X,Y)	UNITS			287	275
INITIAL LOCATION FOR VEHICLE 2	(X,Y)	UNITS			319	357
INITIAL LOCATION FOR VEHICLE 3	(X,Y)	UNITS			162	91
INITIAL LOCATION FOR VEHICLE 4	(X,Y)	UNITS			204	365
INITIAL LOCATION FOR VEHICLE 5	(X,Y)	UNITS			167	301
INITIAL LOCATION FOR VEHICLE 6	(X,Y)	UNITS			193	100
INITIAL LOCATION FOR VEHICLE 7	(X,Y)	UNITS			55	538
INITIAL LOCATION FOR VEHICLE 10	(X,Y)	UNITS			300	334

TABLE B-2 (Cont.)

SYSTEM STATUS AT TIME   60.000 FOR RUN   2

ACTIVE DEMAND LIST

DN	QX	QY	PC	PRTY	DTIME		DN	QX	QY	PC	PRTY	DTIME		DN	QX	QY	PC	PRTY	DTIME
19	184	300	354	1	58.23		16	300	354	1		46.08							49.89
21	145	341	276	1	56.33		24	172	307	1		56.05							56.92
22	136	500	275	1	0.0		28	246	317	1		52.67							58.92
20		170	270	0	0.0							54.83							58.92

VEHICLES AND EQUIP LISTS.   CONST   DN   TX   TY   TY   P   TIME   CONST   DN   TX   TY   P   TIME   CONST

VEHICLE 1 LAST POSITION X 473 AT 1.30.03, CURRENT CONTENTS 0, CURRENT TOUR FOLLOWS.
AVERAGE EARLINESS -0.158, AVERAGE LATENESS   12.29.

VEHICLE 2 LAST POSITION X 279 AT 52.15, CURRENT CONTENTS 0, LAST STOP MADE AT   50.98.
AVERAGE EARLINESS -0.163, AVERAGE LATENESS   3.487, CURRENT TOUR FOLLOWS.

VEHICLE 3 LAST POSITION X 145 AT 58.54, CURRENT CONTENTS 1, LAST STOP MADE AT   58.23.
AVERAGE EARLINESS -1 71.02 204.62, AVERAGE LATENESS   1.687, CURRENT TOUR FOLLOWS.

VEHICLE 4 LAST POSITION X 426 AT 57.18, CURRENT CONTENTS 2, LAST STOP MADE AT   56.76.
AVERAGE EARLINESS 0.618, AVERAGE LATENESS   1.166, CURRENT TOUR FOLLOWS.

VEHICLE 5 LAST POSITION X 122 AT 52.03, CURRENT CONTENTS 2, LAST STOP MADE AT   58.72.
AVERAGE EARLINESS -0.332, AVERAGE LATENESS   1090.330, CURRENT TOUR FOLLOWS.

VEHICLE 6 LAST POSITION X 266 AT 54.25, CURRENT CONTENTS 0, LAST STOP MADE AT   47.74.
AVERAGE EARLINESS 1118 62.75, AVERAGE LATENESS   0.23 275.30, CURRENT TOUR FOLLOWS.

VEHICLE 7 LAST POSITION X 252 AT 59.35, CURRENT CONTENTS 1, LAST STOP MADE AT   58.92.
AVERAGE EARLINESS -1 71.75 209.30, AVERAGE LATENESS   0.0, CURRENT TOUR FOLLOWS.

VEHICLE 8 LAST POSITION X 195 AT 52.57, CURRENT CONTENTS 0, LAST STOP MADE AT   54.26.
AVERAGE EARLINESS 1450 204.24, AVERAGE LATENESS   1.057, CURRENT TOUR FOLLOWS.

VEHICLE 9 LAST POSITION X 242 AT 58.03, CURRENT CONTENTS 1, LAST STOP MADE AT   59.63.
AVERAGE EARLINESS 1335 58.63, AVERAGE LATENESS   1.627, CURRENT TOUR FOLLOWS.

VEHICLE 10 LAST POSITION X 44 AT 59.57, CURRENT CONTENTS 0, LAST STOP MADE AT   55.36.
AVERAGE EARLINESS -1 62.56, AVERAGE LATENESS   0.467, CURRENT TOUR FOLLOWS.

TABLE B-2 (Cont.)

INTERMEDIATE I/O AT TIME =   60.000 FOR RUN   2

COMPOSITE VEHICLE AVERAGE CONTENTS= 0.28 AND PER CENT TIME EMPTY= 58.37, PER CENT TIME UNASSIGNED= 48.32
27 DEMANDS REPRESENTING 27 PASSENGERS HAVE OCCURRED WITH AN AVERAGE DISTANCE 1.74 BETWEEN ORIGIN + DESTINATION.
24 PICKUPS AND   24 INDIVIDUAL DELIVERIES HAVE BEEN MADE LEAVING   10 DEMANDS CURRENTLY ON THE SYSTEM.
THE OVERALL WEIGHTED LEVEL OF SERVICE IS 4.35 1.52 WITH A VARIANCE OF 0.151

STATISTICS FOR DEMANDS IN PRIORITY CLASS   1 0

COMPOSITE STATISTICS FOR 10 DEMANDS AND   10 PASSENGERS0
THE WEIGHTED LEVEL OF SERVICE IS 1.41

	WAITING TIME	BY DEMAND TRAVEL TIME	TOTAL TIME	WAITING TIME	BY PASSENGER TRAVEL TIME	TOTAL TIME
MEAN	3.744	9.000	12.744	3.944	8.000	12.744
VARIANCE0 MEAN	4.647	9.992	15.294	4.647	9.992	15.294
WEIGHTED NORMALIZED MEAN	0.004	0.045	0.012	0.004	0.045	0.012
NO. OF CONSTRAINT VIOLATIONS	0	0	0	0	0	0
NORMALIZED VIOLATION TIME	0.0	0.0	0.0	0.0	0.0	0.0
MINIMUM	0.67	1.944	0.944			
NORMALIZED MAXIMUM	1.206	3.219	19.944			
AVERAGE DEVIATION IN PICKUP TIMES	0.808	0.061	3.817			
AVERAGE DEVIATION IN DELIVERY TIMES	0.126	VARIANCE	0.006			

AVERAGE DEVIATION IN PICKUP TIMES 1.145, VARIANCE 1.426
AVERAGE DEVIATION IN DELIVERY TIMES 3.311 VARIANCE 3.422
THE MEAN TRAVEL RATIO 1.030

THE MEAN MEASURE OF SERVICE (WITH ACCESS = 4.00 MIN.) IS 0.98 WITH A MAXIMUM VALUE OF 1.34 , A VARIANCE OF 0.03 .
AND A R.M.S. MEASURE OF SERVICE OF 0.99

STATISTICS BY TRIP LENGTHS (IN MILES)

TRIPS	0-1	1-2	2-3	3-4	4-5	5-
	2	4	2	2	0	0
MEAN LEVEL OF SERVICE (VARIANCE)	1.76 0.019	1.75 0.115	1.36 0.018	1.00 0.001	0.0 0.0	0.0
MEAN WAITING TIME (VARIANCE)	2.63 2.041	1.59 1.696	8.78 8.968	3.33 2.253	0.0 0.0	0.0 0.0
MEAN TRAVEL RATIO (VARIANCE)	1.12 0.016	1.21 0.086	0.82 0.003	0.79 0.003	0.0 0.0	0.0 0.0

THE VEHICLE PRODUCTIVITY FOR THE ENTIRE RUN IS   2.70
THE VEHICLE PRODUCTIVITY DURING THE STATED TIMES IS 2.67
1 PAIRS PER DEMAND HAVE BEEN GENERATED

TABLE B-2 (Cont.)

187

FULL I/O AT TIME   60.000 FOR RUN   2

VEHICLE STATISTICS

NUMBER	AVERAGE CONTENTS - MAXIMUM	I TIME EMPTY	PICKUPS	DELIVERIES	UNASSIGNED TIME PER CENT	MAX	I TIME OFF SERVICE
1	0.17	3.59			51.97	40.43	0.0
2	0.19	93.32	3	2	51.35	18.43	0.0
3	0.29	75.05	3	2	41.07	26.63	0.0
4	0.15	65.59	1	1	47.23	37.56	0.0
6	0.14	82.73	1	1	57.03	57.03	0.0
8	0.19	85.36	3	3	36.05	31.16	0.0
10	0.19	80.32	2	3	68.76	31.16	0.0
	0.37	30.37		6	9.25	5.55	0.0

COMPOSITE VEHICLE AVERAGE CONTENTS= 0.26 AND PER CENT TIME EMPTY= 58.37, PER CENT TIME UNASSIGNED= 48.32
27 DEMANDS REPRESENTING 27 PASSENGERS HAVE OCCURRED WITH AN AVERAGE DISTANCE 1.74 BETWEEN ORIGIN + DESTINATION.
THE MEAN OF THE INDIVIDUAL VEHICLE DEVIANCE TIMES 1.52 WITH A VARIANCE OF 0.151
THE OVERALL WEIGHTED LEVEL OF SERVICE IS 1.41

STATISTICS FOR DEMANDS IN PRIORITY CLASS   1 0

COMPOSITE STATISTICS FOR 10 DEMANDS AND   10 PASSENGERS0
THE WEIGHTED LEVEL OF SERVICE IS 1.41

	WAITING TIME	BY DEMAND TRAVEL TIME	TOTAL TIME	BY PASSENGER TRAVEL TIME	TOTAL TIME
MEAN	3.944	8.800	12.744	8.800	12.744
VARIANCE	4.847	0.982	15.294	8.802	15.294
WEIGHTED NORMALIZED MEAN	0.004	0.046	0.012	0.046	0.012
NORMALIZED VIOLATIONS	0.0	0.0	0.0	0.0	0.0
MAXIMUM	8.167	14.941	19.944		
MINIMUM	1.204	3.519	5.865		
NORMALIZED MAXIMUM	0.072	0.028	0.007		
NORMALIZED MINIMUM	0.009				
AVERAGE DEVIATION IN PICKUP TIMES 1.345 ,VARIANCE 1.426					
AVERAGE DEVIATION IN DELIVERY TIMES 3.171 ,VARIANCE 3.422					
THE MEAN TRAVEL RATIO IS 1.029					

THE MEAN MEASURE OF SERVICE (WITH ACCESS = 4.00 MIN.) IS 0.98 WITH A MAXIMUM VALUE OF 1.34 , A VARIANCE OF 0.03 .
AND A R.M.S. MEASURE OF SERVICE OF 0.49

STATISTICS BY TRIP LENGTHS (IN MILES)

TRIPS	0-1	1-2	2-3	3-4	4-5	5-
	2	4	2	2	0	0
MEAN LEVEL OF SERVICE (VARIANCE)	1.269 0.219	1.115	1.318	1.001	0.0	0.0
MEAN WAITING TIME (VARIANCE)	2.63 0.041	3.49 1.896	6.78 0.988	3.33 2.253	0.0 0.0	0.0 0.0
MEAN TRAVEL RATIO (VARIANCE)	1.12 0.016	1.21 0.086	0.82 0.003	0.79 0.003	0.0 0.0	0.0 0.0

THE VEHICLE PRODUCTIVITY FOR THE ENTIRE RUN IS   2.70
THE VEHICLE PRODUCTIVITY DURING THE STATED TIMES IS   2.67
1 PAIRS PER DEMAND HAVE BEEN GENERATED

APPENDIX C

This appendix shows the Dial-A-Ride simulation zones, their demographic characteristics, their coordinates, their relative probability weights of containing origins and destinations , and the desire lines of travel for 60 demands per hour for the different simulation runs.
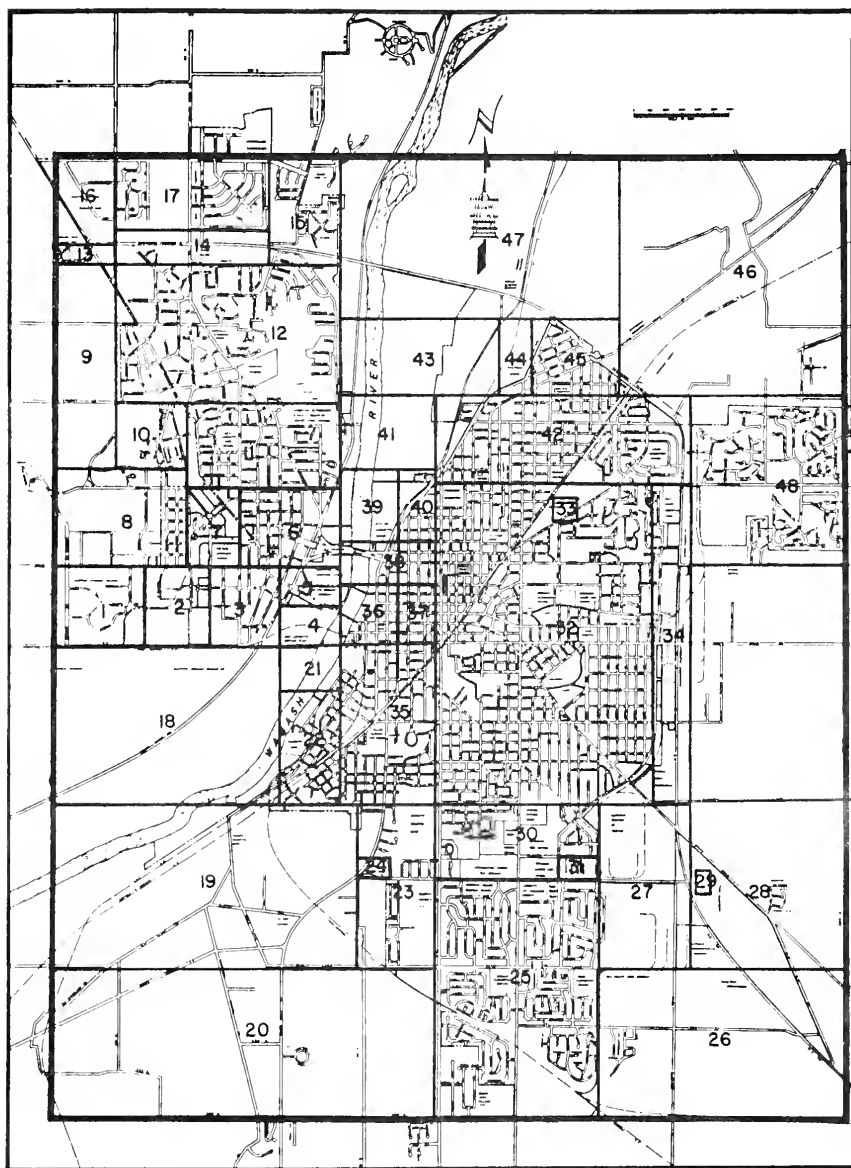
FIGURE C-1 DIAL-A-RIDE SIMULATION ZONES

TABLE C-I   DEMOGRAPHIC CHARACTERISTICS OF THE SIMULATION ZONES

Zone Number	Number of Dwelling Units	Total Population	Number of People Older Than 62	Number of Dwelling Units With ≤1 Car	Number of Dwelling Units With ≥2 Cars	Number of Employees
1	1243	3254	4			
3	2300	2800	120			
5						767
6	1400	2600	400	1074	326	
7						6405
8	7261	10027	43			
11	800	2221	311	520	280	
12	1256	3624	378	580	676	
13	243	504	20	170	73	163
14						937
15	829	1590	170	450	379	
16						1537
17	625	1848	45	250	375	
22	300	1050	90	220	80	11
23	237	938	58	180	57	
25	2661	9829	245	1450	1211	
27						3725
29						500
31						300

TABLE C-1   (Cont.)

Zone Number	Number of Dwelling Units	Total Population	Number of People Older Than 62	Number of Dwelling Units With ≤1 Car	Number of Dwelling Units With ≥2 Cars	Number of Employees
32	6491	17280	2909	4500	1991	1033
33						
34						4443
35	1120	3643	503	800	320	4968
36	326	319	64	316	10	2237
37	405	800	200	355	50	414
38	293	632	98	263	30	1108
40	296	760	111	240	56	479
42	2309	6604	877	1850	459	3032
44						
45	327	919	192	250	77	
48	480					
2,10,24,30	Zones Having No Demographic Data					
4,9,18-21,26, 28,39,41,43, 46,47	Void Zones					

TABLE C-2   SIMULATION ZONE COORDINATES AND THEIR RELATIVE PROBABILITIES OF CONTAINING ORIGINS AND DESTINATIONS

Zone Number	Coordinates of the Lower Left Corner		Coordinates of the Upper Right Corner		Relative Probability of Being an Origin Zone	Relative Probability of Being a Destination Zone
	X	Y	X	Y		
1	0.00	2.75	0.50	3.20	15	10
2	0.50	2.75	0.88	3.20	0	0
3	0.88	2.75	1.32	3.20	15	5
4	1.32	2.75	1.65	2.79	0	0
5	1.32	2.79	1.65	3.20	15	40
6	1.07	3.20	1.65	3.65	25	10
7	0.75	3.20	1.07	3.65	25	140
8	0.00	3.20	0.75	3.75	40	20
9	0.00	3.75	0.35	4.93	0	0
10	0.35	3.75	0.75	4.15	0	0
11	0.75	3.65	1.65	4.15	20	10
12	0.35	4.15	1.65	4.93	30	15
13	0.00	4.93	0.35	5.05	10	5
14	0.35	4.93	1.25	5.13	20	40
15	1.25	4.93	1.65	5.55	20	5
16	0.00	5.05	0.35	5.55	5	5
17	0.35	5.13	1.25	5.55	20	5
18	0.00	1.78	1.32	2.75	0	0

TABLE C-2 (Cont.)

Zone Number	Coordinates of the Lower Left Corner		Coordinates of the Upper Right Corner		Relative Probability of Being an Origin Zone	Relative Probability of Being a Destination Zone
	X	Y	X	Y		
19	0.00	0.85	1.75	1.78	0	0
20	0.00	0.00	2.22	0.85	0	0
21	1.32	2.47	1.65	2.75	0	0
22	1.32	1.78	1.65	2.47	25	10
23	1.75	0.85	2.22	1.78	20	10
24	1.85	1.45	1.85	1.45	15	20
25	2.22	0.00	3.17	1.37	80	30
26	3.17	0.00	4.60	0.85	0	0
27	3.17	0.85	3.75	1.78	5	5
28	3.75	0.85	4.60	3.20	0	0
29	3.80	1.37	3.80	1.37	30	60
30	2.22	1.37	3.17	1.78	20	20
31	3.05	1.45	3.05	1.45	10	40
32	2.22	1.78	3.50	3.68	230	70
33	3.00	3.55	3.00	3.55	10	60
34	3.50	1.78	3.75	3.55	20	60
35	1.65	1.78	2.22	2.75	40	15
36	1.65	2.75	2.00	3.10	40	200
37	2.00	2.75	2.22	3.10	20	15

TABLE C-2 (Cont.)

Zone Number	Coordinates of the Lower Left Corner		Coordinates of the Upper Right Corner		Relative Probability of Being an Origin Zone	Relative Probability of Being a Destination Zone
	X	Y	X	Y		
38	1.65	3.10	2.22	3.33	20	15
39	1.65	3.33	2.00	3.76	0	0
40	2.00	3.33	2.22	3.76	20	5
41	1.65	3.76	2.22	4.20	0	0
42	2.22	3.68	3.75	4.20	90	25
43	1.65	4.20	2.60	4.63	0	0
44	2.60	4.20	2.80	4.63	5	5
45	2.80	4.20	3.30	4.63	20	5
46	3.30	4.20	4.60	5.55	0	0
47	1.65	4.63	3.30	5.55	0	0
48	3.75	3.20	4.60	4.20	20	10

195
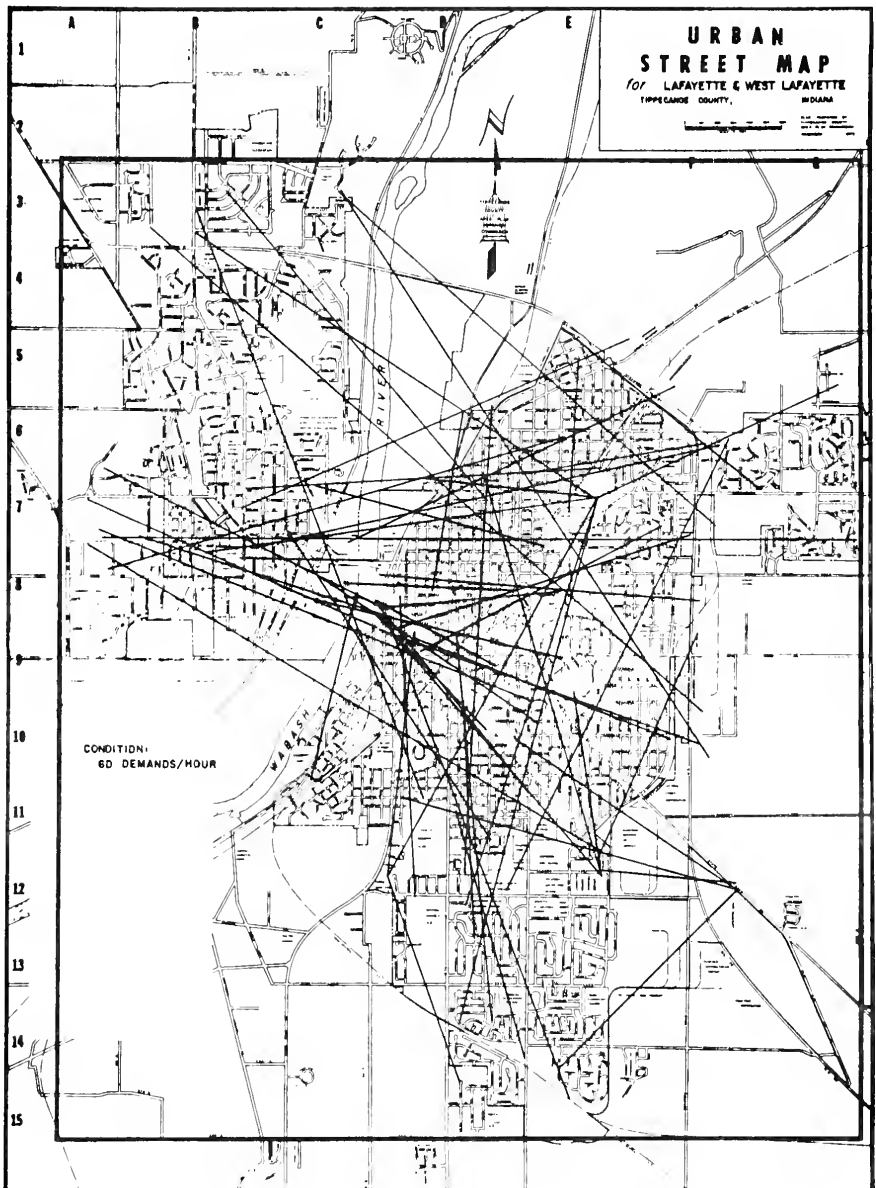
FIGURE C-2 DESIRE LINES OF TRAVEL OF
SIMULATION RUN NUMBER I
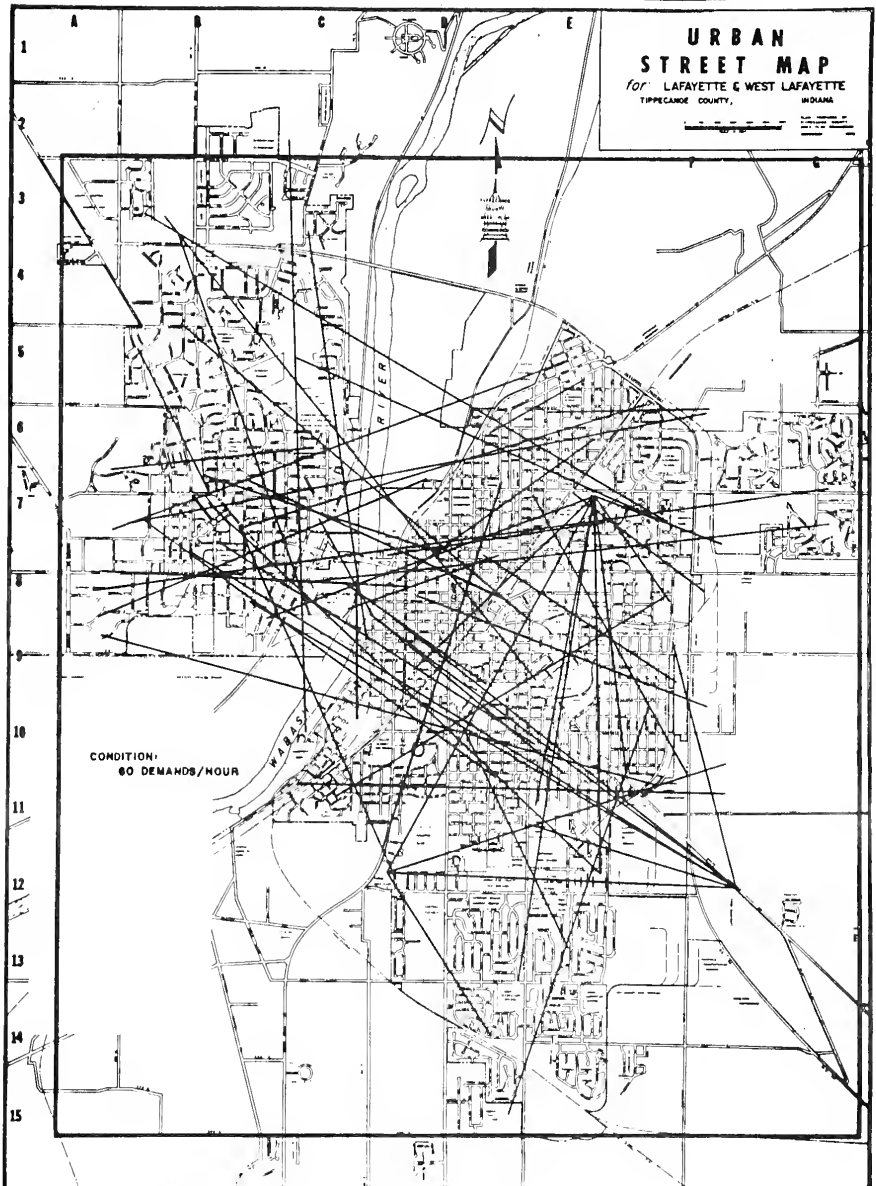
FIGURE C-3 DESIRE LINES OF TRAVEL OF
SIMULATION RUN NUMBER 2
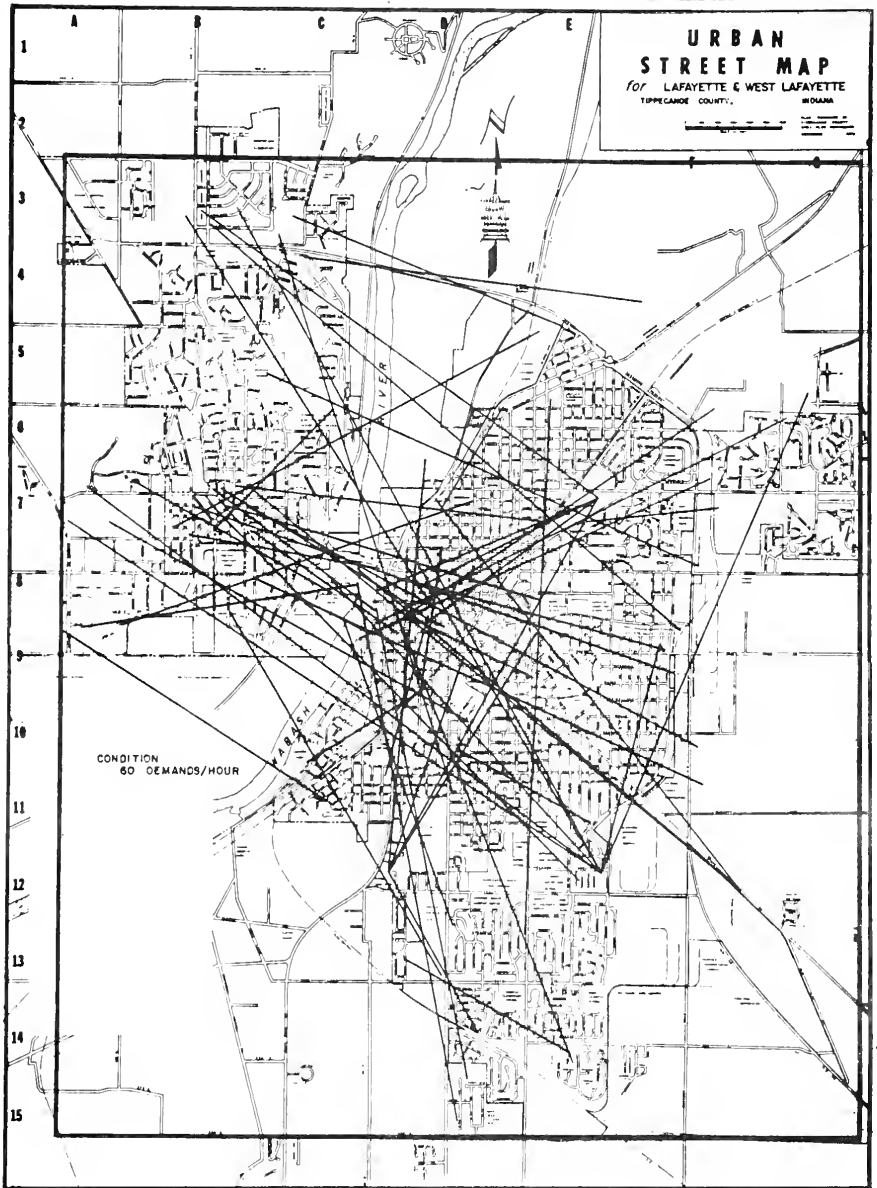
FIGURE C-4 DESIRE LINES OF TRAVEL OF
SIMULATION RUN NUMBER 3
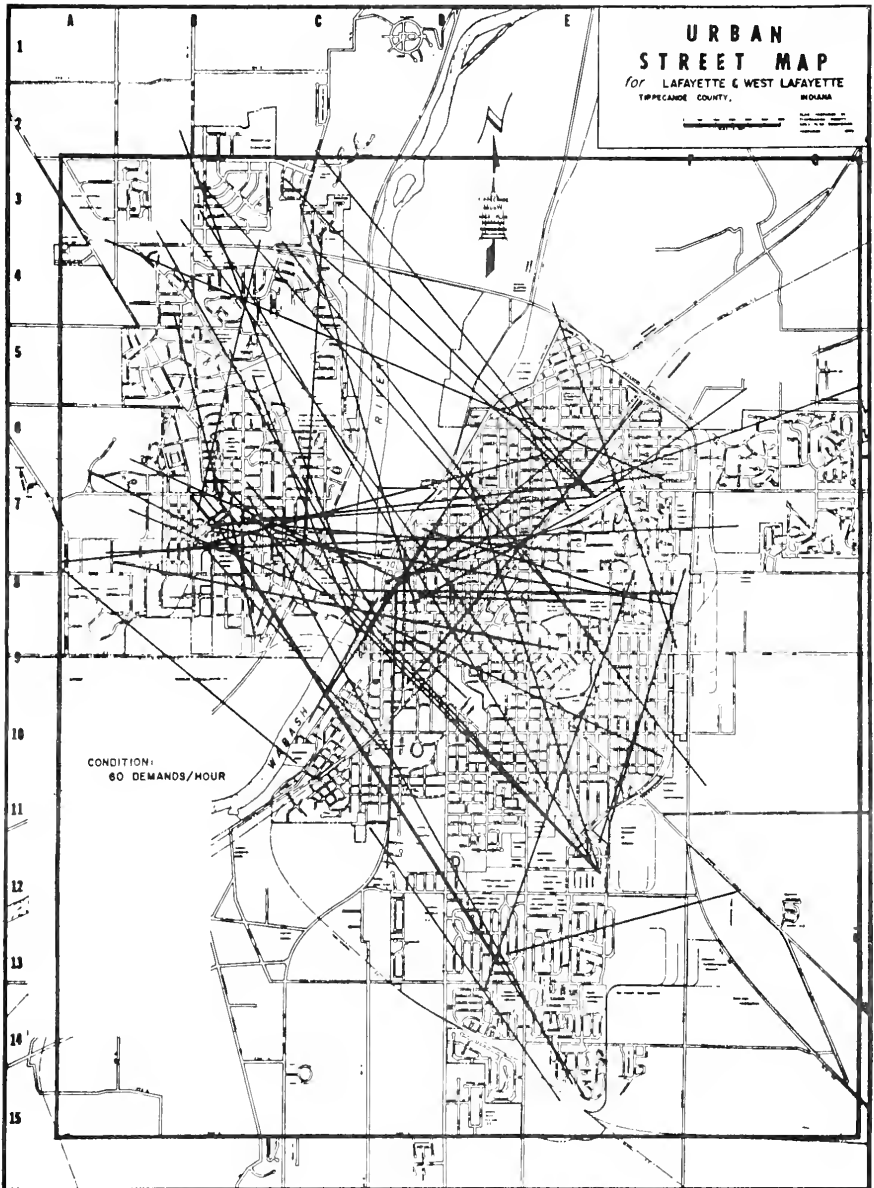
FIGURE C-5 DESIRE LINES OF TRAVEL OF
SIMULATION RUN NUMBER 4

APPENDIX D

Appendix D tabulates the results of the different simulation experiments.

TABLE D-1   MEAN LEVEL OF SERVICE, VEHICLE PRODUCTIVITY, AND PERCENT TIME VEHICLE UNASSIGNED FOR THE DIFFERENT SIMULATION RUNS

Number of Buses	Demands per Hour	Run Number	Mean Level of Service	Avg.	Vehicle Productivity	Avg.	Percent Time Vehicle Unassigned	Avg.
10	30	1	1.41		3.85		29.47	
		2	1.14	1.32	3.56	3.83	37.96	32.89
		3	1.47		4.39		22.82	
		4	1.24		3.50		41.31	
10	60	1	1.88		7.69		5.75	
		2	1.69	1.82	6.53	7.08	11.87	7.03
		3	2.02		7.71		5.40	
		4	1.68		6.40		5.08	
10	90	1	2.40		10.60		0.81	
		2	2.16	2.26	9.87	10.08	2.09	1.26
		3	2.40		10.23		0.79	
		4	2.09		9.60		1.35	
10	120	1	3.19		13.74		0.28	
		2	2.57	2.86	13.23	13.33	0.43	0.39
		3	2.92		13.91		0.33	
		4	2.74		12.44		0.50	
10	150	1	3.50		17.11		0.12	
		2	3.33	3.29	16.08	16.64	0.20	0.17
		3	3.18		17.31		0.15	
		4	3.15		16.06		0.19	

TABLE D-1   (Cont.)

Number of Buses	Demands per Hour	Run Number	Mean Level of Service	Avg.	Vehicle Productivity	Avg.	Percent Time Vehicle Unassigned	Avg.
5	60	1	3.88	3.62	14.81	13.71	0.00	0.00
		2	3.33		12.97		0.00	
		3	3.91		14.41		0.00	
		4	3.35		12.65		0.00	
8	60	1	2.34		9.08		1.06	
		2	2.02	2.22	8.26	8.65	4.63	2.17
		3	2.42		9.31		1.13	
		4	2.10		7.96		1.85	
12	60	1	1.58		6.37		13.10	
		2	1.42	1.50	5.39	5.89	21.00	16.72
		3	1.61		6.37		14.31	
		4	1.38		5.41		18.47	
5	30	1	2.40		7.62		1.10	
		2	2.03	2.30	6.78	7.39	1.32	1.53
		3	2.60		8.50		0.44	
		4	2.16		6.67		3.25	
12	120	1	2.50		11.52		0.39	
		2	2.24	2.31	11.17	11.13	0.57	0.66
		3	2.21		11.33		0.68	
		4	2.28		10.51		1.00	

TABLE D-1   (Cont.)

Number of Buses	Demands per Hour	Run Number	Mean Level of Service		Vehicle Productivity		Percent Time Vehicle Unassigned	
				Avg		Avg.	Vehicle	Avg.
14	150	1	2.37		12.26		0.59	
		2	2.27	2.27	11.47	11.76	0.31	0.62
		3	2.27		12.49		0.58	
		4	2.15		11.22		1.00	

TABLE D-2   MAXIMUM AND MEAN SERVICE TIMES FOR THE DIFFERENT SIMULATION RUNS

Number of Buses	Demands per Hour	Run Number	Maximum Waiting Time	Avg	Mean Waiting Time	Avg	Maximum Travel Time	Avg	Mean Travel Time	Avg	Maximum Total Time	Avg	Mean Total Time	Avg
10	30	1	15.56	16.63	7.49	6.51	25.77	29.67	10.95	11.59	38.46	36.04	18.44	18.10
		2	20.48		5.09		28.88		11.17		33.19		16.27	
		3	17.38		7.68		39.15		12.21		40.86		19.89	
		4	13.08		5.77		24.86		12.03		31.63		17.80	
10	60	1	31.23	29.71	11.19	10.47	45.79	45.04	14.34	14.94	61.26	59.95	25.53	25.41
		2	24.45		9.96		51.29		14.89		67.39		24.85	
		3	37.62		11.72		43.09		15.51		61.79		27.23	
		4	25.55		9.02		39.99		15.02		49.34		24.04	
10	90	1	45.95	45.77	17.07	14.41	67.51	60.81	16.92	17.72	93.89	82.46	33.99	32.13
		2	34.53		12.67		55.67		17.90		72.70		30.56	
		3	45.31		15.71		61.12		18.13		76.36		33.84	
		4	57.30		12.19		58.95		17.92		86.90		30.12	
10	120	1	65.60	59.79	21.52	18.94	68.87	73.43	21.28	20.78	94.49	93.84	42.79	39.71
		2	55.71		16.96		85.61		19.76		90.20		36.72	
		3	62.49		19.21		67.18		21.32		96.20		40.53	
		4	55.35		18.06		72.04		20.74		94.47		38.80	
10	150	1	103.83	79.36	24.53	22.38	93.63	77.69	24.41	24.17	139.66	119.85	48.94	46.55
		2	81.21		22.71		79.70		24.73		126.15		47.44	
		3	63.28		20.87		63.76		22.42		100.50		43.30	
		4	69.12		21.42		73.66		25.12		113.08		46.53	

TABLE D-2 (Cont.)

Number of Buses	Demands per Hour	Run Number	Maximum Waiting Time	Avg.	Mean Waiting Time	Avg.	Maximum Travel Time	Avg.	Mean Travel Time	Avg.	Maximum Total Time	Avg.	Mean Total Time	Avg.
5	60	1	74.75		30.34		117.52		21.65		129.35		51.99	
		2	81.91	78.67	25.09	27.12	63.98	81.31	22.63	23.33	101.44	114.66	47.73	50.44
		3	83.29		29.88		80.93		24.90		125.93		54.77	
		4	74.71		23.15		62.79		24.12		101.92		47.27	
8	60	1	56.93		16.10		60.26		15.62		75.46		31.71	
		2	43.75	46.43	12.36	14.43	53.20	60.52	16.68	16.83	61.68	76.50	29.04	31.26
		3	48.64		16.86		57.37		17.06		83.98		33.92	
		4	36.41		12.40		71.24		17.96		84.86		30.35	
12	60	1	29.96		8.59		37.04		12.96		50.16		21.55	
		2	24.24	25.85	7.26	7.90	36.58	35.25	13.33	13.17	43.36	47.83	20.59	21.07
		3	30.66		8.92		37.39		13.66		53.28		22.59	
		4	18.52		6.82		29.97		12.71		44.50		19.53	
5	30	1	35.26		16.85		37.51		14.11		57.40		30.96	
		2	41.96	45.25	15.21	15.78	32.58	42.87	13.84	15.93	65.02	67.66	29.05	31.71
		3	56.30		16.93		58.50		19.05		76.01		35.99	
		4	47.47		14.11		42.87		16.73		72.19		30.84	
12	120	1	51.73		16.63		76.96		17.58		82.50		34.21	
		2	37.44	47.51	13.53	14.67	94.08	68.07	18.35	17.65	98.56	81.76	31.88	32.31
		3	52.73		13.34		51.10		17.47		73.03		30.81	
		4	48.12		15.17		50.14		17.18		72.96		32.35	

TABLE D-2 (Cont.)

Number of Buses	Demands per Hour	Run Number	Maximum Waiting Time		Mean Waiting Time		Maximum Travel Time		Mean Travel Time		Maximum Total Time		Mean Total Time	
				Avg		Avg		Avg		Avg		Avg		Avg
14	150	1	42.87	47.33	14.45	13.47	71.62	67.26	18.59	18.75	87.53	83.14	33.03	32.21
		2	43.29		13.40		63.65		19.08		70.34		32.48	
		3	61.46		13.56		70.77		18.51		98.30		32.07	
		4	41.71		12.46		62.98		18.80		76.38		31.26	

TABLE D-3 MEAN LEVEL OF SERVICE BY TRIP LENGTH

Number of Buses	Demands per Hour	Run Number	Trip Length (in miles)									
			(0.75-1)		(1-2)		(2-3)		(3-4)		(4-5)	
			M.L.O.S.*	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.
10	30	1	2.69		2.21		1.78		1.88		1.80	
		2	2.26		1.83		1.41		1.39		1.38	
		3	3.30	2.57	2.35	2.07	1.76	1.68	1.68	1.59	1.56	1.49
		4	2.04		1.88		1.78		1.42		1.23	
10	60	1	3.83		2.83		2.67		2.22		1.87	
		2	3.29		2.59		2.28		2.02		1.93	
		3	5.31	3.94	3.06	2.81	2.44	2.33	2.23	2.10	1.95	1.91
		4	3.32		2.77		1.94		1.91		1.87	
10	90	1	6.03		3.60		3.23		2.95		2.74	
		2	4.40		3.30		2.96		2.28		2.17	
		3	5.14	4.92	3.91	3.49	3.03	2.98	2.72	2.64	2.65	2.42
		4	4.12		3.13		2.69		2.60		2.12	
10	120	1	7.35		4.90		4.27		3.47		3.16	
		2	5.55		4.15		3.29		2.76		2.37	
		3	5.77	6.45	4.84	4.58	3.79	3.67	2.85	3.02	2.90	2.67
		4	7.12		4.41		3.34		3.00		2.26	
10	150	1	7.38		5.52		4.71		3.52		3.82	
		2	7.74		5.41		4.12		3.54		3.66	
		3	6.65	7.15	5.14	5.21	4.02	4.25	3.39	3.61	2.88	3.42
		4	6.82		4.78		4.14		3.97		3.32	

TABLE D-3 (Cont.)

Number of Buses	Demands per Hour	Run Number	Trip Length (in miles)									
			(0.75-1)		(1-2)		(2-3)		(3-4)		(4-5)	
			M.L.O.S.	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.	M.L.O.S.	Avg.
5	60	1	7.88	8.40	6.24	5.79	4.90	4.59	3.88	3.86	4.22	3.49
		2	8.62		5.65		3.94		3.56		2.84	
		3	9.25		6.05		4.91		4.64		3.86	
		4	7.86		5.21		4.59		3.35		3.03	
8	60	1	5.26	5.06	3.60	3.43	3.08	2.89	2.58	2.27	2.62	2.38
		2	4.20		3.24		2.67		1.84		2.18	
		3	6.20		3.48		3.12		2.59		2.41	
		4	4.59		3.40		2.67		2.06		2.32	
12	60	1	2.86	2.84	2.43	2.31	2.21	1.98	1.66	1.67	1.74	1.60
		2	2.65		2.13		1.99		1.63		1.45	
		3	2.99		2.53		1.99		1.68		1.69	
		4	2.84		2.15		1.71		1.72		1.50	
5	30	1	6.55	4.97	3.79	3.51	2.84	3.09	2.71	2.49	2.69	2.13
		2	4.24		3.10		2.94		2.47		1.24	
		3	5.91		3.72		3.52		2.46		3.00	
		4	3.17		3.44		3.07		2.32		1.60	
12	120	1	5.38	4.92	3.96	3.68	3.08	2.87	3.31	2.83	2.50	2.33
		2	4.37		3.56		2.79		3.06		2.19	
		3	4.49		3.54		2.77		2.65		2.38	
		4	5.45		3.65		2.84		2.31		2.24	

TABLE D-3 (Cont.)

Number of Buses	Demands per Hour	Run Number	Trip Length (in miles)									
			(0.75-1)		(1-2)		(2-3)		(3-4)		(4-5)	
			MLOS	Avg.	MLOS	Avg.	MLOS	Avg.	MLOS	Avg.	MLOS	Avg.
14	150	1	5.47		3.66		3.02		2.82		2.40	
		2	4.98	4.76	3.68	3.62	2.75	2.86	2.75	2.69	2.66	2.56
		3	4.08		3.64		3.08		2.57		2.62	
		4	4.49		3.50		2.59		2.63		2.55	

* MLOS = MEAN LEVEL OF SERVICE

VITA

VITA

Antoine G. Hobeika was born September 1943 in Homsieh, Lebanon. He completed his secondary education at the International College of Beirut and received his Lebanese Baccalaureate Part II (Mathematics) in 1963.

He entered the American University of Beirut and received his Bachelor of Engineering (Major: Civil) in 1967. He was also awarded Engineering Honors.

In 1967, he worked as a site engineer for Salem Brothers in the ESSO Gas Liquification Plant at Morsa-Brega, Libya. In 1968 he was appointed a graduate assistant at the American University of Beirut and received his M.E. (Major: Civil) in 1970. During that period, he also worked as a design engineer for the Office of Reconstruction, Ministry of Public Works, Lebanon. In 1970-71 he received the International Road Federation Fellowship to study at Purdue University. Since then he has been appointed as a research assistant.

He is a member of Lebanese Order of Engineers, a member of Lebanese Society of Environmental Engineers, a student member of Institute of Traffic Engineers, and an associate member of Sigma Xi.